



3 Phase STAR Motor



<http://www.casa.co.nz>

Edition: 22/08/2011

Type: KP5R15-008

General Data

Brand: Japan Servo (Japan)

Type #: KP5R15-008

OEM #: 810047 (?) 246200-004B

Frame: NEMA Instrument + Heatsink

Steps: 24 / rev (15 degrees per step or finer with micro-stepping if facilitated)

Current: 5.2 Amp

Volts: 12 Vdc

Torque: ____ Nm @ ____A (____ oz.in.)

Resistance: ~2.3 Ohms / phase (nominal)

Inductance: ~5 mH / phase (nominal)

Connector: 5 wire x 0.25" if fitted (see diag.)

Wires: 4 wire (50~400 mm nominal)

Shaft: 6.35 mm dia x 30 + 12mm double-ended

Shaft-Detail: Plain (flatted at end)


Size: 70 x 60 x 100 mm (nominal)

Weight: 0.930 kg

Supply-Max: ____ Vdc (recommended max = V x ____)

Condition: Used (refurbished)

Comments: may have OPTIONAL timing pulley

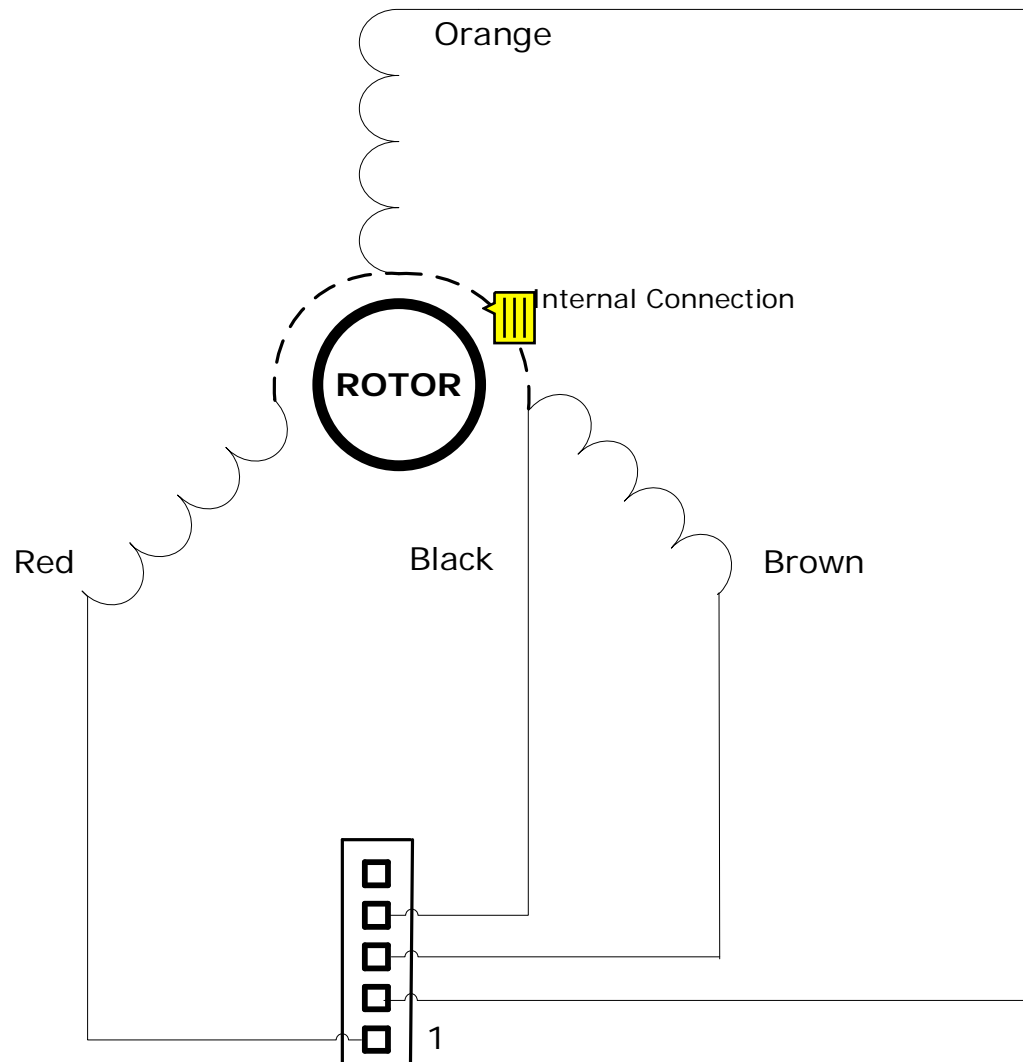

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.