



## TECHNICAL DATA

7815

7815R

PLANAR TRIODES

The EIMAC 7815 and 7815R are rugged ceramic/metal planar triodes designed for use in CW, grid- or plate-pulsed oscillator, amplifier or frequency multiplier service up to 3 GHz. The tubes may also be used in pulse modulator or voltage regulator service. The 7815R is normally supplied with an air cooled radiator for forced air cooling, while the 7815 is supplied without radiator and is intended for conduction-convection cooling as found in many pulsed type applications. Except for the plate dissipation ratings and outline, the characteristics of both tube types are identical.

The 7815 and 7815R feature high mu, high transconductance, great mechanical strength and low interelectrode capacitances, as well as high current capability and increased grid-anode insulator length. Both tubes have an arc-resistant, extended interface cathode, well proven in airline applications, assuring reliable and long life operation under adverse conditions.

Note: This data sheet also covers the 3CPN10A5 (same as 7815) and 3CPX100A5 (same as 7815R).

GENERAL CHARACTERISTICS<sup>1</sup>

## ELECTRICAL

Cathode: Oxide Coated, Unipotential

Heater: Voltage .....	6.0 ± 0.3 V
Current, at 6.0 volts .....	1.00 A
Transconductance (Average):	
$I_b = 70 \text{ mA}$ , ( $E_b = 600 \text{ Vdc}$ ) .....	25 mmhos
Amplification Factor (Average) .....	100
Direct Interelectrode Capacitance (grounded cathode) <sup>2</sup> , without heater voltage:	
$C_{in}$ .....	6.3 pF
$C_{gp}$ .....	1.98 pF
$C_{out}$ .....	0.035 pF
Cut-off Bias <sup>3</sup> (maximum).....	-25 V

1. Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. EIMAC Division of Varian should be consulted before using this information for final equipment design.
2. Capacitance values are for a cold tube as measured in a special shielded fixture. When the cathode is heated to the proper temperature, the grid-cathode capacitance will increase from the cold value by approximately 1 pF due to thermal expansion of the cathode.
3. Measured with one milliampere plate current and a plate voltage of 1 kVdc.



7815

7815R

**MECHANICAL**

## Maximum Overall Dimensions:

Length . . . . .	2.701 in; 68.60 mm
Diameter (7815) . . . . .	1.195 in; 30.35 mm
Diameter (7815R) . . . . .	1.264 in; 32.11 mm
Net Weight (7815) . . . . .	1.8 oz; 48 gm
Net Weight (7815R) . . . . .	2.2 oz; 63 gm
Operating Position . . . . .	Any
Maximum Operating Temperature:	
Ceramic/Metal Seals . . . . .	250°C
Anode Core . . . . .	250°C
Cooling (7815) . . . . .	Conduction and Convection
Cooling (7815R) . . . . .	Forced Air
Terminals . . . . .	Coaxial, special

**ENVIRONMENTAL**

Shock, 11 ms, non-operating . . . . .	60 G
Vibration, operating, all axes 55 to 500 Hz . . . . .	10 G
Altitude, max (in a suitably designed circuit) . . . . .	70,000 ft.

**CW RF POWER AMPLIFIER OR OSCILLATOR**

## ABSOLUTE MAXIMUM RATINGS

DC PLATE VOLTAGE . . . . .	2500 VOLTS
DC GRID VOLTAGE . . . . .	-150 VOLTS
INSTANTANEOUS PEAK GRID-CATHODE VOLTAGE	
Grid negative to cathode . . . . .	-400 VOLTS
Grid positive to cathode . . . . .	30 VOLTS
DC PLATE CURRENT . . . . .	100 MILLIAMPERES
DC GRID CURRENT . . . . .	50 MILLIAMPERES
AVERAGE PLATE DISSIPATION	
Conduction and Convection (7815) . . . . .	10 WATTS
Forced Air Cooling (7815R) . . . . .	100 WATTS
GRID DISSIPATION (Average) . . . . .	2 WATTS
FREQUENCY . . . . .	2.5 GHz

## OPERATING CONDITIONS FOR 7815 AND 7815R IN REPRESENTATIVE APPLICATION

## Grounded Grid CW Power Amplifier

Frequency . . . . .	500 MHz
Heater Voltage . . . . .	6.0 V
DC Plate Voltage . . . . .	900 Vdc
DC Grid Voltage (approx) . . . . .	-40 Vdc
DC Cathode Current . . . . .	90 mAdc
DC Grid Current . . . . .	25 mAdc
Drive Power (approx) . . . . .	6 W
Useful CW Power Output . . . . .	40 W

## Grounded Grid CW Oscillator

Frequency . . . . .	2.5 GHz
Heater Voltage . . . . .	5.0 V
DC Plate Voltage . . . . .	900 Vdc
DC Grid Voltage (approx) . . . . .	-20 Vdc
DC Plate Current . . . . .	90 mAdc
DC Grid Current . . . . .	10 mAdc
Useful CW Power Output . . . . .	17 W

**GRID PULSED OR PLATE PULSED AMPLIFIER OR OSCILLATOR**

## ABSOLUTE MAXIMUM RATINGS

DC PLATE VOLTAGE (GRID PULSED) . . . . .	2500 VOLTS
PEAK PULSE PLATE VOLTAGE (PLATE PULSED) . . . . .	3500 VOLTS
DC GRID VOLTAGE . . . . .	-150 VOLTS
INSTANTANEOUS PEAK GRID-CATHODE VOLTAGE	
Grid negative to cathode . . . . .	-700 VOLTS

Grid positive to cathode . . . . .	250 VOLTS
PULSE PLATE CURRENT . . . . .	3.0 AMPERES
PULSE GRID CURRENT . . . . .	1.8 AMPERES
AVERAGE PLATE DISSIPATION	
Conduction and Convection (7815) . . . . .	10 WATTS
Forced Air Cooling (7815R) . . . . .	100 WATTS
GRID DISSIPATION (Average) . . . . .	2 WATTS
FREQUENCY . . . . .	3.0 GHz
PULSE DURATION <sup>1</sup> . . . . .	6 μs
DUTY FACTOR <sup>1</sup> . . . . .	.0033

**OPERATING CONDITIONS FOR 7815 AND 7815R IN  
REPRESENTATIVE APPLICATION**

**Grid Pulsed Amplifier**

Frequency . . . . .	1.1 GHz
Heater Voltage . . . . .	6.0 V
DC Plate Voltage . . . . .	2200 Vdc
DC Grid Voltage . . . . .	-45 Vdc
Peak Video Plate Current . . . . .	1.9 a
Peak Video Grid Current . . . . .	1.1 a
Pulse Drive Power (approx) . . . . .	400 w
Useful Power Output (approx) . . . . .	2000 w
Pulse Duration . . . . .	3 $\mu$ s
Duty Factor . . . . .	.002

<b>Plate Pulsed Oscillator</b>	
Frequency . . . . .	3.0 GHz
Heater Voltage . . . . .	5.8 V
Peak Plate Voltage . . . . .	3500 v
Peak Video Plate Current . . . . .	3.0 a
Peak Video Grid Current . . . . .	1.8 a
Useful Power Output (approx) . . . . .	1600 w
Pulse Duration . . . . .	3 $\mu$ s
Duty Factor . . . . .	.0025

1. For application requiring longer pulse duration and/or higher duty cycle consult the nearest Varian Electron Tube & Device Field Office, or the Product Manager, EIMAC Division of Varian, Salt Lake City, Utah.

**PULSE MODULATOR OR PULSE AMPLIFIER  
SERVICE**

**ABSOLUTE MAXIMUM RATINGS**

DC PLATE VOLTAGE . . . . .	2500 VOLTS
PEAK PLATE VOLTAGE . . . . .	3500 VOLTS
DC GRID VOLTAGE . . . . .	-150 VOLTS
<b>INSTANTANEOUS PEAK GRID-CATHODE VOLTAGE</b>	
Grid negative to cathode . . . . .	-700 VOLTS
Grid positive to cathode . . . . .	150 VOLTS
PULSE CATHODE CURRENT . . . . .	4.8 AMPERES
DC PLATE CURRENT . . . . .	100 MILLIAMPERES

**AVERAGE PLATE DISSIPATION**

Conduction and Convection (7815) . . . . .	10 WATTS
Forced Air Cooling (7815R) . . . . .	100 WATTS
<b>GRID DISSIPATION (Average)</b> . . . . .	
PULSE DURATION <sup>1</sup> . . . . .	2 WATTS
DUTY FACTOR <sup>1</sup> . . . . .	6 $\mu$ s
CUT-OFF MU . . . . .	.0033
	70

1. For application requiring long pulse duration and/or higher duty cycle consult the nearest Varian Electron Tube & Device Field Office, or the Product Manager, EIMAC Division of Varian, Salt Lake City, Utah.

**RANGE VALUES FOR EQUIPMENT DESIGN**


	<u>Min.</u>	<u>Max.</u>
Heater: Current at 6.0 volts . . . . .	0.90	1.05 A
Cathode Heating Time . . . . .	60	--- sec.
<b>Interelectrode Capacitances<sup>1</sup> (grounded cathode connection)</b>		
Cin . . . . .	5.60	7.00 pF
Cout . . . . .	---	0.035 pF
Cgp . . . . .	1.85	2.10 pF

1. Capacitance values for a cold tube as measured in a special shielded fixture. When the cathode is heated to the proper temperature, the grid-cathode capacitance will increase from the cold value by approximately 1 pF due to thermal expansion of the cathode.






**APPLICATION**

For general application information please refer to the Planar Triode Operating Instruction Sheet. The operating instructions should be consulted prior to the designing of new requirements around the above tube types. Plate dissipation of up to 150 watts is possible with the 7815/7815R tube type when using radiator P/N 158555. If this is

required the tube order should include a reference to the different radiator part number. For unusual and special application consult the nearest Varian Electron Tube and Device Field Office, or the Product Manager, EIMAC Division of Varian, Salt Lake, City, Utah.

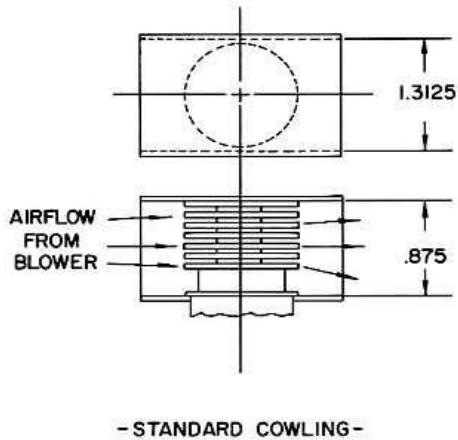AIRFLOW vs STATIC PRESSURE WITH  
STANDARD COWLING JAN-157

## MAXIMUM PLATE DISSIPATION vs COOLING AIRFLOW

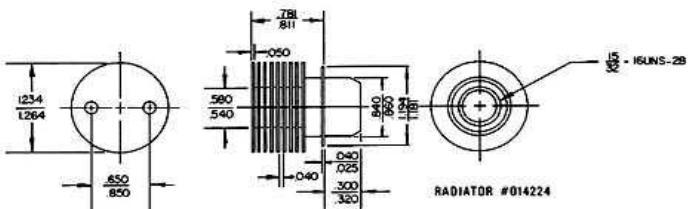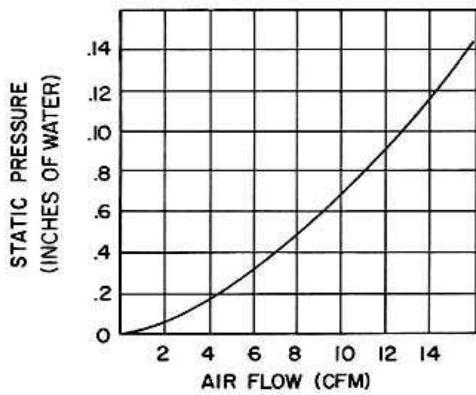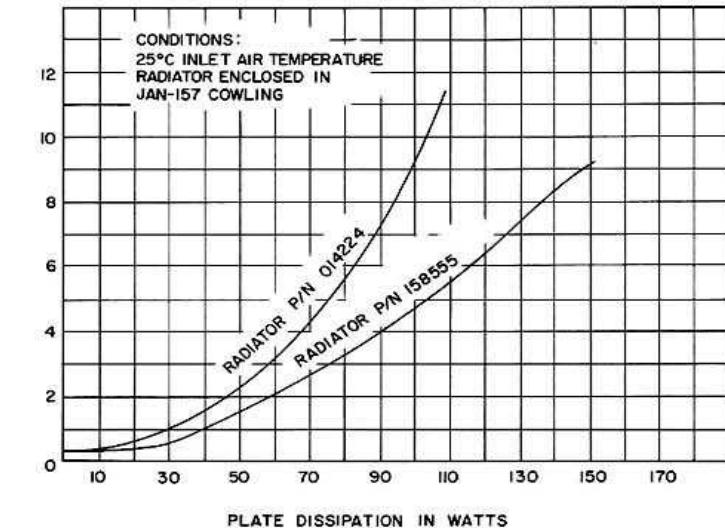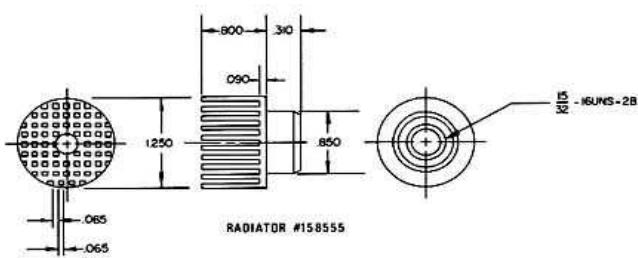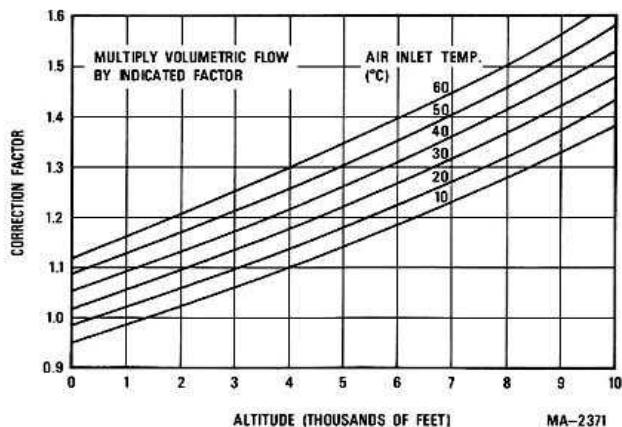COMBINED CORRECTION FACTORS FOR INLET AIR TEMPERATURE  
AND ALTITUDE  
(RELATIVE TO 25°C AND SEA LEVEL)





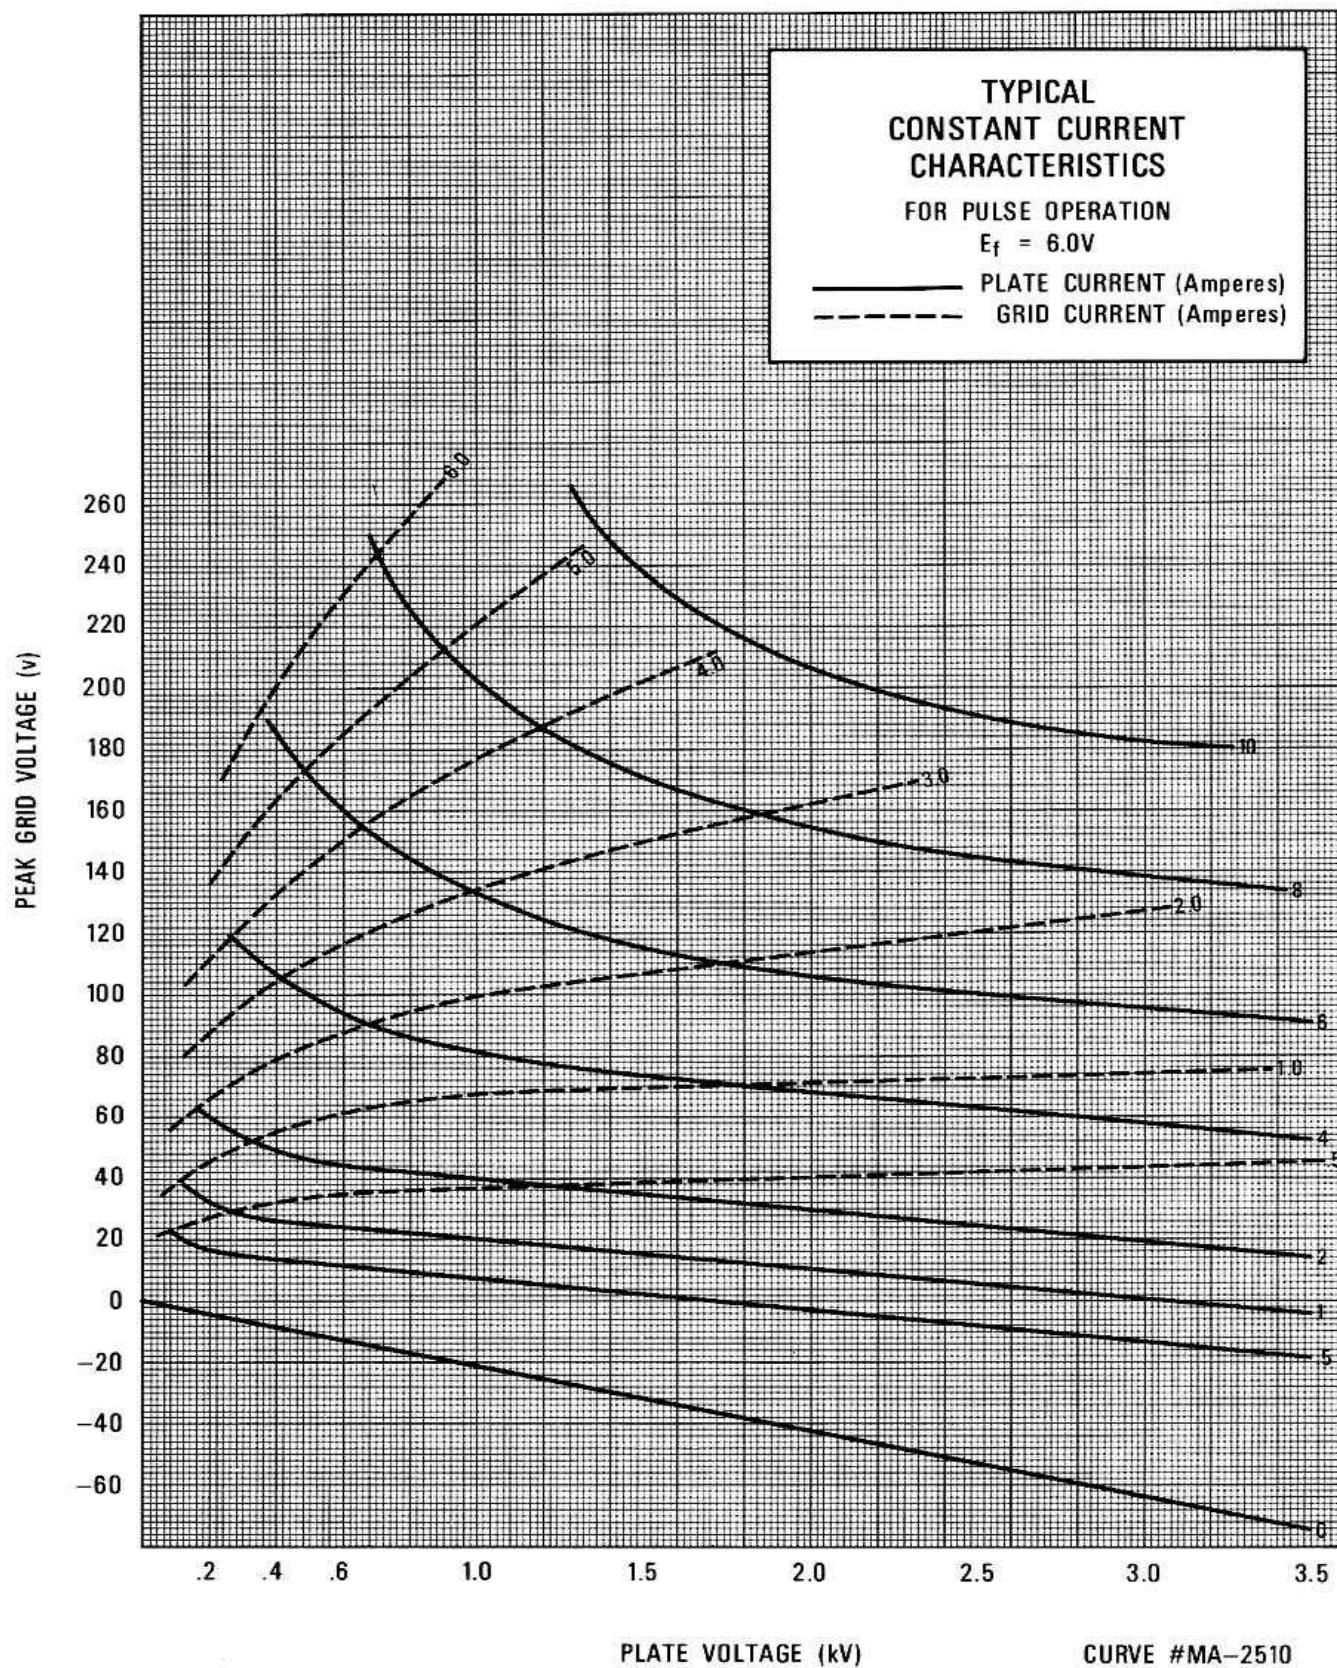


PLATE VOLTAGE (kV)

CURVE #MA-2510

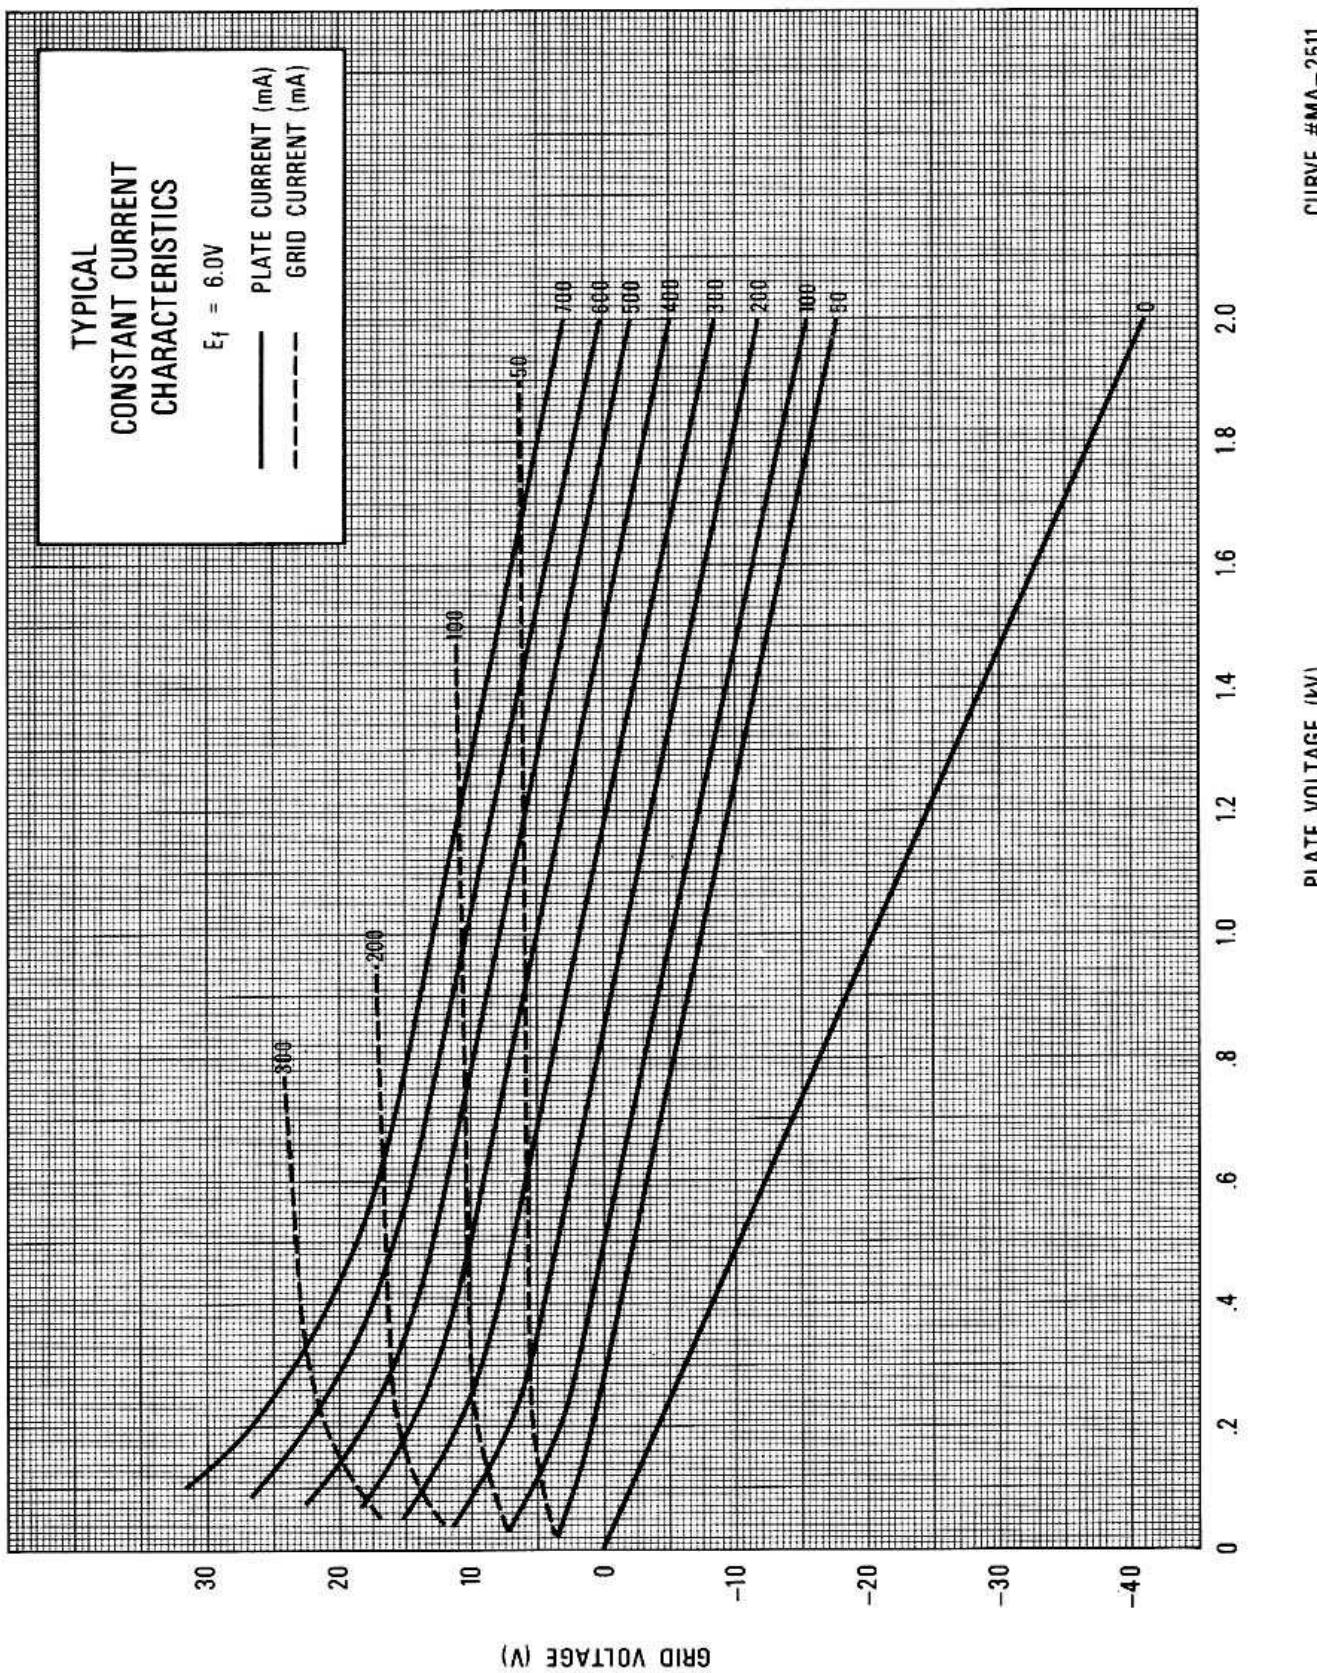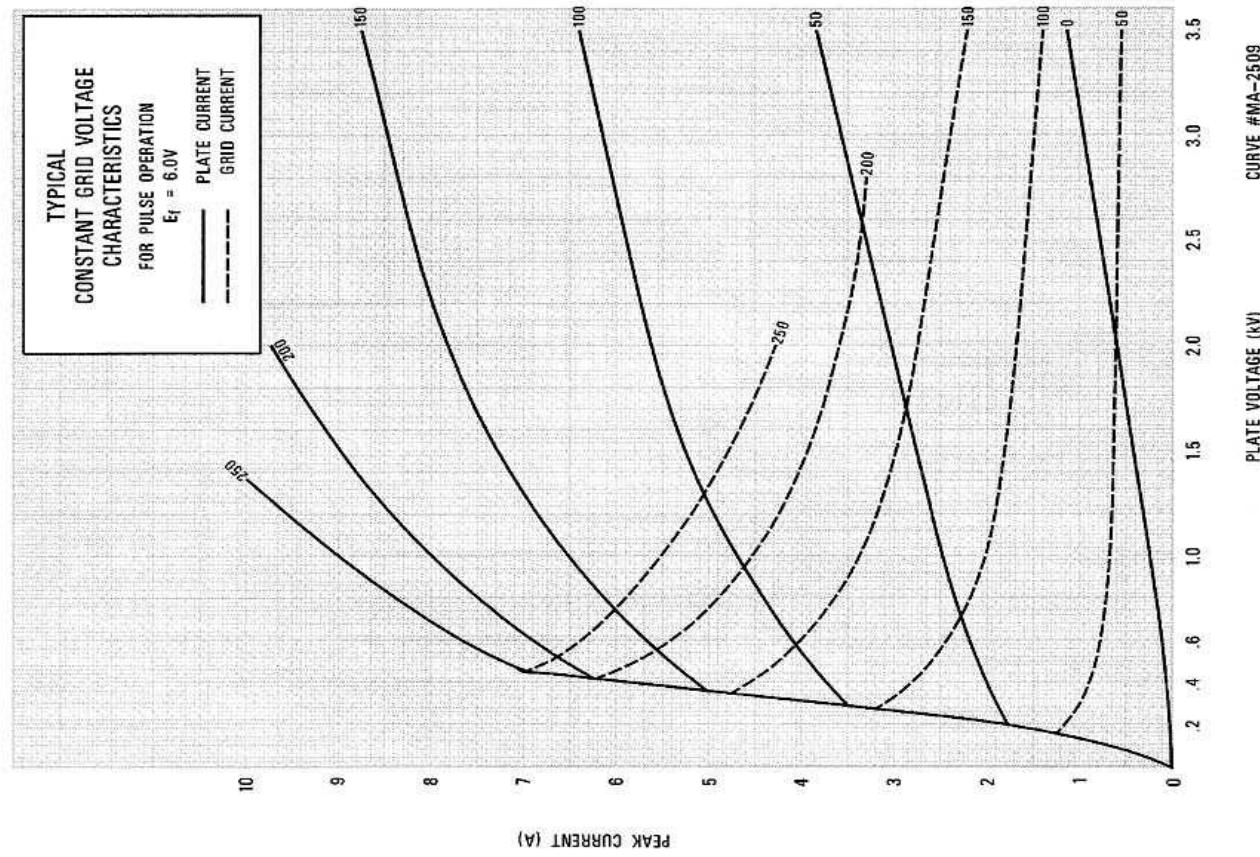

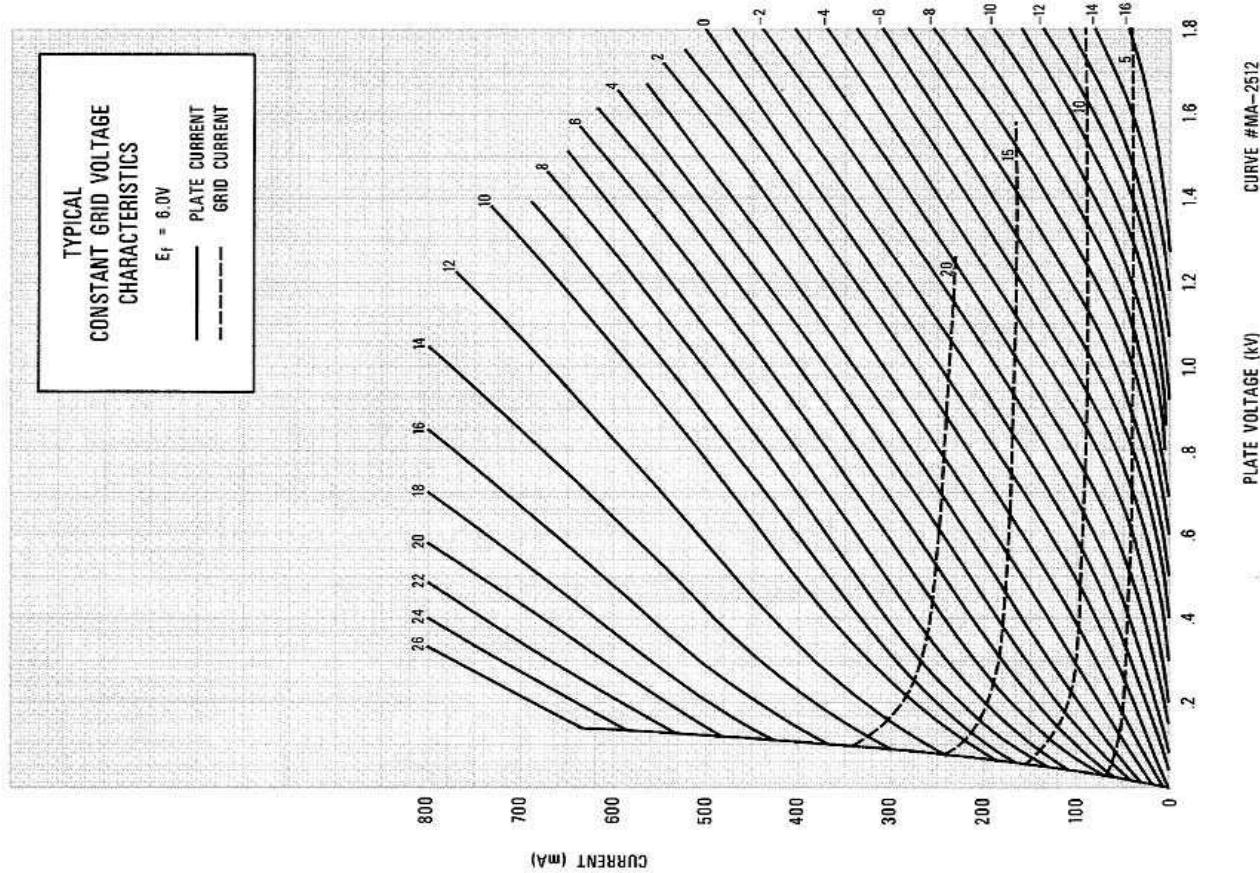

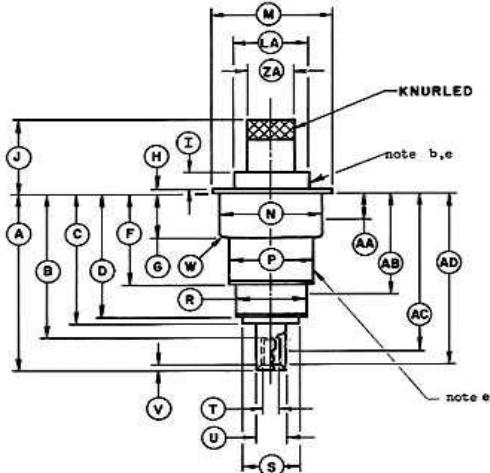

7815

ELECTRODE CONTACT AREA (see note a,f)				DIMENSION DATA (Note a)			
DIM.	MIN.	MAX.	MIN.	MAX.	DIM.	IN INCHES	DIM. IN MILLIMETERS
AA	.035	.361	.89	9.17	MIN.	MAX.	MIN. MAX. NOTES
AB	1.185	1.265	30.10	32.14	1.815	1.875	A 46.10 117.62
AC	1.534	1.728	38.96	43.89	1.534	B	38.96
AD	1.475	1.815	37.47	46.10	1.475	C	37.46
					1.289	1.329	D 32.74 33.76
					.970	1.010	F 24.64 25.65
					.462	.477	G 11.73 12.12
					.040	H	1.02
					.185	I	4.70
					.766	.826	J 19.46 20.98
					1.180	1.195	K 29.97 30.35
					1.025	1.035	L 26.04 26.29
					.752	.792	P 19.10 20.12
					.655	R	16.64 16.89
					.545	S	13.84
					.213	.223	T 5.41 5.66
					.315	.325	U 8.00 8.26
					.086	V	2.18
					.100	W	2.54
					.840	.860	LA 21.34 21.54
					.427	.447	ZA 10.85 11.35

## NOTES:

a.. Metric equivalents, to the nearest .01 mm, are given for general information only & are based on 1 inch = 25.4 mm.

b. This surface shall be used to measure Anode Shank temperature.


c. Eccentricity of contact surfaces shall be gaged from center line of reference & shall be as follows; note 2 shall apply:

Contact Surface	TIR Max.	Reference
Anode	.020	Cathode
Grid	.020	Cathode
Heater	.012	Cathode

d. Dims. N,R,T,U shall apply throughout entire contact area as defined by dims. AA,AB, AC,AD respectively.

e. This surface shall not be used for clamping or locating.

f. Electrode Contact Dims. are given for socket design purposes & are not intended for inspection purposes.

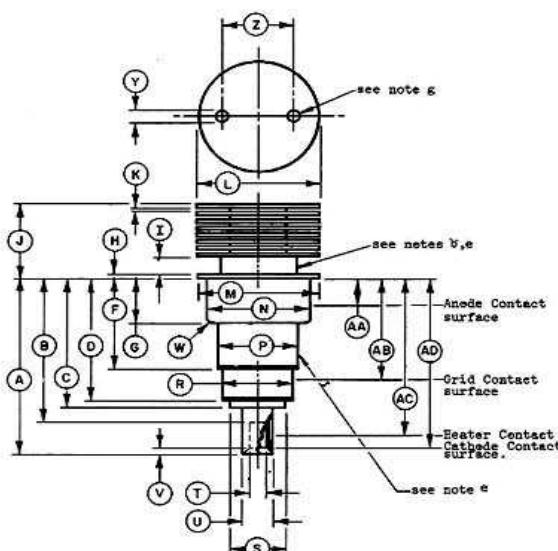

7815R

ELECTRODE CONTACT AREA (Note a,f)		DIMENSION DATA (Note a)	
Dim. in Inches	Dim. in Millimeters	Dim. in Inches	Dim. in Millimeters
AA	.035	.361	.89
AB	1.185	1.265	30.10
AC	1.534	1.728	38.96
AD	1.475	1.815	37.47

ELECTRODE CONTACT AREA (Note a,f)		DIMENSION DATA (Note a)	
Dim. in Inches	Dim. in Millimeters	Dim. in Inches	Dim. in Millimeters
AA	.361	A	46.10
AB	1.265	B	38.96
AC	1.728	C	37.46
AD	1.815	D	32.74
		E	11.73
		F	24.64
		G	12.12
		H	1.02
		I	4.70
		J	19.46
		K	29.97
		L	30.35
		M	26.04
		N	26.29
		O	20.12
		P	19.20
		Q	16.64
		R	16.89
		S	13.84
		T	5.41
		U	8.00
		V	2.18
		W	2.54
		X	2.67
		Y	3.68
		Z	16.51
		AA	21.54

## Notes:

a.. Metric equivalents, to the nearest .01 mm, are given for general information only & are based on 1 inch = 25.4 mm.

b. This surface shall be used to measure anode shank temp.

c. Eccentricity of contact surfaces shall be gaged from center line of reference & shall be as follows:

Contact Surface	TIR Max.	Reference
Anode	.020	Cathode
Grid	.020	Cathode
Heater	.012	Cathode

d. Dims. N,R,T & U shall apply throughout entire length as defined by dims. AA,AB,AC,AD respectively.

e. This surface shall not be used for clamping or locating.

f. Electrode Contact Dims. are given for socket design purposes & are not intended for inspection purposes.

g. Holes for tube extractor thru top fin only.