

Primary Battery Lead-Cables for Intelcom Services



<http://www.casa.co.nz>

Edition: 12/07/2022

Type: **RLM6-11QC6-10AWG-0M16-RED(RP4)**

General Data

Description: Battery lead RED 10AWG (6mm²), 160mm long with 1 x M6 + 1 x 1/4" QC pre-insulated (or plain) crimp lugs at ends

Brand: CASA (OEM = TBA)

Model: RLM6-11QC6-10AWG-0M32-RED(RP4)

BOM:
1 x H3134-Utilux or H4127A Non-Insulated Crimp Ring-Lug M6 (1/4") hole for 6mm² (10AWG) cable

1 x Hxxx-Utilux QC-1/4" lug (or H1495A (un-insulated) if 6mm² (10AWG)


160mm 6mm² (10AWG) RED hook-Up wire.

1 x 20mm x 6mm medium wall Heatshrink sleeve.

Weight: xx gms

M6 Ring Lug

1/4" QC Lug

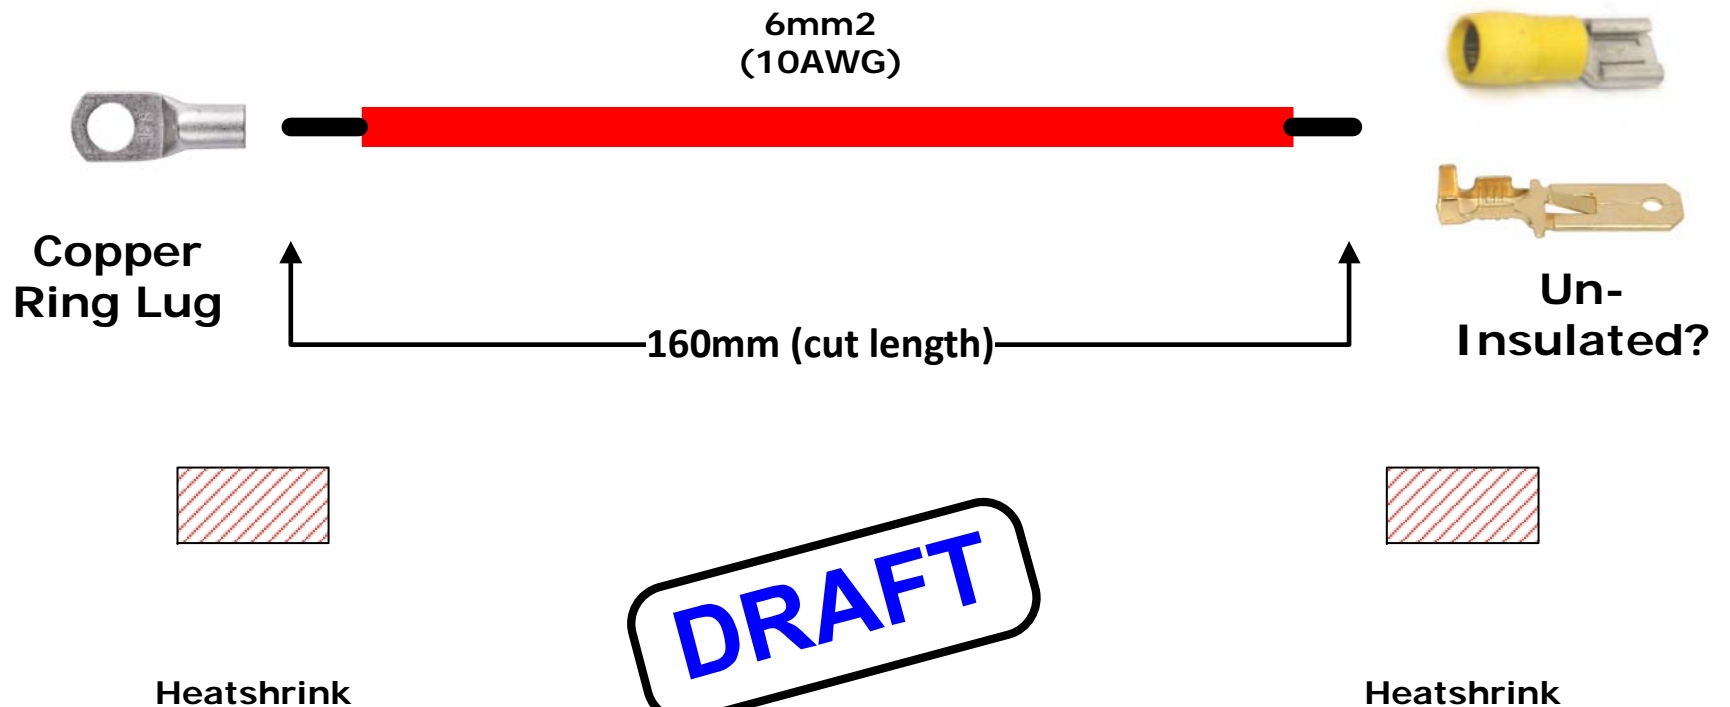

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (*neither expressed nor implied*) for any errors or the consequence therefrom.