



<http://www.casa.co.nz>

Edition: 02/03/2023

# Primary Battery Fused-Lead-Cables for Intelcom Services

**Type: RLM6-PE-FUSE-12AWG-0M23-RED**

## General Data

### Description:

Charger fuse-lead  
RED 12AWG (4mm<sup>2</sup>),  
230mm long for ATC  
and ATO automotive  
fuses with 1 x M6  
Ring Lug (pre-  
insulated) crimp lug  
at 1 end and other  
end pre-stripped for  
EcoMate panel  
socket.

**Brand:** CASA (OEM  
= TBA)

**Model:** RLM6-PE-  
12AWG-0M23-RED  
(RP30)

### BOM:

1 x Pre-Insulated  
Crimp Ring-Lug M6  
(1/4") hole for 4mm<sup>2</sup>  
(12AWG) cable

1 x 30A-CASA (or  
similar) Integrated  
fuse-holder with 4"  
leads extending from  
each end 4mm<sup>2</sup>  
(12AWG) RED or  
YELLOW hook-Up  
wire.

### Optional:

1 x 20mm x 6mm  
medium wall  
Heatshrink sleeve.


**Weight:** xx gms

**30A InLine FuseHolder**  
(for style ATC/ATO Fuses)


**Yellow M6  
Pre-Insulated  
Ring Lug**

**Prepared  
End**

**Note** - Leave insulation  
on till ready to fit  
conductors into socket.

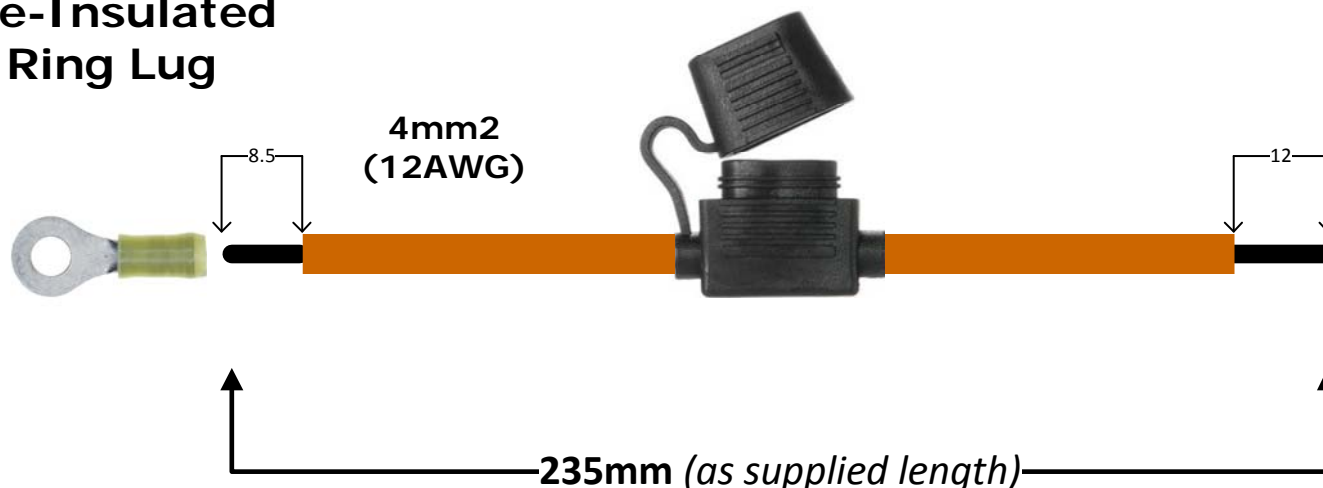

**Option M6 Copper  
Ring Lug**



**Optional  
Heatshrink**

**DRAFT**

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.