

Primary Battery Lead-Cables for CASA's Customers



<http://www.casa.co.nz>

Edition: 07/07/2023



Type: **RLM8-RLM8-4AWG-0M25-OR+HS(R1)**

M8 Ring Lug

M8 Ring Lug

General Data

Description: Battery lead ORNGE 4AWG (25mm²), 250mm long with 2 x M8 un-insulated crimp lugs at ends with fitted heatshrink at ends

Brand: CASA (OEM = TBA)

Model: RLM6-RLM8-14AWG-0M32-OR-HS(R1)


BOM:

2 x H1415-Utilux or CG25M8 **copper** (un-insulated) ring-lug for 25mm² (4AWG)

250mm 25mm² (4AWG) ORANGE welding-cable (tinned copper fine strand (or other cable to order))

2 x 35mm x 16mm medium wall Heatshrink sleeve.

Weight: xx gms

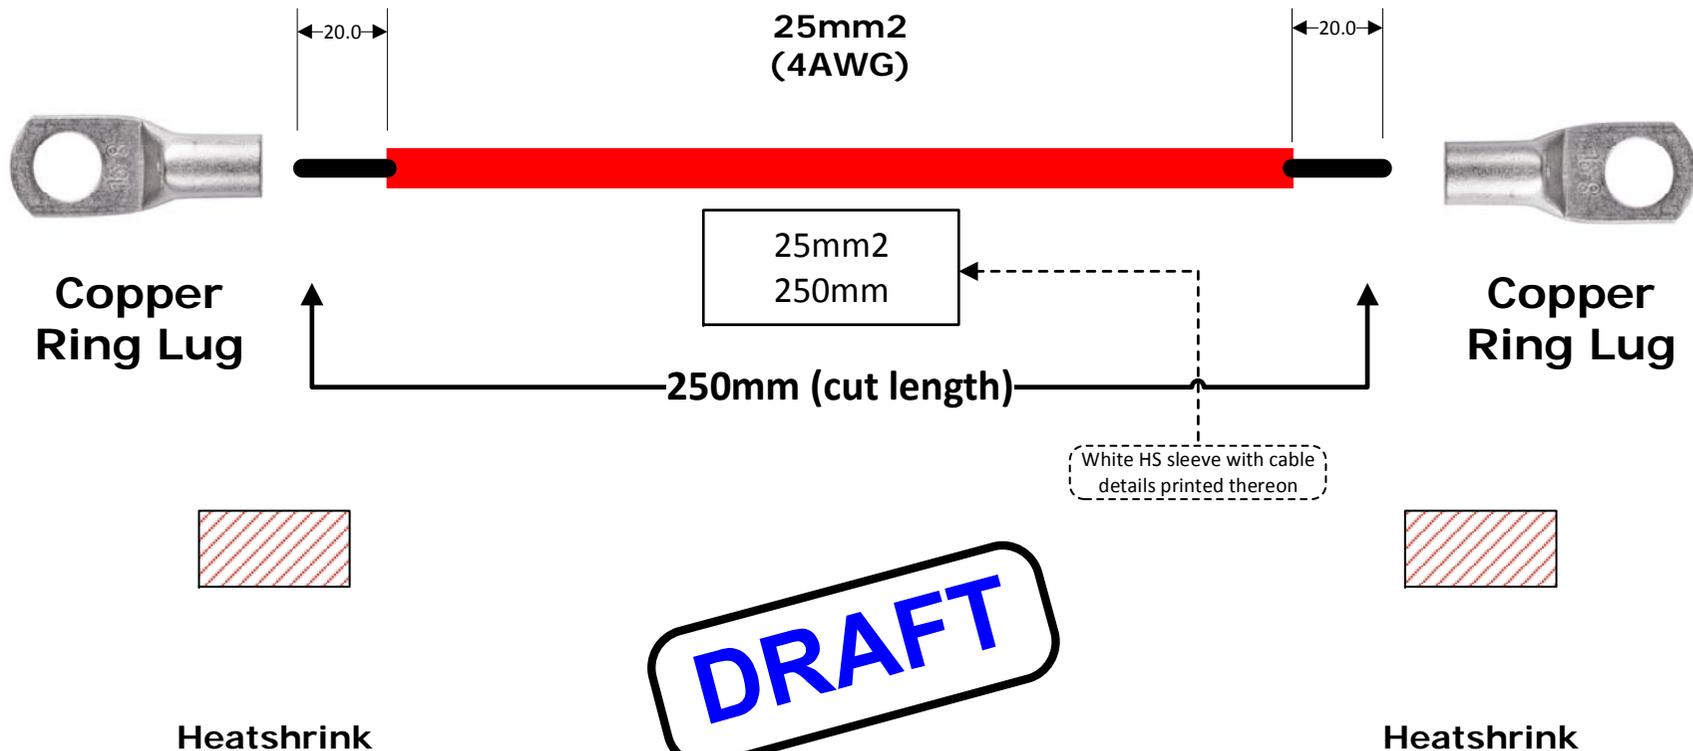

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.