




1/4" Superflexible High Power, High Temperature, Plenum, Fluoropolymer Foam Dielectric, ETS Series – 50-ohm

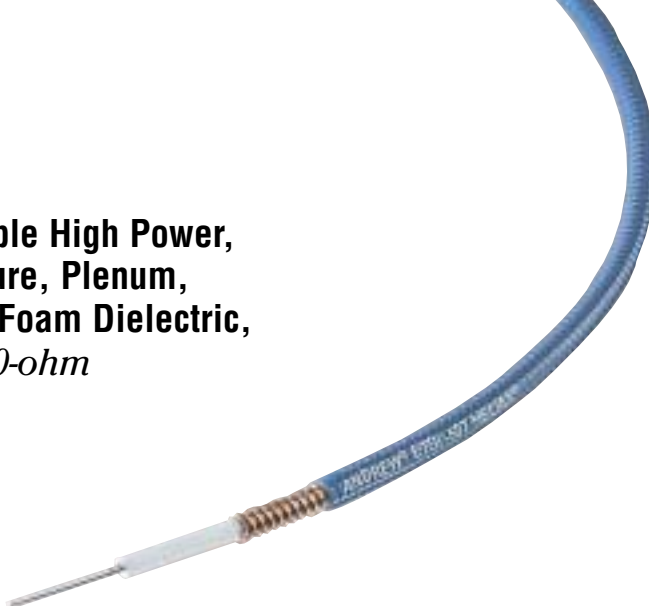

ETS1-50T

Description	Type No.
-------------	----------

Cable Ordering Information

High Power, Plenum Cables	
1/4" Fire Retardant Jacket (CATVP, UL910)	ETS1-50T
1/4" Unjacketed, Fire Retardant (CATVP, UL910)	ETS1-50
Jumper Cable Assemblies – See page 584	

Characteristics

Electrical	
Impedance, ohms	50 ± 2
Maximum Frequency, GHz	20.0
Velocity, percent	82
Peak Power Rating, kW	6.4
dc Resistance, ohms/1000 ft (1000 m)	
Inner	1.9 (6.2)
Outer	2.0 (6.5)
dc Breakdown, volts	1600
Jacket Spark, volts RMS	4000
Capacitance, pF/ft (pf/m)	24.6 (80.6)
Inductance, µH/ft (µH/m)	0.063 (0.205)
Mechanical	
Outer Conductor	Copper
Inner Conductor	Silver plated copper
Diameter over Jacket, in (mm)	0.29 (7.4)
Diameter over Copper Outer Conductor, in (mm)	0.25 (6.4)
Minimum Bending Radius, in (mm)	1 (25)
Number of Bends, minimum (typical)	15 (20)
Bending Moment, lb-ft (N•m)	0.6 (0.8)
Cable Weight, lb/ft (kg/m)	0.066 (0.098)
Tensile Strength, lb (kg)	150 (68)
Flat Plate Crush Strength, lb/in (kg/mm)	100 (1.8)

Attenuation and Average Power Ratings

Frequency MHz	Attenuation dB/100 ft	Attenuation dB/100 m	ETS1-50T ¹ Avg. Power kW	ETS1-50 ² Avg. Power kW
0.5	0.124	0.408	6.40	6.40
1	0.176	0.577	6.40	6.40
1.5	0.216	0.707	6.40	6.40
2	0.249	0.817	6.40	6.40
10	0.56	1.83	6.40	6.40
20	0.79	2.60	6.40	6.40
30	0.97	3.19	5.48	6.13
50	1.26	4.12	4.23	4.73
88	1.67	5.49	3.18	3.55
100	1.79	5.86	2.98	3.33
108	1.86	6.09	2.86	3.20
150	2.20	7.21	2.42	2.71
174	2.37	7.77	2.25	2.51
200	2.54	8.35	2.09	2.34
300	3.13	10.3	1.70	1.90
400	3.63	11.9	1.46	1.64
450	3.86	12.7	1.38	1.54
500	4.08	13.4	1.30	1.46
512	4.13	13.5	1.29	1.44
600	4.48	14.7	1.19	1.33
700	4.86	15.9	1.10	1.22
800	5.21	17.1	1.02	1.14
824	5.29	17.4	1.01	1.12
894	5.52	18.1	0.964	1.08
960	5.73	18.8	0.928	1.04
1000	5.86	19.2	0.909	1.02
1250	6.59	21.6	0.808	0.904
1500	7.25	23.8	0.733	0.82
1700	7.75	25.4	0.686	0.768
1800	7.99	26.2	0.666	0.745
2000	8.46	27.7	0.629	0.704
2100	8.68	28.5	0.613	0.686
2200	8.90	29.2	0.598	0.669
2300	9.12	29.9	0.584	0.653
3000	10.5	34.5	0.506	0.566
3400	11.3	37.0	0.472	0.529
4000	12.3	40.4	0.432	0.484
5000	13.9	45.7	0.382	0.428
6000	15.4	50.6	0.345	0.386
8000	18.1	59.5	0.294	0.329
10000	20.6	67.5	0.259	0.289
12000	22.9	75.0	0.233	0.261
14000	25.0	82.0	0.213	0.238
16000	27.0	88.7	0.197	0.220
18000	29.0	95.1	0.184	0.206
19000	29.9	98.2	0.178	0.199
20000	30.9	101.3	0.173	0.193

Standard Conditions: For Attenuation: VSWR 1.0, ambient temperature 20°C (68°F).

1. For Average Power, Type ETS1-50T (jacketed): VSWR 1.0 ambient temperature 40°C (104°F), inner conductor temperature 200°C (392°F).

2. For Average Power, Type ETS1-50 (unjacketed): VSWR 1.0 ambient temperature 40°C (104°F), inner conductor temperature 250°C (482°F); no solar loading.