


4 Core PTFE Insulated, Silver Plated Copper Screen, PRT Sensor Cable / Wire

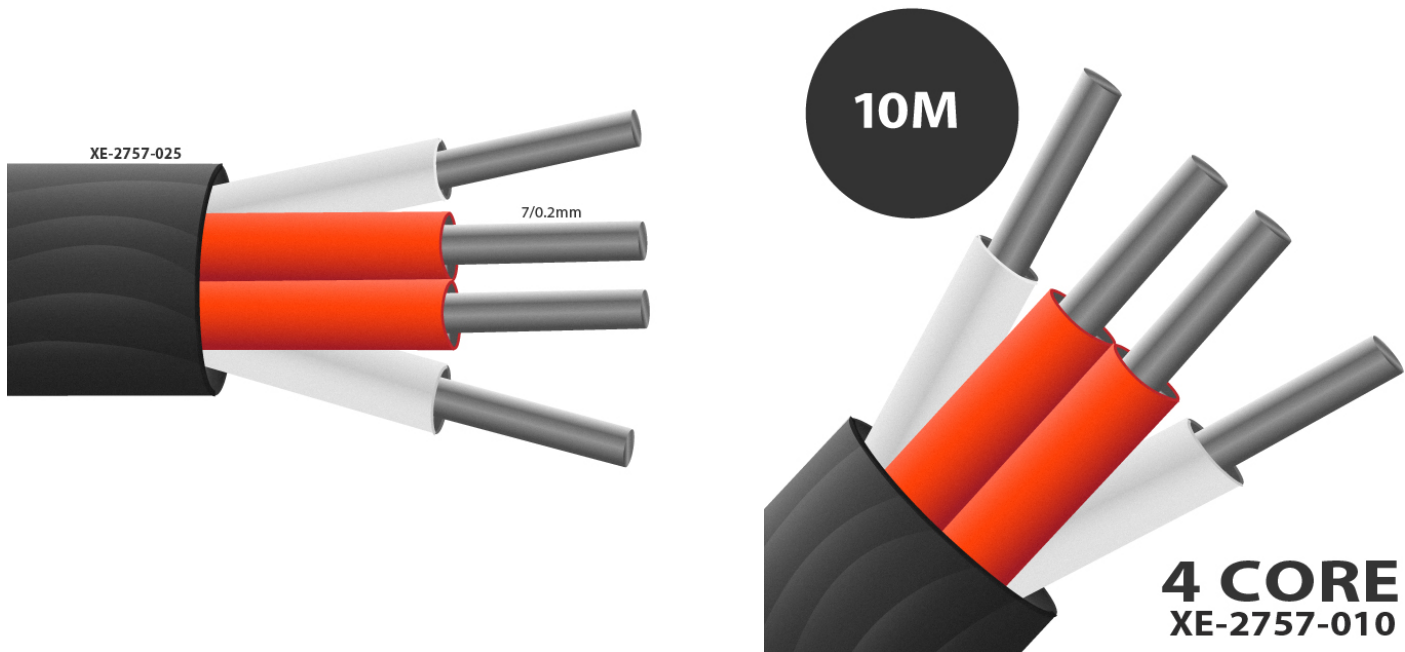

[Click here to view product](#)

Product Code	XE-2757
General Description	4 core PTFE insulated 7/0.2mm silver plated copper conductors, twisted cores, kapton tape, silver plated copper braided screen with PTFE insulated outer jacket
Cable Length	10, 25m
Cable Type	wrapped PTFE tape construction
Core / Strands	7/0.2mm
Insulation Material	Overall black PTFE insulation
Max. Temperature	+260°C
Min. Temperature	-75°C
Number of Wires	4

Standards Met	Cores colour coded 2 x Red / 2 x White to IEC-751 + black outer jacket
---------------	--