


# Deployment Guide-Chart for 2:1 Dual-Wall (adhesive-coated)

## Thin Wall Heatshrink Sleeveings 5mm to 25mm ID

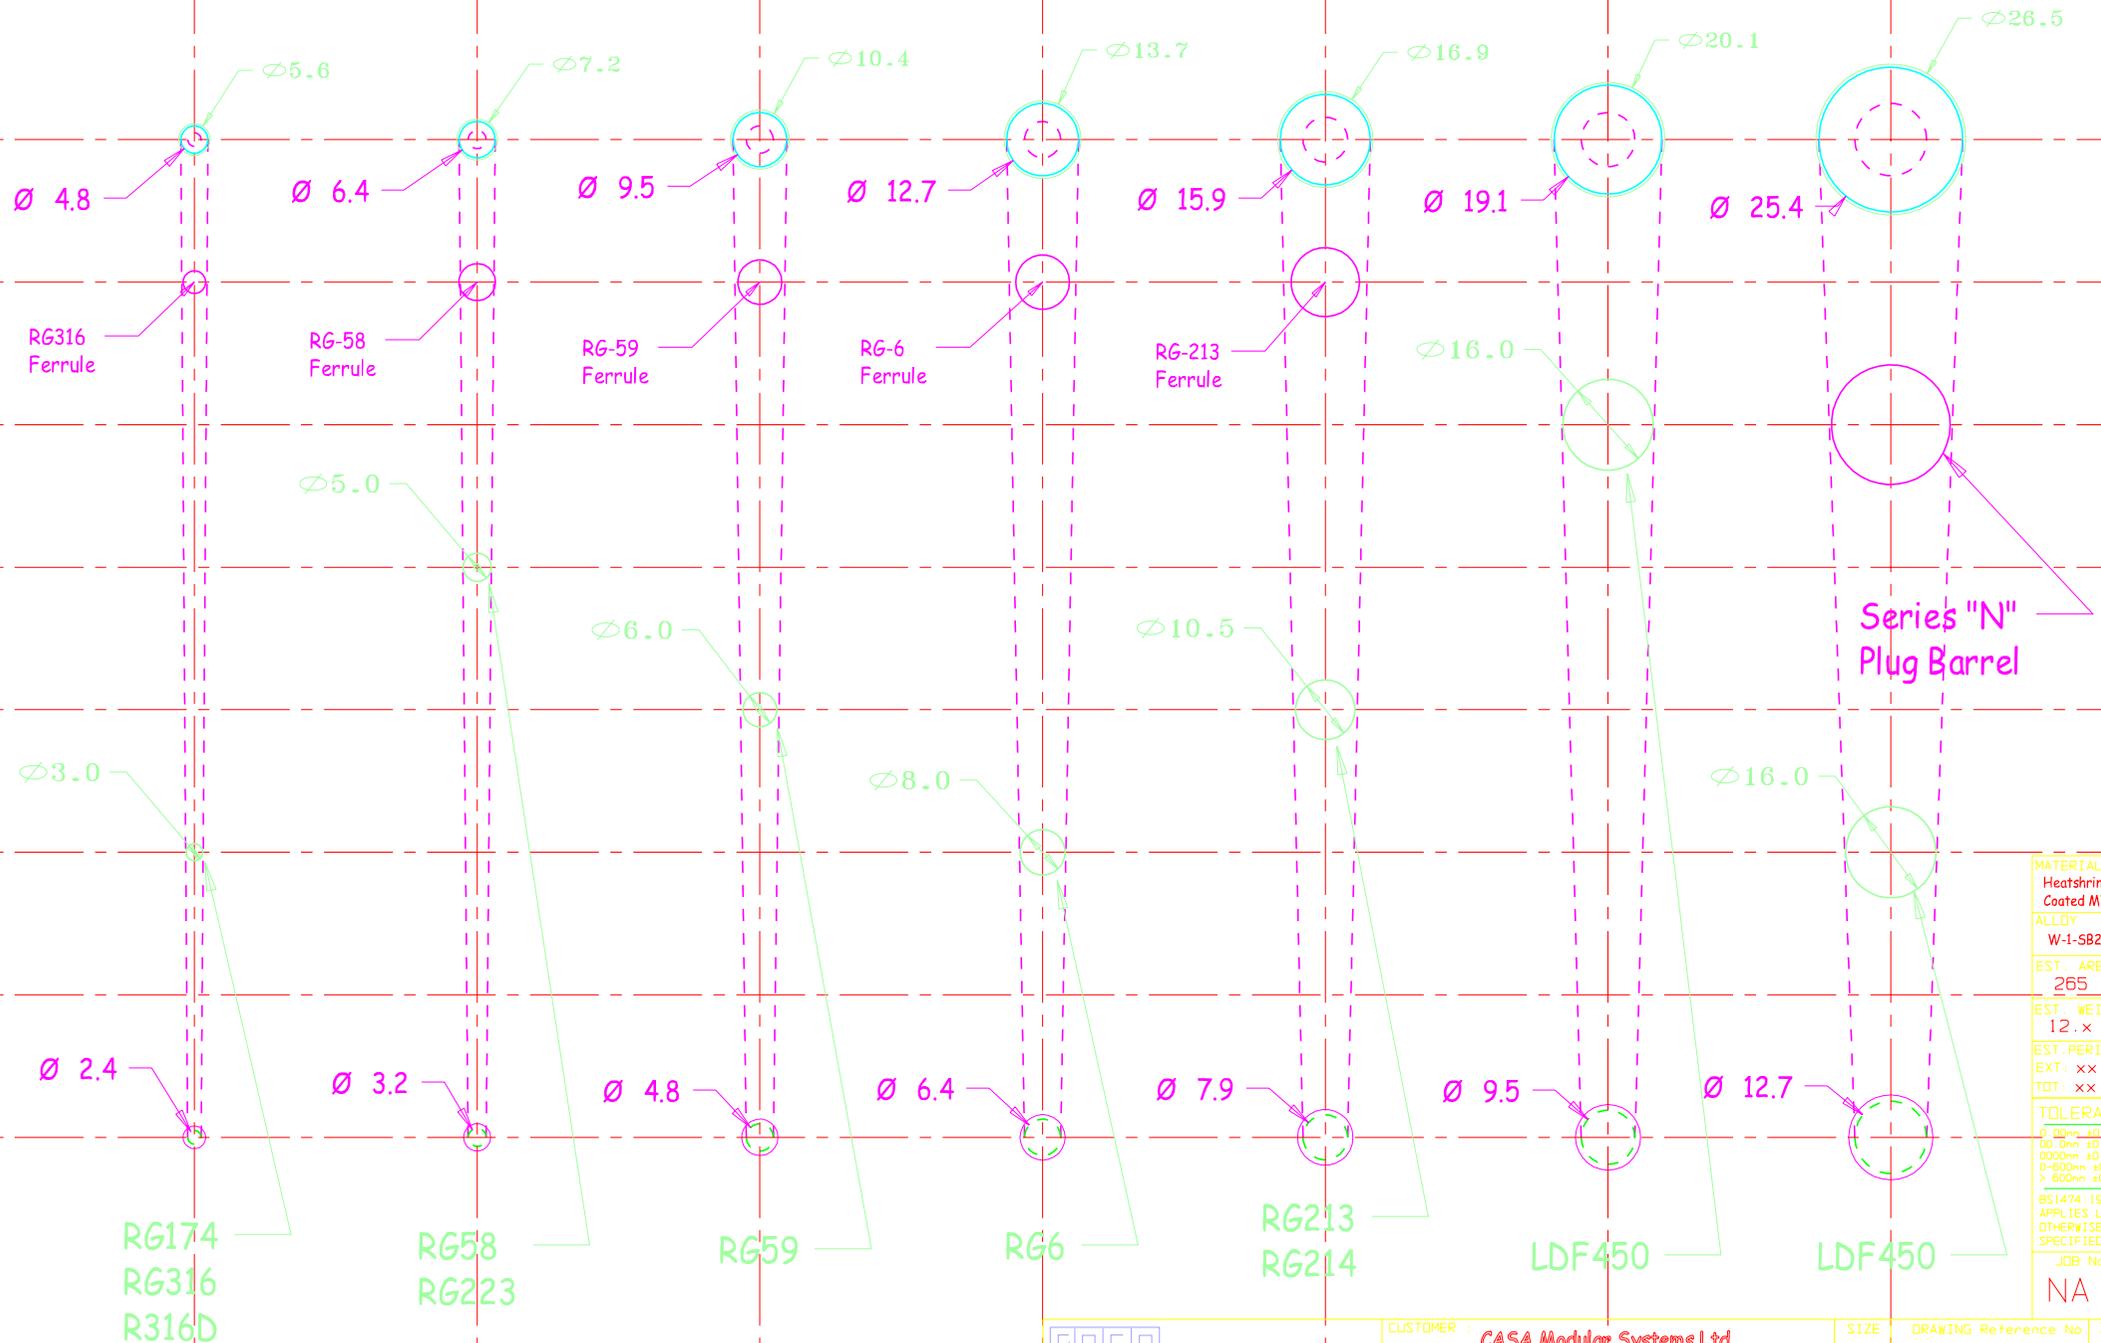

<b>MATERIAL</b>	Heatshrink Coated MW
<b>ALLOY</b>	W-1-SB2X
<b>EST. AREA</b>	265 mm
<b>EST. WEIGHT</b>	12. x kg
<b>EST. PERIPHERY</b>	EXT: xx mm
	TOT: xx mm
<b>TOLERANCE</b>	0-100mm ±0.1mm
	100-250mm ±0.25mm
	250-500mm ±0.5mm
	500-750mm ±0.75mm
	> 750mm ±1.0mm
	APPLIES UNLESS OTHERWISE SPECIFIED
<b>JOB No.</b>	NA

	<b>CUSTOMER :</b> CASA Modular Systems Ltd	<b>SIZE</b>	DRAWING Reference No	<b>ISSUE</b>
	<b>DESCRIPTION :</b> Heatshrink 2:-1 Sleeving Deployment	A3	HS-W1SB2X	A
P.O. BOX 38-828, WELLINGTON, NEW ZEALAND TELEPHONE : (64-4) 5687 277 FACSIMILE : (64-4) 5685 161	<b>DRAWN :</b> A.W.D	<b>DATE :</b> 17/10/09	<b>APPROVED :</b> ?	<b>DWG. SCALE :</b> 1:1
© COPYRIGHT : CASA Modular Systems 1996 ALL RIGHTS RESERVED				