


Deployment Guide-Chart for 3:1 Thin-Dual-Wall (adhesive-coated)
Heatshrink Sleeveings in preferred sizes 3/16" (4.8mm) to 1" (25.4mm) ID

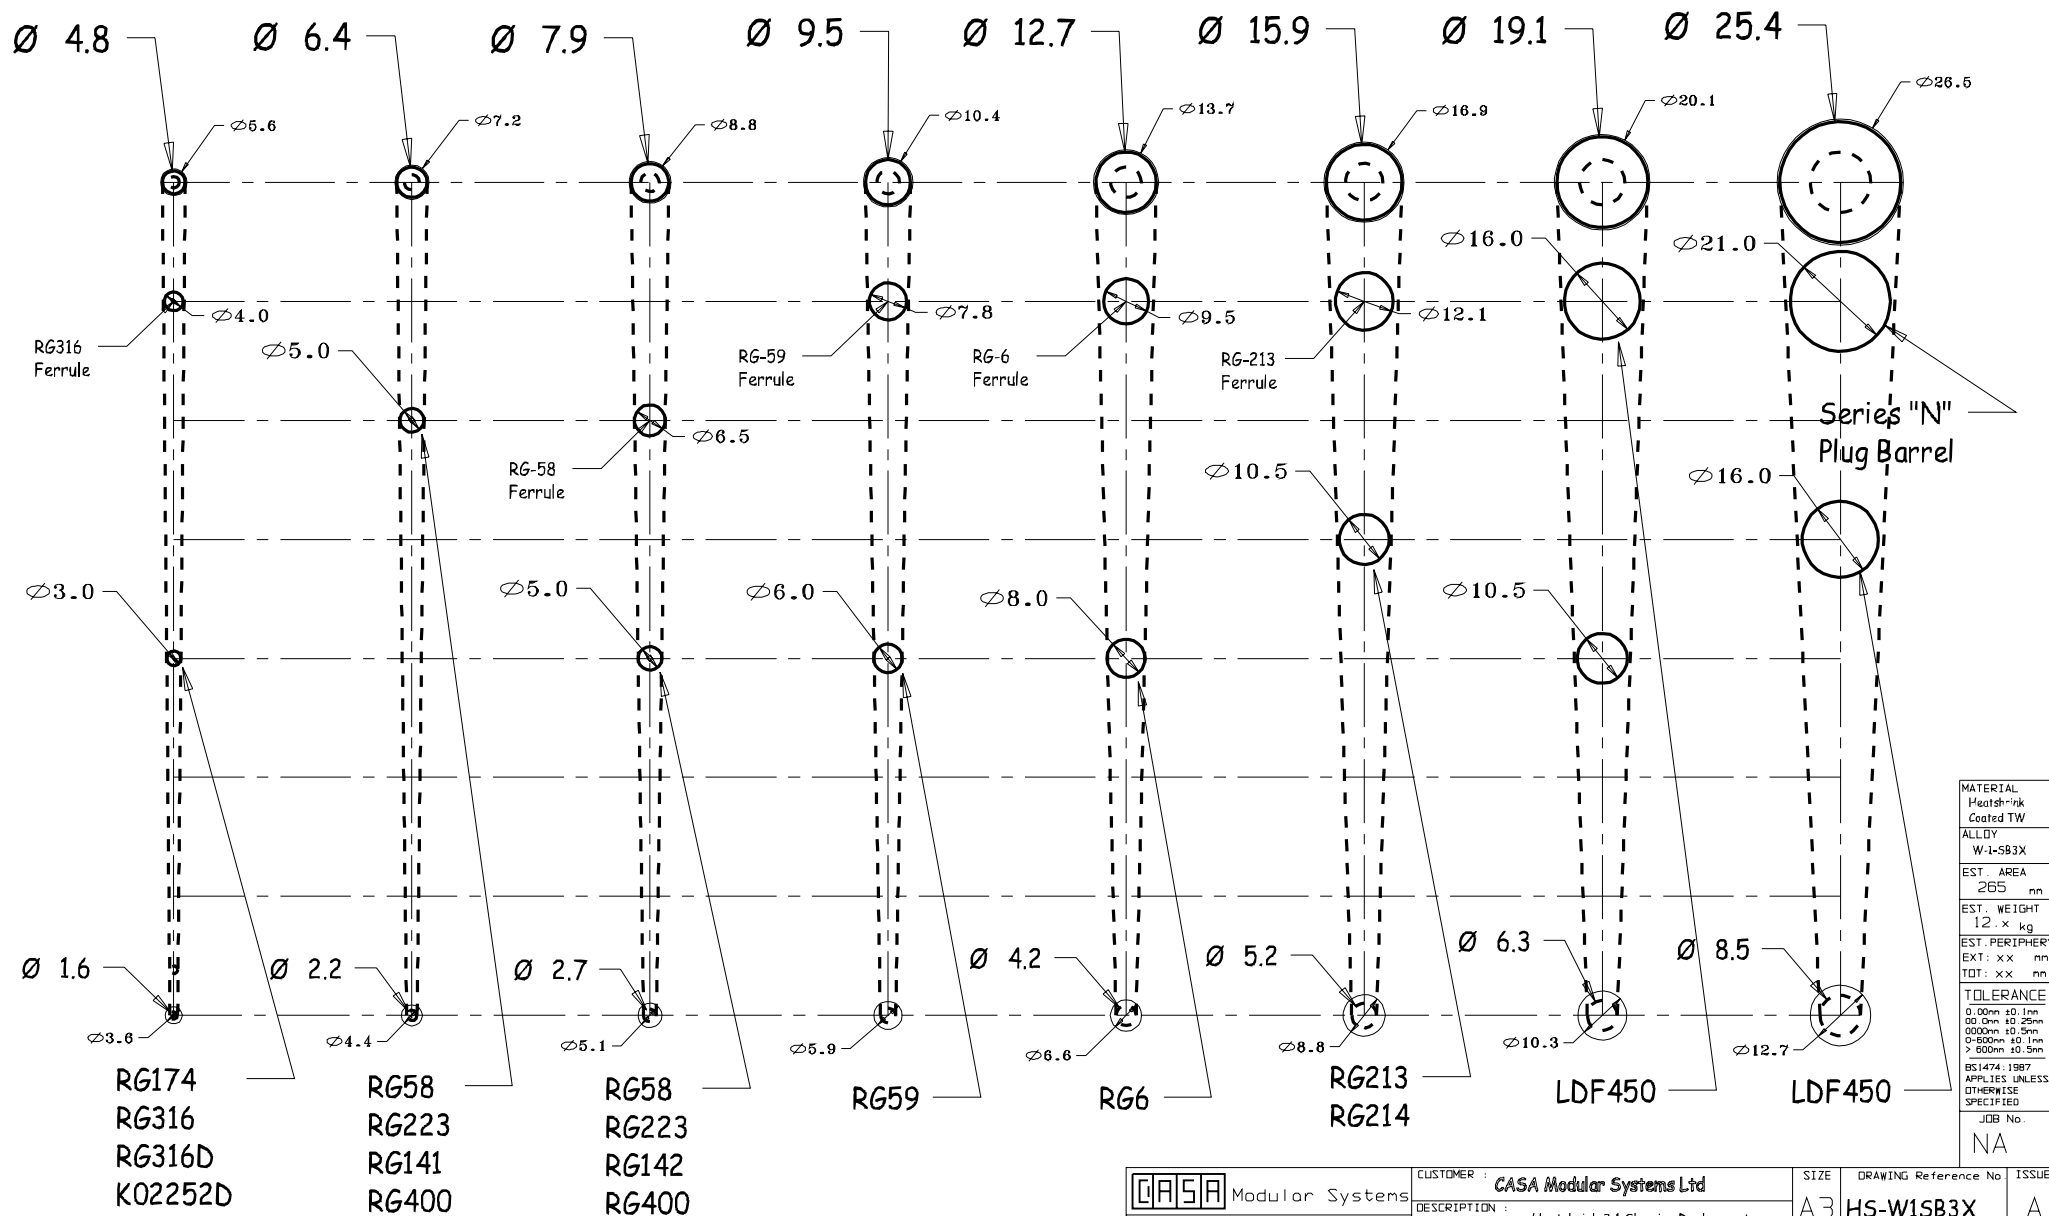

MATERIAL	Heatshrink Coated TW
ALLOY	W-1-SB3X
EST. AREA	265 mm
EST. WEIGHT	12 x kg
EST. PERIPHERY	EXT: xx mm
TOT: xx mm	
TOLERANCE	0.00mm ±0.1mm
	0.00mm ±0.25mm
	0.00mm ±0.5mm
	0.00mm ±1.0mm
	0.00mm ±0.5mm
BS1474:1987	APPLIES UNLESS OTHERWISE SPECIFIED
JOB No.	NA

CASA Modular Systems P.O. BOX 38-928, WELLINGTON, NEW ZEALAND TELEPHONE : (64-4) 5687 277 FACSIMILE : (64-4) 5685 161	CUSTOMER : CASA Modular Systems Ltd		SIZE	DRAWING Reference No.	ISSUE
	DESCRIPTION : Heatshrink 3:1 Sleeve Deployment		A3	HS-W1SB3X	A
DRAWN : A.W.D.	DATE : 18/10/09	APPROVED : ?	DWG. SCALE : 1:1	© COPYRIGHT : CASA Modular Systems 1996 ALL RIGHTS RESERVED	