


Sleeves for Wire and Cable Marking by Size

► 3-TO-1 SHRINK RATIO TWO-SIDED PRINTABLE PERMASLEEVE™ MARKERS



Brady's PermaSleeve markers provide a complete wire marking solution that combines speed, ease of use, and permanence to create long-lasting, high quality identification.

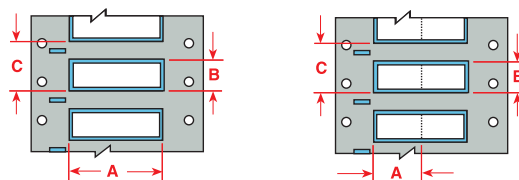

PermaSleeve full-circle markers are available in a 3-to-1 shrink ratio to cover a wider range of wire diameters per sleeve size.

White Polyolefin (B-342) Two-Sided Printable PermaSleeve Markers

Part Number	Markers Per Box	Range of Wire Dia. Inch (mm)		Approx. Wire Gauge**	Marker Width Inch (mm) A	Marker Height Inch (mm) B	Vertical Repeat Inch (mm) C	Recommended Ribbon
2.000" Marker Width								
3PS-094-2-WT	2,500	0.023	(0.58)–(0.080) (2.03)	28-18	2.000 (50.80)	0.182 (4.60)	0.500 (12.70)	R4300
3PS-094-2-WT-S	500	0.023	(0.58)–(0.080) (2.03)	28-18	2.000 (50.80)	0.182 (4.60)	0.500 (12.70)	R4300
3PS-125-2-WT	2,500	0.046	(1.17)–(0.110) (2.79)	22-16	2.000 (50.80)	0.235 (6.00)	0.500 (12.70)	R4300
3PS-125-2-WT-S	500	0.046	(1.17)–(0.110) (2.79)	22-16	2.000 (50.80)	0.235 (6.00)	0.500 (12.70)	R4300
3PS-187-2-WT	2,500	0.062	(1.57)–(0.150) (3.81)	18-12	2.000 (50.80)	0.335 (8.50)	0.625 (16.00)	R4300
3PS-187-2-WT-S	500	0.062	(1.57)–(0.150) (3.81)	18-12	2.000 (50.80)	0.335 (8.50)	0.625 (16.00)	R4300
3PS-250-2-WT	2,500	0.094	(2.39)–(0.215) (5.46)	16-10	2.000 (50.80)	0.439 (11.15)	0.750 (19.05)	R4300
3PS-250-2-WT-S	500	0.094	(2.39)–(0.215) (5.46)	16-10	2.000 (50.80)	0.439 (11.15)	0.750 (19.05)	R4300
3PS-375-2-WT	1,000	0.125	(3.18)–(0.320) (8.13)	12-6	2.000 (50.80)	0.645 (16.40)	1.000 (25.40)	R4300
3PS-375-2-WT-S	250	0.125	(3.18)–(0.320) (8.13)	12-6	2.000 (50.80)	0.645 (16.40)	1.000 (25.40)	R4300
3PS-500-2-WT	500	0.187	(4.75)–(0.450) (11.43)	8-1	2.000 (50.80)	0.851 (21.60)	1.250 (31.75)	R4300
3PS-500-2-WT-S	250	0.187	(4.75)–(0.450) (11.43)	8-1	2.000 (50.80)	0.851 (21.60)	1.250 (31.75)	R4300

**Based on National Electric Code insulation measurement of THHN wire.

Sleeves may be perforated at factory for shorter marker lengths. Depending on overall length, sleeves may be perforated in halves, thirds or fourths. Contact your Brady Identification Solutions Distributor or Customer Service Representative for ordering information.