

Professionally approved products.

Datasheet

RS Unshielded Test Lead Wire 0.75 mm² CSA 500 V Black Silicone Rubber Single Core, 149 Strands 25m

RS Stock number 748-2020



Product Code: Silicone lead wire 0.75mm²

Product Description

Reference Standard

Customer's sample spec.and the general standard

Multi-construction

Single

Cable Construction

Conductor

Cross section

Construction(±0.003mm)

Standard Dia.

Jacket

Thickness

Jacket Dia.(mm)

Color

Marking

No Printing

PACKAGING

25M/ Reel

Suitable Reels/Box

Tinned Copper

0.75mm²

T0.08× 149

1.13

silicone rubber


1.0

3.30±0.15

Red: Black;

Professionally approved products. **Datasheet**

Design

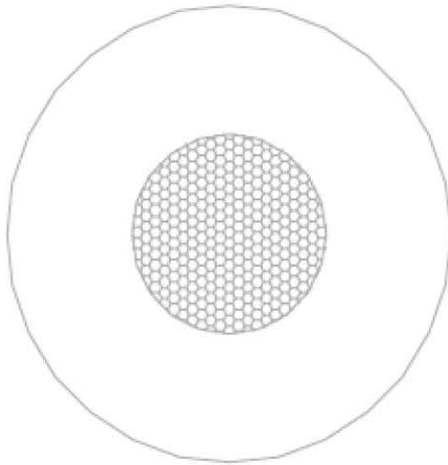

Electrical Characteristics

Max.Conductor DC Resistance at 20 °C (Ω /Km)	24.7
Min.Insulation DC Resistance at 20 °C (M Ω *Km)	>500
Rated Temperature(°C)	-55~+200
Rated Voltage (V)	300/500