

INDEX

VARIABLE CAPACITORS

	Page
Type C.21 V.H.F. Variable Capacitor...	13
Type Dilemin 1 Gang Capacitor ...	14
"Dilecon" Capacitor ...	15
Type O-O Twin Capacitor ...	16
Type 004 Gang Capacitor ...	17
Type O. Gang Capacitor ...	18
Type O.G. 2 Gang Capacitor...	19
Type L Gang Capacitor ...	20
Type P.30 3 Gang Capacitor ...	21
Type P220, P222, P223, P227 Capacitors	22
Type P.20 2 Gang Capacitor ...	23
Type P.503 Capacitor ...	24
Type E. Gang Capacitor ...	25
Type L.E. Gang Capacitor ...	26
V.F.O. Capacitor ...	27
Wavemaster 92 & 87 Variable Capacitors	28
Wavemaster 95 Variable Capacitors	29
Type I.R. Gang Capacitor ...	30
Capacitor Gear Drives ...	31
Type U.101, U.102 and U.103 Split Stator Capacitors ...	32
Type U.101, U.102 and U.103 Capacitors	33
Air Trimmer C.801 Capacitor ...	35
Air Trimmer C.803 Capacitor ...	36
Air Trimmers C.804 and C.809	37
Air Trimmer C804/E ...	38
Air Trimmer C.808 "Split Stator"	39
Differential Trimmer Capacitors	40
Butterfly Trimmer Capacitors	41
P.T.F.E. Trimmer Capacitors	42
(Styles 112, 120)	
P.T.F.E. Trimmer Capacitors	43
(Styles 312, 320, and 330)	
P.T.F.E. Trimmer Capacitor (Style 408)	44
P.T.F.E. Trimmer Capacitor (Style 518)	45
Type C.16 Tetfer Trimmer Capacitor	46
Type C.16 20 pF Tetfer Trimmer	47
8mm Tetfer Trimmer ...	48
8 mm 15pF Tetfer Trimmer ...	49
Miniature Air Dielectric Trimmer C.16	50
Miniature Air Dielectric Trimmer C1604	51
Discon Trimmer	52/53
Type C.11, C.11A, C.11B, C.11C and C.11D Capacitors	56/57
Type C.12 Capacitor (also C.9 and C.10)	58
Split Stator Capacitors (C.9S.S. and C.12S.S.)	59
Type TX5 Transmitting Capacitor	60/61

DRIVE UNITS

	Page
6:1 Ball Drive ...	63
Dual Ratio Ball Drives	64
Adjustable Torque Ball Drive	65
Heavy Duty Epicycle Drive ...	66
Miniature Ball Drive ...	67
10:1 Epicyclic Drive ..	68
Miniature 10:1 Drive Unit ...	69
Miniature 10:1 Flanged Drive Unit ...	70
No. 6/36 Drive...	71
Ball Drive Dial	72
G6 Gear Drive Unit ...	73
G.7 Gear Drive Unit ...	74
G.1 Gear Drive Unit ..	75
G.4 Gear Drive Unit ...	76
Accelerator Spinwheel Drive	77
Spin Wheel Cord Drive and Flywheels	78
Epicyclic Reduction Drives (4111 & 4112)	79
Epicyclic Cord Drive (4113)	80
Type A, Type G and Type H Cord Drives	81
D Type Cord Drive ...	82
D Type 2 Speed Drive Unit and Universal Coupling	83

ACCESSORIES

Universal Couplings ...	85
"Pot Lock" (Spindle Locking Device)	86
Drums 1 $\frac{1}{4}$ "-5 $\frac{1}{2}$ " ...	87
Brass Coupling	88
Extension Spindle	88
S.L.6 Pointer	89
Ball Drive Pointer	89
Eye Bolt...	90
Cord Tension Spring	90
Grommet Bush	90
Grommet Screw	90
$\frac{1}{2}$ " Dia. Pulley and $\frac{3}{8}$ " Dia. Pulley	91
$\frac{1}{2}$ " Dia. Pulley Spacer	91
$\frac{1}{2}$ " Dia. Pulley Pivot	91
Standard Feet	92
Type I.R. Mounting Feet	93


TERMINAL STRIPS

	95
--	----

STAND-OFF INSULATORS

	96/98
--	-------


Law Charts	99
Data Sheets	100

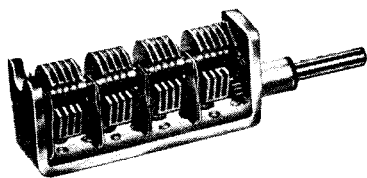


Type C.21 Capacitor for V.H.F. Tuning. 2, 3 and 4 Gang. **Page 13**




Type Dilemin. Solid Dielectric. 1 Gang. **Page 14**




Dilecon. Solid (Phenol) Dielectric. **Page 15**




Type O-O. 2 Gang. Small size for Transistor Radios. **Page 16**




Type O-O. 4 Gang. Small size for transistorised circuits. Integral Gears available. **Page 17**




Type O. 1 or 2 Gang. Small General Purpose or F.M. up to 410 pF. **Page 18**




Type O.G.2. 2 Gang. Small General Purpose with 3-1 Internal Gearing. **Page 19**




Type L. 2 or 3 Gang. General Purpose. **Page 20**




Type P.303. Small size frame offers 2, 3 and 4 Gang with or without Internal Gear. A.M. or F.M. working. **Page 21**




Type P223. AM/FM. Compact Frame size. Various Gear Ratios. **Page 22**




Type P503. AM/FM offers 3 FM Sections with 2 AM. **Page 24**

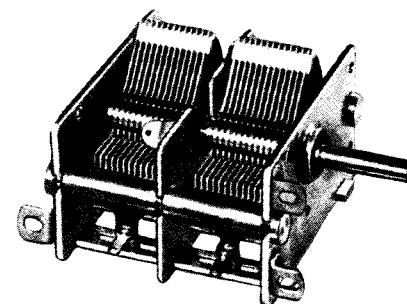


Type E. 1, 2, 3 or 4 Gang. General Purpose. Mid Line. 532 pF. (2-1 Coverage) up to 262 pF S.L.F. **Page 25**

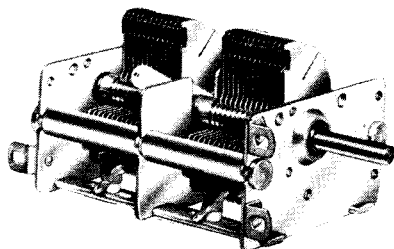


Type L.E. 1, 2, 3 or 4 Gang.
Communications and General
Purpose. **Page 26**

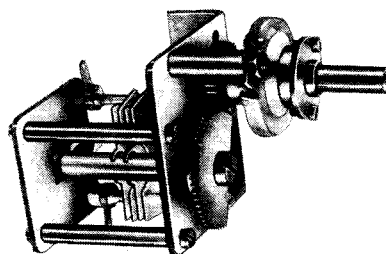


A design specially created for V.F.O.
Tuning. **Page 27**




Wavemaster. Single Section capaci-
tors designed for S.W. working and
for one hole fixing. **Pages 28 & 29**

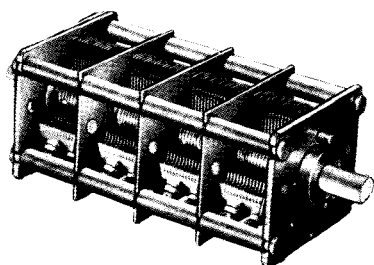


Type I.R. 1, 2, 3 or 4 Gang.
Communications. With Rotors
Insulated. **Page 30**




G2S Gear. 180-330 Gearing 2-1 Ratio.
Available fitted to Types E, L.E.,
L, O, or OO. (Type E. Illustrated.) **Page 31**




G8 P Gear. 8-1 Ratio with Pulley.
Available fitted to Types E, L.E., L,
O, or OO. (Type L. Illustrated.) **Page 31**




G3 S Gear. 3-1 Ratio. Available
fitted to Types E, L.E., L, O, or
OO. (Type O. Illustrated). **Page 31**

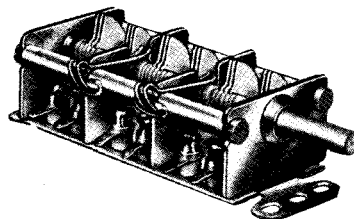

Type U. 1, 2 or 3 Gang.
Split Stator. H.F. and V.H.F.
Small size. **Page 32**




Type U. 1, 2 or 3 Gang. H.F.
and V.H.F. Small Size. **Page 33**




Type C.801. Preset. Small Trimmer.
Type C.802. Trimmer. As above
with 1" x $\frac{1}{4}$ " Spindle.

Page
35




Type C.803. Preset. With Locking
Device.

Page
36




Type C.804. Trimmer. One Hole
Fixing. $\frac{1}{4}$ " Shaft.
Type C.809. With Spindle Seal.

Page
37

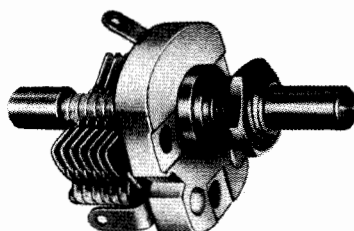


Type C.804E. This range has the rotor
extended at the rear for ganging.

Page
38




Type C.808. Split Stator. Small
Split Stator Trimmer. For H.F. and
V.H.F.

Page
39




Type C.702. Differential. H.F. or
V.H.F. Trimmer.

Page
40



Type C.713. Butterfly Preset H.F.
and V.H.F. With Locking Device.

Page
41

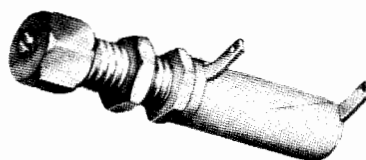

P.T.F.E. Trimmers. High Pre-
cision Piston Type. With Low
Loss Fluorocarbon Dielectric.

Pages
42, 43,
44, 45



Type C.16 Tetfer, Variable Capacitor
Miniature $\frac{3}{8}$ " Square. .50" Maximum
Height.

Page
46



Type C16 20 pF Tetfer. Trimmer Capacitor. $\frac{3}{8}$ " Square Base. P.C. Mounting Tags. **Page 47**



8mm Tetfer. Same performance as type C.16 Tetfer but on smaller base. **Page 48**




8mm 15 pF Tetfer. Trimmer Capacitor. 8mm diameter Base. P.C. Mounting Tags; horizontal as shown or vertical. **Page 49**



Type C.16. Trimmer. $\frac{3}{8}$ " Square. Spindle Slotted Both Ends. **Page 50**




Type C.16. PC Trimmer $\frac{3}{8}$ " Square. Spindle Slotted Both Ends. PC Fixing on .250" or .3 x .4 Module. **Page 50**




Type C.1604. Miniature Trimmer. Same construction as the Type C.16 but provided with $\frac{1}{4}$ " x 40TPI Bush and Lock Nut for single hole mounting. Shaft diameter $\frac{5}{32}$ ". **Page 51**




Ceramic Disc Single Turn Trimmers up to 40pF. Only 2.8mm thick. **Pages 52, 53**

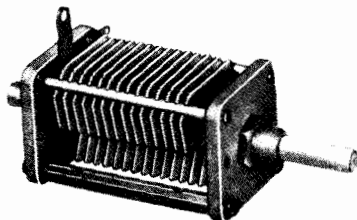


Type C.II. 1 Gang and Split Stator. Various Capacitances up to 572 pF. End Plate $1\frac{5}{16}$ " Square. **Pages 56, 57**



Type C.9. 1 Gang and Split Stator. Capacitances up to 1000 pF. End Plate $2\frac{1}{8}$ " Square. **Page 58**




Type TX.5. Transmitter type variable capacitor having aluminium vanes and ceramic end plates. High working voltages. **Page 60**




Ball Drive. 6-1 Ratio. Coaxial Spindle. Epicyclic Friction Drive.

Page
63




Dual Ratio Ball Drive. 36-1 and 6-1 "Reverse Vernier." On one Coaxial Shaft.

Page
64




Adjustable Torque Ball Drive. High quality reduction drive 6 : 1 ratio. Output torque can be adjusted by customer from 20 to 60 oz. ins. according to individual requirements.

Page
65




Compact Epicyclic Drive for the heavy job. Output Torque 100 oz. ins. 6:1 Ratio.

Page
66



Mini Ball Drive. A miniature reduction drive ideally suited for providing a fine tuning control to any miniature solid dielectric variable capacitor.

Page
67




Powerful 10:1 Reduction Ratio friction drive. Two hole panel mounting. Pointer can be mounted under hex. nut.

Page
68




A truly miniature 10:1 reduction ratio friction drive.

Page
69




No. 6/36 Drive. 36-1 and 6-1 "Reverse Vernier." Complete with Escutcheon and with Spare Scale.

Page
71




Ball Drive Dial, 6-1 Ratio, 4" Dial. Mounts outside the Panel.

Page
72




Compact geared drive. Input to output 8:1. Input to pointer 6:1. Provides greater spread for dial.

Page
73




A compact gear reduction drive. Input and output shafts in line. 8:1 Reduction.

Page
74




Gear Drive Unit. Precision Gearing. No Backlash. Precisely 56.25-1. All Ball Bearing.

Page
75



Accelerator Spinwheel for the extra long scale.

Page
77



Spin Wheel Cord Drive. Ball Bearing. Flywheel Action.

Page
78



Epicyclic Reduction Drive. 5-1 Ratio. One ($\frac{3}{8}$ ") Hole Fixing.

Pages
79 & 80




Cord Drive. Type G.

Page
81




Cord Drive. Type A.

Page
81




Cord Drive. Type H.


Page
81



Cord Drive. Type D. $4\frac{1}{2}$ -1 Reverse
Vernier Reduction. **Page**
82



D Type 2 Speed Drive Unit. Superb
quality continuous reduction drive
with $4\frac{1}{2} : 1$ ratio. **Page**
83



Universal Shaft Coupling. Constant
Velocity. Flexible. Robust. Allows
for both Linear and Angular
Misalignment. **Page**
85



$\frac{3}{4}$ Universal Coupling. Made to same
specification as the larger Coupling
but only $\frac{3}{4}$ " dia. x $\frac{3}{8}$ " long. **Page**
85




Pot Lock. Positive, Precise, Simple
Shaftlock. For use with one hole
($\frac{3}{8}$ ") fixing. **Page**
86




Drums. Numerous Sizes. **Page**
87




Coupling and Extension Spindle.
Solid Brass. **Page**
88

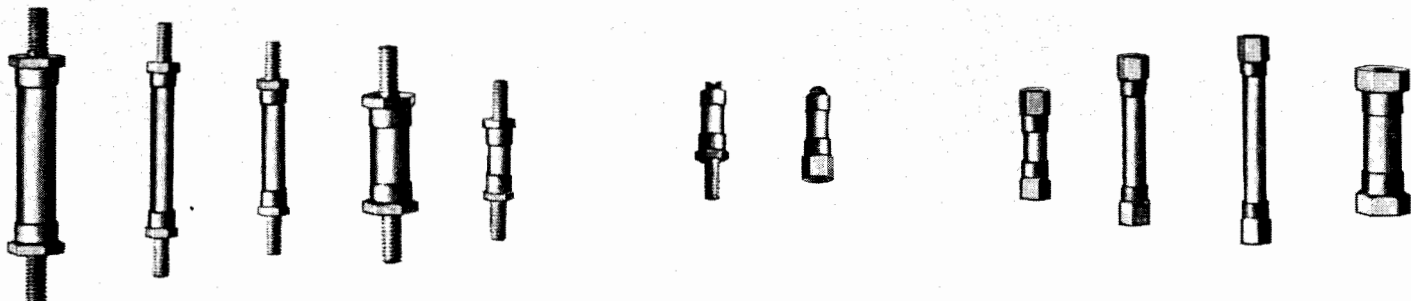

F D-S 6 BR D-S 4 BR B D-S J-S J D D4BR D6BR B-T

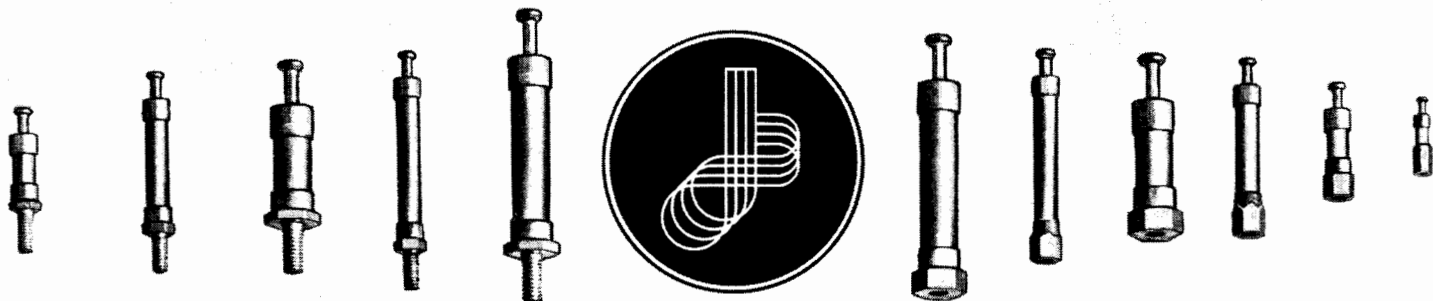

C-S C-S 4 BR A C-S 6 BR E E-T C6BR A-T C4BR C K

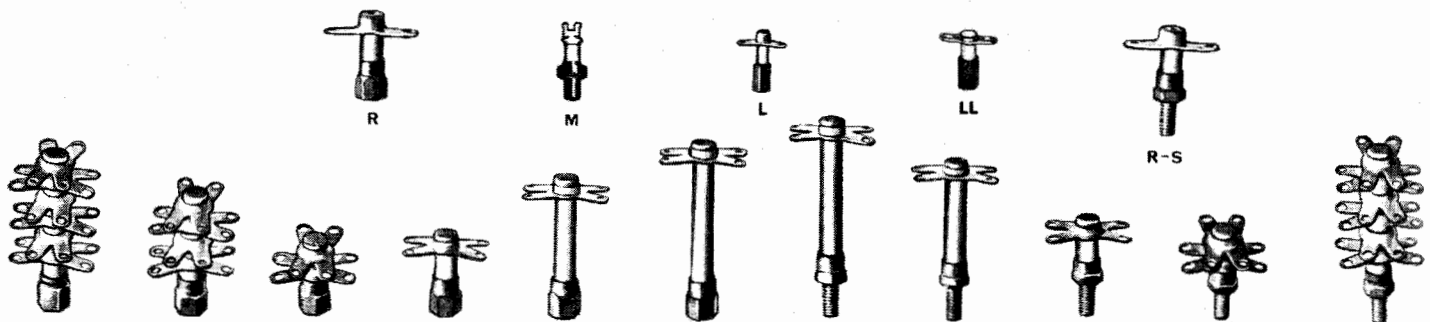

H6BANK H4BANK H2BANK H H4BR H6BR H-S 6 BR H-S 4 BR H-S H-S 2 BANK H-S 6 BANK

T.S. 12

ADUP 10

T.S. 8

ADUP 7

T.S. 6

ADUP 5

T.S. 4

ADUP 3

T.S. 2

