



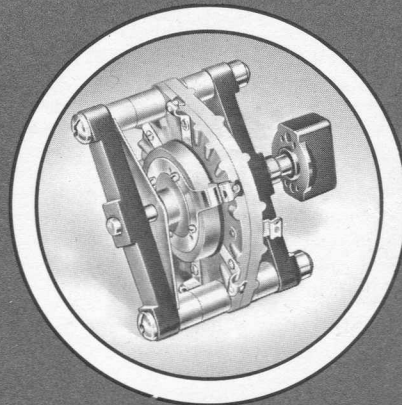

# JAMES MILLEN


MANUFACTURING COMPANY, INC.

*Manufacturers of Grid Dip Meters, Amateur Radio Equipment, Module Oscilloscopes,  
Magnetic Shields, Delay Lines In Addition To Millen Components.*

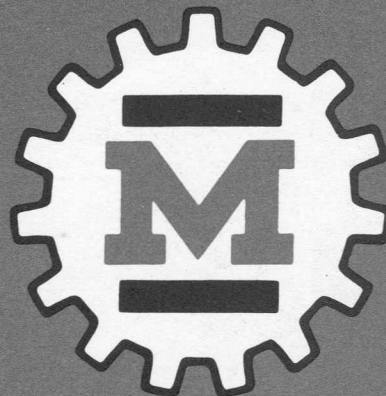

150 EXCHANGE STREET • MALDEN, MASSACHUSETTS, U.S.A.


02148

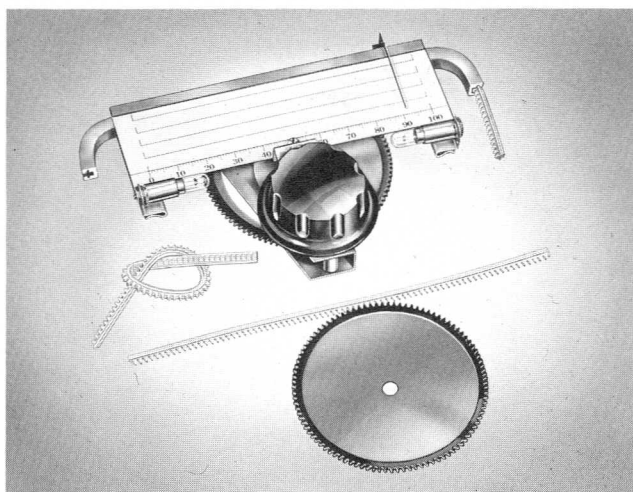


### NO.10037 NO-STRING ILLUMINATED DIAL

Reduction 11:1 Scale Length  $6\frac{1}{2}$ "

The 10037 is a mechanically engineered dial which completely eliminates the annoyances of string-driven pointers, and provides positive pointer travel and resetability. The pointer is driven positively by a flexible rack which cannot slip. The flexible rack rides in an extruded aluminum channel. This girder-like piece provides rigidity. The drive mechanism is a smooth friction drive with  $180^\circ$  rotation of the output shaft. Teflon bearings assure a lifetime of smooth operation.  $5\frac{1}{2}$  turns of the knob results in  $6\frac{1}{2}$ " of pointer travel. The dial has a convenient adjustable zero-set and an anti-parallax pointer. The dial is supplied with a bezel for the front of the panel. Outside dimensions of the bezel are  $7\frac{5}{8}$ " w x  $2\frac{5}{8}$ " h. The behind-the-panel space required is 9" w x  $5\frac{3}{4}$ " h x  $\frac{1}{16}$ " d overall.




10035



10039


**PANEL DIALS** — The No. 10035 illuminated panel dial has 12 to 1 ratio; size,  $8\frac{1}{2}$ " x  $6\frac{1}{2}$ ". Small No. 10039 has 8 to 1 ratio; size, 4" x  $3\frac{1}{4}$ ". Both are of compact mechanical design, easy to mount and have totally self-contained mechanism, thus eliminating back of panel interference. Standard finish, either size, flat black art metal.

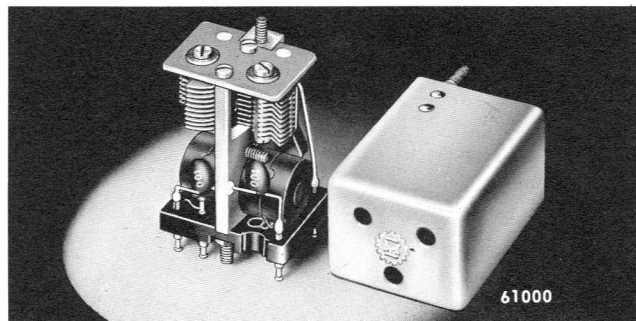

61000


**MINIATURE IF TRANSFORMERS** — Extremely high Q — approximately 200 — Variable Coupling — (under, critical, and over) with all adjustments on top. Small size  $1\frac{1}{16}$ " x  $1\frac{1}{16}$ " x  $1\frac{7}{8}$ ". Molded terminal base. Air capacitor tuned. Coils completely enclosed in cup cores. Tapped primary and secondary. Rugged construction. High electrical stability.

No. 61455, 455 kc. Universal Trans.  
No. 61160, 1600 kc. Universal Trans.

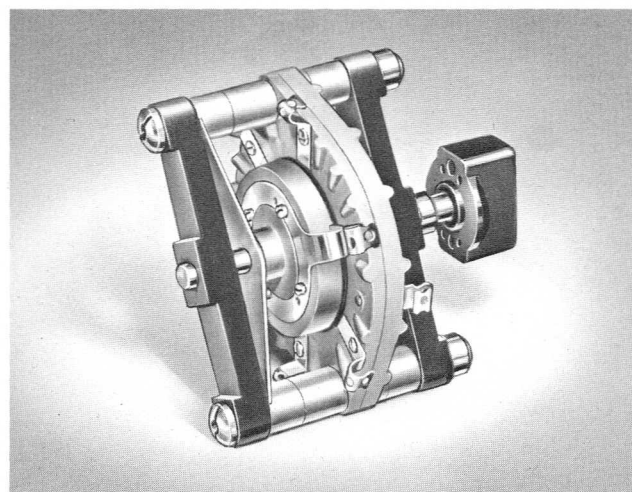

### 51000 HIGH VOLTAGE R-F SWITCHES

- 51001 — Single Wafer — 1 pole, 2 to 6 positions  
13 KV. D.C. Flashover  
20 Amperes
- 51001D — Single Wafer — 2 poles  
2 or 3 positions  
9 KV. D.C. Flashover  
20 Amperes
- 51002 — Double Wafer — 2 poles  
2 to 6 positions  
13 KV. D.C. Flashover  
20 Amperes
- 51002D — Double Wafer — 4 poles  
2 or 3 positions  
9 KV. D.C. Flashover  
20 Amperes

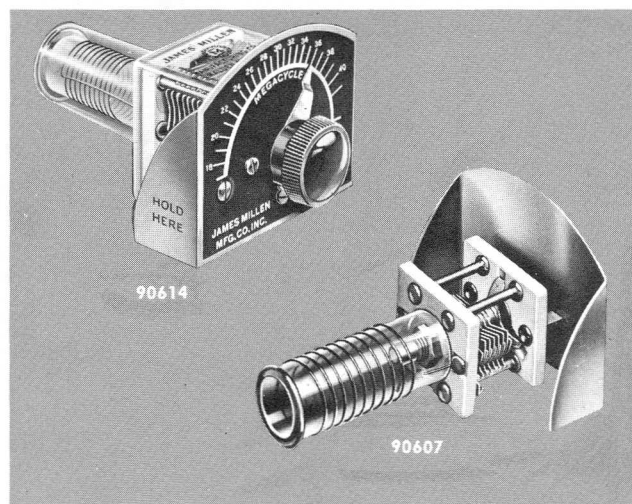

90614

90607

### MIDGET ABSORPTION FREQUENCY METERS

| Code  | Description                             |
|-------|-----------------------------------------|
| 90604 | Range 160 to 210 mc.                    |
| 90606 | Range 9.0 to 23 mc.                     |
| 90607 | Range 23 to 60 mc.                      |
| 90608 | Range 50 to 140 mc.                     |
| 90609 | Range 130 to 170 mc.                    |
| 90610 | Range 105 to 150 mc.                    |
| 90613 | Range 8 to 18.5 mc.                     |
| 90614 | Range 18 to 41 mc.                      |
| 90619 | Range 0.35 to 1.0 mc. — Neon Indicator  |
| 90620 | Range 0.15 to 0.35 mc. — Neon Indicator |
| 90625 | Range 2 to 6 mc. — Neon Indicator       |
| 90626 | Range 5.5 to 15 mc. — Neon Indicator    |







## MILLEN TUBE SOCKETS DESIGNED FOR APPLICATION

Long Flashover path to chassis permits use with transmitting tubes, 866 rectifiers, etc. Long leakage path between contacts. Contacts are type proven by hundreds of millions already in government, commercial and broadcast service, to be extremely dependable. Sockets may be mounted either with or without metal flange. Mounts in standard size chassis hole. All types have barrier between contacts and chassis. All but octal and crystal sockets also have barriers between individual contacts in addition.

Voltage regulator dual contact bayonet socket, 33991 black phenolic insulation and 33992 with low loss mica filled phenolic insulation.

### MILLEN TUBE SOCKETS

| No.   | Description                            | No.   | Description       |
|-------|----------------------------------------|-------|-------------------|
| 33002 | Crystal Socket $\frac{3}{4}$ " x .125" | 33004 | 4 Pin Tube Socket |
| 33102 | Crystal Socket .487" x .095"           | 33005 | 5 Pin Tube Socket |
| 33202 | Crystal Socket $\frac{1}{2}$ " x .125" |       |                   |
| 33302 | Crystal Socket .487" x .050"           | 33008 | 8 Pin Tube Socket |
| 33407 | Miniature Socket only, ceramic         | 33991 | Socket for 991    |
| 33409 | Noval Socket only, ceramic             | 33992 | Socket for 991    |
| 33307 | Miniature Socket, Shield, ceramic      | 33207 | 829 Socket        |
| 33309 | Noval Socket, Shield, ceramic          | 33305 | Acorn Socket      |



**FLEXIBLE COUPLINGS** — The No. 39000 series of MilLEN "Designed for Application" flexible coupling units include, in addition to improved versions of the conventional types, also such exclusive original designs as the No. 39001 insulated universal joint and the No. 39006 "slide-action" coupling (in both steatite and bakelite insulation). The No. 39006 "slide-action" coupling permits longitudinal shaft motion, eccentric shaft motion and out-of-line operation, as well as angular drive.

The No. 39005 and 39005-B (high torque) are similar to the No. 39001, but are not insulated. The steatite insulated No. 39001 has a special anti-backlash pivot and socket grip feature. All of the above illustrated units are for  $\frac{1}{4}$ " shaft and are standard production type units.

The No. 39016 incorporates features which have long been desired in a flexible coupling. No Backlash — High Flexibility — Higher Breakdown Voltage — Smaller Diameter — Shorter Length —

**CERAMIC PLATE OR GRID CAPS** — Soldering lugs and contact one-piece. Lug ears annealed and solder dipped to facilitate "mechanical plus soldered" connection of cable.

No. 36001— $\frac{7}{16}$ " ..... No. 36002— $\frac{3}{8}$ " ..... No. 36004— $\frac{1}{4}$ " .....

**SAFETY TERMINAL** — Combination high voltage terminal and thru-bushing. Tapered contact pin fits firmly into conical socket providing large area, low resistance connection. Pin is swivel mounted in cap to prevent twisting of lead wire.

No. 37001, Black or Red ..... No. 37501, Low loss .....

**STEATITE TERMINAL STRIPS** — Terminal and lug are one piece. Lugs are turret type and are free floating so as not to strain L522 ceramic on wide temperature variations. Easy to mount with series of round holes. 1400 volt and 3500 volt series.









**POSTS, PLATES, AND PLUGS** — The No. 37200 series, including both insulated and non-insulated binding posts with associated plates and plugs, provide various combinations to meet most requirements. The posts have captive heads and keyed mounting. The No. 37291 on No. 37223 are standard in black or red with other colors on special order. No. 37201, No. 37202, and No. 37204 are available in black, red, or low loss. The No. 37202 is also available in steatite.

| No.   | Description                       | No.   | Description                      |
|-------|-----------------------------------|-------|----------------------------------|
| 37201 | Single plates, pr. ....           | 37204 | Double dual plates, pr. ....     |
| 37291 | Single plates (tapered), pr. .... | 37212 | Dual plug .....                  |
|       |                                   | 37222 | Non-insulated binding post ..... |
| 37202 | Dual plates, pr. ....             | 37223 | Insulated binding post .....     |

**DIAL LOCK** — Compact, easy to mount, positive in action, does not alter dial setting in operation! Rotation of knob "A" depresses finger "B" and "C" without imparting any rotary motion to Dial. Single hole mounted.


No. 10050 .....

**TUBE CLAMP** — No. 33087 is easy to use, easy to install, effective in function. Available in special sizes for all types of tubes. Single hole mounting. Spring steel, cadmium plated.






## 34300 SERIES INDUCTORS


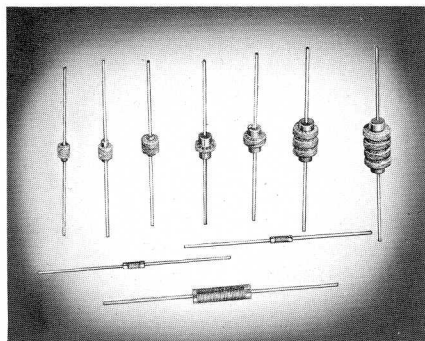


| Part       | Inductance<br>Microhenries | Self<br>Resonant<br>Freq. Mc. | Fig.<br>No. |
|------------|----------------------------|-------------------------------|-------------|
| 34300-0.15 | 0.15 ± 10%                 | 645 MC.                       | 1           |
| 34300-0.22 | 0.22 ± 10%                 | 510                           | 1           |
| 34300-0.33 | 0.33 ± 10%                 | 445                           | 1           |
| 34300-0.47 | 0.47 ± 10%                 | 375                           | 2           |
| 34300-0.5  | 0.5 ± 10%                  | 350                           | 2           |
| 34300-0.68 | 0.68 ± 10%                 | 300                           | 2           |
| 34300-0.82 | 0.82 ± 10%                 | 265                           | 2           |
| 34300-1    | 1 ± 10%                    | 175                           | 4           |
| 34300-1.1  | 1.1 ± 10%                  | 210                           | 4           |
| 34300-1.2  | 1.2 ± 10%                  | 210                           | 3           |
| 34300-1.5  | 1.5 ± 5%                   | 190                           | 3           |
| 34300-1.8  | 1.8 ± 5%                   | 171                           | 3           |
| 34300-2.2  | 2.2 ± 5%                   | 160                           | 3           |
| 34300-2.5  | 2.5 ± 5%                   | 140                           | 3           |
| 34300-2.7  | 2.7 ± 5%                   | 142                           | 3           |
| 34300-3    | 3 ± 5%                     | 132                           | 3           |
| 34300-3.3  | 3.3 ± 5%                   | 120                           | 3           |
| 34300-3.9  | 3.9 ± 5%                   | 118                           | 3           |
| 34300-4.7  | 4.7 ± 5%                   | 105                           | 3           |
| 34300-5    | 5 ± 5%                     | 85                            | 3           |
| 34300-5.6  | 5.6 ± 5%                   | 98                            | 3           |
| 34300-6.2  | 6.2 ± 5%                   | 90                            | 7           |
| 34300-6.8  | 6.8 ± 5%                   | 90                            | 3           |
| 34300-8.2  | 8.2 ± 5%                   | 81                            | 3           |
| 34300-10   | 10 ± 5%                    | 65                            | 7           |

| Catalog<br>Number | Inductance<br>Microhenries | Self<br>Resonant<br>Freq. Mc. | Fig.<br>No. |
|-------------------|----------------------------|-------------------------------|-------------|
| 34300-12          | 12 ± 5%                    | 65                            | 3           |
| 34300-15          | 15 ± 5%                    | 22                            | 8           |
| 34300-18          | 18 ± 5%                    | 22                            | 8           |
| 34300-20          | 20 ± 5%                    | 27                            | 8           |
| 34300-22          | 22 ± 5%                    | 46                            | 9           |
| 34300-24          | 24 ± 5%                    | 24                            | 8           |
| 34300-25          | 25 ± 5%                    | 26                            | 8           |
| 34300-27          | 27 ± 5%                    | 23                            | 8           |
| 34300-30          | 30 ± 5%                    | 15                            | 8           |
| 34300-33          | 33 ± 5%                    | 36                            | 9           |
| 34300-36          | 36 ± 5%                    | 35                            | 9           |
| 34300-39          | 39 ± 5%                    | 18                            | 8           |
| 34300-47          | 47 ± 5%                    | 18                            | 8           |
| 34300-50          | 50 ± 5%                    | 18                            | 8           |
| 34300-56          | 56 ± 5%                    | 28                            | 9           |
| 34300-68          | 68 ± 5%                    | 26                            | 9           |
| 34300-75          | 75 ± 5%                    | 12                            | 8           |
| 34300-100         | 100 ± 5%                   | 13                            | 8           |
| 34300-120         | 120 ± 5%                   | 12                            | 8           |
| 34300-150         | 150 ± 5%                   | 11                            | 8           |
| 34300-180         | 180 ± 5%                   | 9.8                           | 8           |
| 34300-200         | 200 ± 5%                   | 7.5                           | 8           |
| 34300-220         | 220 ± 5%                   | 12                            | 11          |
| 34300-250         | 250 ± 5%                   | 6.8                           | 8           |
| 34300-270         | 270 ± 5%                   | 11.9                          | 11          |
| 34300-300         | 300 ± 5%                   | 6                             | 8           |
| 34300-330         | 330 ± 5%                   | 8.5                           | 17          |
| 34300-350         | 350 ± 5%                   | 8                             | 12          |
| 34300-470         | 470 ± 5%                   | 7.6                           | 13          |
| 34300-500         | 500 ± 5%                   | 7.5                           | 13          |
| 34300-750         | 750 ± 5%                   | 5.8                           | 14          |
| 34300-820         | 820 ± 5%                   | 5.7                           | 13          |
| 34300-1000        | 1000 ± 5%                  | 4                             | 12          |
| 34300-1200        | 1200 ± 5%                  | 4.8                           | 15          |
| 34300-1800        | 1800 ± 5%                  | 2.6                           | 16          |
| 34300-2200        | 2200 ± 5%                  | 2.8                           | 18          |
| 34300-2500        | 2500 ± 5%                  | 2.7                           | 18          |
| 34300-10000       | 10000 ± 5%                 | 1.5                           | 18          |

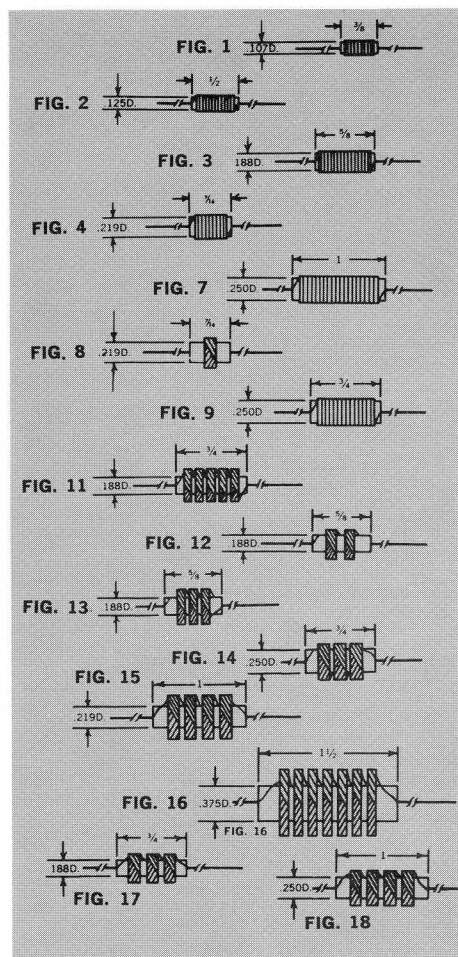


## TRANSMITTING R-F CHOKES

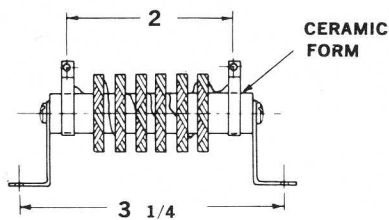


No. 34140 No. 34156 No. 34152 No. 34154

|                 |      |      |      |      |              |
|-----------------|------|------|------|------|--------------|
| INDUCTANCE:     | 1.4  | 2.5  | 4.0  | 1.0  | millihenries |
| RESISTANCE:     | 6.25 | 10.6 | 13.5 | 5.5  | ohms         |
| DC CURRENT:     | 500  | 500  | 500  | 600  | milliamperes |
| VOLTAGE RATING: | 4500 | 4500 | 8000 | 8000 | VDC          |

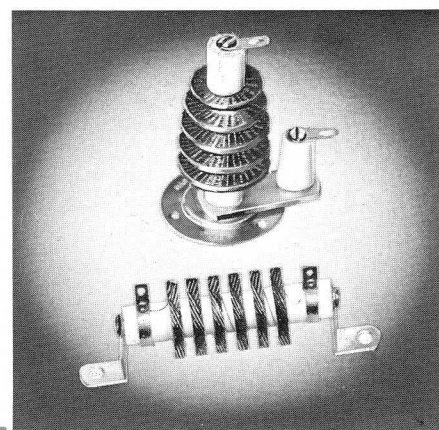


## 34100 SERIES R-F CHOKE COILS

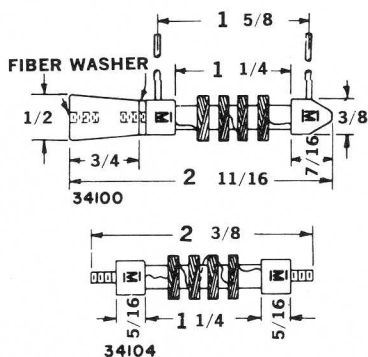

Ceramic forms and insulators. Leads: #18 tinned solid wire, 2 1/8" long. Mounting screws, 6-32 threaded x 1/4" long.

| Catalog<br>Number | Inductance<br>Millihenries | Maximum<br>Current |
|-------------------|----------------------------|--------------------|
| 34100             | 2.5                        | 250 MA.            |
| 34101             | 2.5                        | 250 MA.            |
| 34102             | 2.5                        | 250 MA.            |
| 34103             | 2.5                        | 250 MA.            |
| 34104             | 2.5                        | 250 MA.            |
| 34105             | 1.0                        | 300 MA.            |
| 34106             | 1.0                        | 300 MA.            |
| 34107             | 1.0                        | 300 MA.            |
| 34108             | 1.0                        | 300 MA.            |
| 34109             | 1.0                        | 300 MA.            |

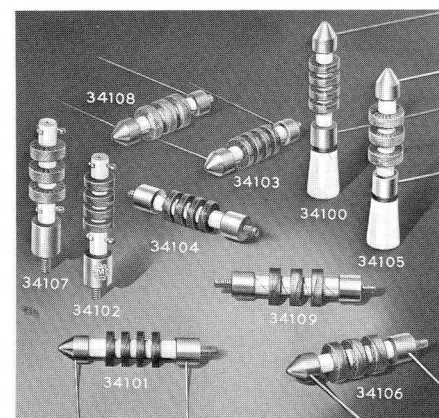



## AIR WOUND TRANSMITTING INDUCTORS

### 42000 SERIES — 500 WATT COILS

| Catalog Number | Inductance Micro-henries | Frequency MC. | Type Link | Link Placement | Coil Length Inches | Coil O. D. Inches | Number of Turns | A. W. G. Wire Size |
|----------------|--------------------------|---------------|-----------|----------------|--------------------|-------------------|-----------------|--------------------|
| 42010          | 1.2                      | 28            | Variable  | Center         | 4-1/4              | 2-1/8             | 6               | 6                  |
| 42015          | 1.3                      | 21            | Variable  | Center         | 4-1/4              | 2-1/8             | 6               | 6                  |
| 42020          | 5.0                      | 14            | Variable  | Center         | 2-7/8              | 2-9/16            | 10              | 12                 |
| 42040          | 17.4                     | 7             | Variable  | Center         | 4-1/4              | 2-9/16            | 22              | 12                 |
| 42080          | 51.1                     | 3.5           | Variable  | Center         | 4-21/32            | 2-9/16            | 40              | 16                 |
| 42160          | 84.5                     | 1.8           | Variable  | Center         | 4-11/16            | 2-5/8             | 54              | 16                 |

### 43000 SERIES — 120 WATT COILS

|       |      |     |       |        |         |         |    |    |
|-------|------|-----|-------|--------|---------|---------|----|----|
| 43011 | 0.75 | 28  | Fixed | Center | 1       | 1-1/2   | 4  | 16 |
| 43012 | 0.75 | 28  | Fixed | End    | 1       | 1-1/2   | 4  | 16 |
| 43015 | 1.35 | 21  | Fixed | Center | 1-3/16  | 1-1/2   | 6  | 16 |
| 43021 | 2.1  | 14  | Fixed | Center | 1-1/2   | 1-1/2   | 8  | 16 |
| 43022 | 2.5  | 14  | Fixed | End    | 1-1/2   | 1-1/2   | 9  | 16 |
| 43041 | 11   | 7   | Fixed | Center | 2       | 1-1/2   | 22 | 16 |
| 43042 | 11   | 7   | Fixed | End    | 2       | 1-1/2   | 22 | 16 |
| 43081 | 32   | 3.5 | Fixed | Center | 2       | 1-1/2   | 38 | 20 |
| 43082 | 36.2 | 3.5 | Fixed | End    | 2       | 1-1/2   | 40 | 20 |
| 43115 | 1.9  | 21  | Fixed | End    | 1-1/8   | 1-1/2   | 7  | 16 |
| 43161 | 122  | 1.8 | Fixed | Center | 2-15/16 | 1-13/16 | 76 | 22 |
| 43162 | 57   | 1.8 | Fixed | End    | 1-7/8   | 1-1/2   | 51 | 22 |

### 44000 SERIES — 150 WATT COILS


|       |      |     |          |        |         |         |    |          |
|-------|------|-----|----------|--------|---------|---------|----|----------|
| 44005 | 0.81 | 50  | Variable | Center | 1-3/4   | 1-25/32 | 4  | 1/8 tube |
| 44010 | 1.3  | 28  | Variable | Center | 2-1/8   | 1-13/16 | 6  | 1/8 tube |
| 44015 | 2.4  | 21  | Variable | Center | 2-1/8   | 2-5/8   | 6  | 12       |
| 44020 | 5.4  | 14  | Variable | Center | 1-3/8   | 2-5/8   | 10 | 14       |
| 44040 | 15   | 7   | Variable | Center | 2-5/8   | 2-5/8   | 18 | 14       |
| 44080 | 49.4 | 3.5 | Variable | Center | 2-3/4   | 2-5/8   | 32 | 16       |
| 44160 | 54   | 1.8 | Variable | Center | 2-13/16 | 2-5/8   | 36 | 18       |

### 48000 SERIES — 120 WATT VHF COILS

|       |       |     |          |        |        |        |    |              |
|-------|-------|-----|----------|--------|--------|--------|----|--------------|
| 48002 | 0.083 | 144 | Fixed    | Center | 2      | 1/2    | 2  | 5/16" ribbon |
| 48006 | 0.68  | 50  | Fixed    | Center | 3/4    | 7/8    | 6  | 14           |
| 48011 | 2.6   | 28  | Fixed    | Center | 7/8    | 27/32  | 12 | 16           |
| 48015 | 4.9   | 21  | Fixed    | Center | 1-3/8  | 1-1/32 | 17 | 16           |
| 48021 | 15.4  | 14  | Fixed    | Center | 1-9/16 | 1-1/32 | 26 | 16           |
| 48102 | 0.119 | 144 | Variable | Center | 1-1/16 | 1-3/32 | 2  | 1/8 tube     |
| 48106 | 1.35  | 50  | Variable | Center | 2-3/4  | 1-1/16 | 12 | 1/8 tube     |
| 48111 | 3.75  | 28  | Variable | Center | 2-1/4  | 7/8    | 22 | 16           |
| 48115 | 7.9   | 21  | Variable | Center | 2-5/8  | 1-1/16 | 26 | 16           |
| 48121 | 15.0  | 14  | Variable | Center | 2-7/16 | 1-1/16 | 38 | 18           |


#### No. 40205 — 5-PRONG COIL PLUG

Ceramic base. Pins brass nickel plated. 2500 VDC rating. Midget size. Fits 41205 socket.




#### No. 41205 — 5-JACK COIL SOCKET

Ceramic base. Lugs phosphor bronze silver plated. 2500 VDC rating. Midget size. Fits 40205 plug.







#### No. 40305 — 5-PRONG COIL PLUG


Molded base. Pins brass nickel plated. 4200 VDC rating. Intermediate size. Fits 41305 socket.

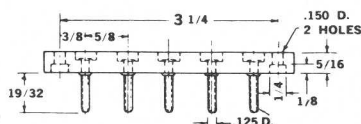


#### No. 41305 — 5-JACK COIL SOCKET

Ceramic base. Lugs phosphor bronze silver plated. 4200 VDC rating. Intermediate size. Fits 40305 plug.

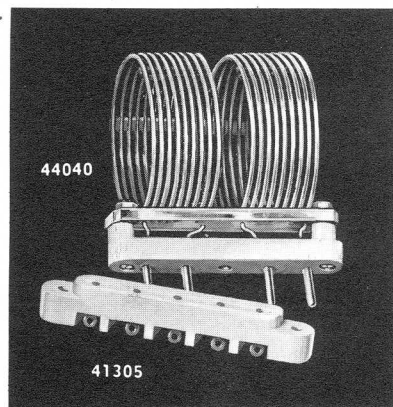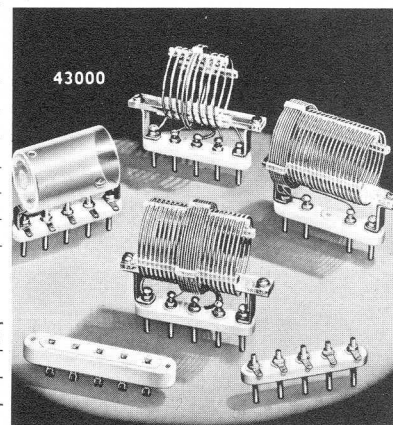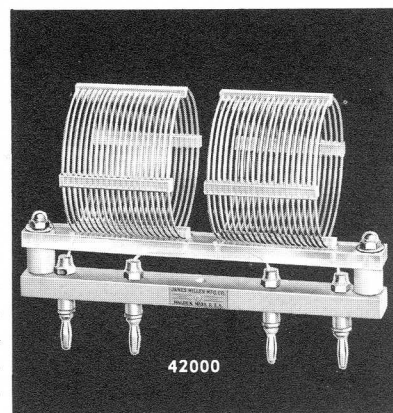


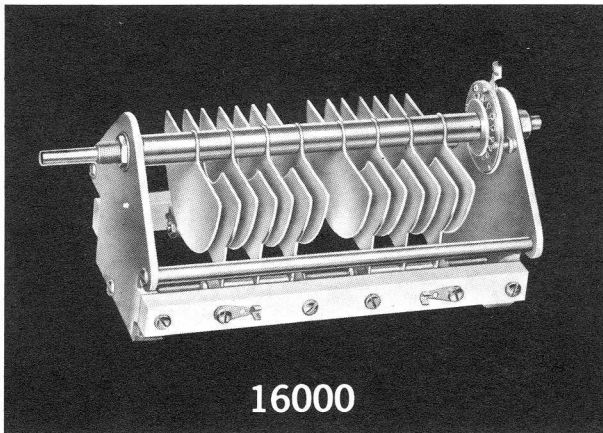


16000

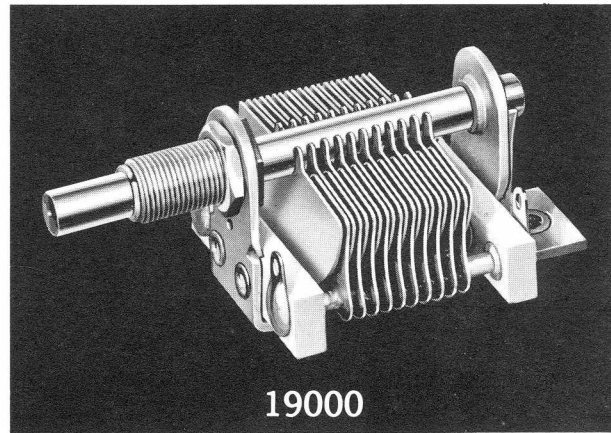

19000

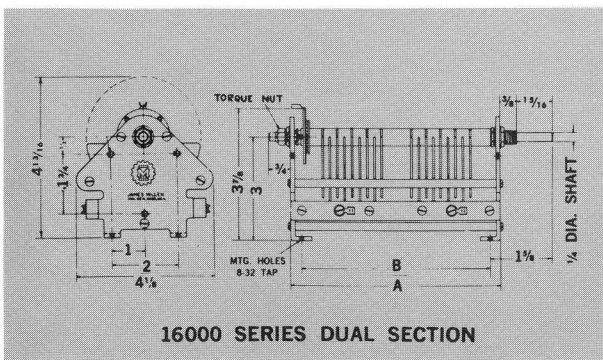

16000 SERIES DUAL SECTION

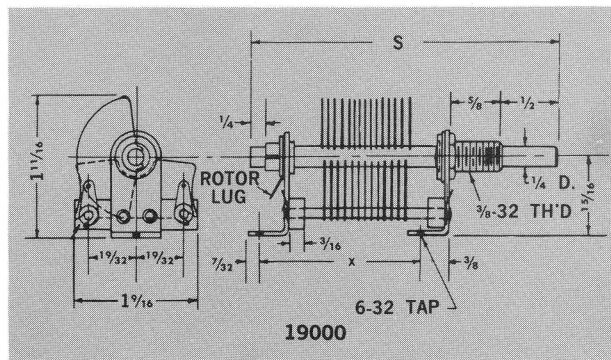

19000

## 16000 SERIES TRANSMITTING CAPACITORS

**FEATURES:** The 16000 Series has sturdy construction, thick, round-edged, polished aluminum plates with  $1\frac{3}{4}$ " radius. Also has constant impedance, heavy current, multiple finger rotor contactor of unique design. Available in single and double sections and many capacities and plate spacings. Other features: aluminum frame, Grade L423 ceramic bars, brass hardware, nickel-plating.

### SINGLE SECTION — 0.171" AIR GAP — 6000 V. PEAK

| Millen Cat. No. | Capacity MMF | Dimension "A" "B"  |                    | Plates Per Sec. |
|-----------------|--------------|--------------------|--------------------|-----------------|
| 16550           | 13. - 52     | 3 $\frac{3}{8}$ "  | 2 $\frac{3}{4}$ "  | 5R- 4S          |
| 16510           | 17. -101     | 6 $\frac{1}{4}$ "  | 5 $\frac{5}{8}$ "  | 9R- 8S          |
| 16520           | 37. -203     | 9 $\frac{1}{2}$ "  | 8 $\frac{7}{8}$ "  | 18R-16S         |
| 16530           | 45. -297     | 12 $\frac{1}{2}$ " | 11 $\frac{7}{8}$ " | 25R-24S         |

### SINGLE SECTION — 0.265" AIR GAP — 9000 V. PEAK

|       |          |                    |                    |         |
|-------|----------|--------------------|--------------------|---------|
| 16559 | 11. - 65 | 6 $\frac{1}{4}$ "  | 5 $\frac{5}{8}$ "  | 8R- 7S  |
| 16512 | 40. -128 | 11 $\frac{1}{2}$ " | 10 $\frac{7}{8}$ " | 16R-14S |

### DOUBLE SECTION — 0.077" AIR GAP — 3000 V. PEAK

|       |          |                   |                   |         |
|-------|----------|-------------------|-------------------|---------|
| 16200 | 15. -195 | 6 $\frac{1}{4}$ " | 5 $\frac{5}{8}$ " | 8R- 8S  |
| 16250 | 20. -255 | 9 $\frac{1}{2}$ " | 8 $\frac{7}{8}$ " | 10R-10S |

### DOUBLE SECTION — 0.171" AIR GAP — 6000 V. PEAK

|       |          |                   |                   |        |
|-------|----------|-------------------|-------------------|--------|
| 16030 | 8.5- 27  | 4 $\frac{1}{4}$ " | 3 $\frac{5}{8}$ " | 3R- 2S |
| 16050 | 12. - 51 | 6 $\frac{1}{4}$ " | 5 $\frac{5}{8}$ " | 5R- 4S |
| 16100 | 19. -101 | 9 $\frac{1}{2}$ " | 8 $\frac{7}{8}$ " | 9R- 8S |

### DOUBLE SECTION — 0.265" AIR GAP — 9000 V. PEAK

|       |          |                    |                    |        |
|-------|----------|--------------------|--------------------|--------|
| 16029 | 11. - 29 | 6 $\frac{1}{4}$ "  | 5 $\frac{5}{8}$ "  | 4R- 3S |
| 16059 | 20. - 64 | 11 $\frac{1}{2}$ " | 10 $\frac{7}{8}$ " | 8R- 7S |

## 19000 SERIES TUNING CAPACITORS

**FEATURES:** The 19000 Series is a versatile single section tuning capacitor to meet special requirements available below. Threaded brass front bearing and tapped end brackets permit panel or base mounting. This series has Grade L423 ceramic insulators, soldered brass rotors and stators; rotor shaft supported on bearings at both front and rear of capacitor. Brass plates are nickel-plated.





**MODEL SPECIFICATIONS:** Straight line capacity characteristic. Single spaced types have 0.022" air gap — 850 V. peak. The 19000 Series may be supplied with wide air gaps. Specify type number followed by the designation of W or Y. Air gap: (W) 0.040" — 1350 V. peak; (Y) 0.066" — 2250 V. peak.

### 19000 SERIES — 0.022" AIR GAP — 850 V. PEAK

| Millen Cat. No. | Max. Cap. | Min. Cap. | Rotor Plates | Stator Plates | Dim. "S"            | Dim. "X"           |
|-----------------|-----------|-----------|--------------|---------------|---------------------|--------------------|
| 19025           | 30.5 mmf  | 5.7 mmf   | 2            | 2             | 2 $\frac{5}{8}$ "   | $\frac{7}{8}$ "    |
| 19035           | 39.1 mmf  | 6.0 mmf   | 3            | 2             | 2 $\frac{5}{8}$ "   | $\frac{7}{8}$ "    |
| 19050           | 58.0 mmf  | 6.5 mmf   | 4            | 3             | 2 $\frac{13}{16}$ " | 1"                 |
| 19075           | 80.5 mmf  | 7.5 mmf   | 5            | 5             | 2 $\frac{7}{8}$ "   | 1 $\frac{1}{8}$ "  |
| 19100           | 107.0 mmf | 8.2 mmf   | 7            | 6             | 3"                  | 1 $\frac{1}{4}$ "  |
| 19140           | 148.0 mmf | 9.7 mmf   | 9            | 9             | 3 $\frac{3}{16}$ "  | 1 $\frac{3}{8}$ "  |
| 19200           | 232.5 mmf | 11.7 mmf  | 14           | 13            | 3 $\frac{1}{2}$ "   | 1 $\frac{3}{4}$ "  |
| 19250           | 272.5 mmf | 13.0 mmf  | 17           | 16            | 3 $\frac{3}{4}$ "   | 2"                 |
| 19280           | 285.3 mmf | 20.0 mmf  | 18           | 17            | 3 $\frac{3}{4}$ "   | 2 $\frac{1}{16}$ " |
| 19335           | 339.0 mmf | 14.7 mmf  | 21           | 20            | 4 $\frac{1}{8}$ "   | 2 $\frac{3}{8}$ "  |

### 19000 SERIES — 0.066" AIR GAP — 2250 V. PEAK

|       |          |          |   |   |                   |                   |
|-------|----------|----------|---|---|-------------------|-------------------|
| 19935 | 40.0 mmf | 8.8 mmf  | 6 | 6 | 3 $\frac{5}{8}$ " | 1 $\frac{3}{4}$ " |
| 19950 | 60.0 mmf | 11.6 mmf | 9 | 9 | 4"                | 2 $\frac{1}{4}$ " |





**12000 SERIES TRANSMITTING CAPACITORS** — Rigid heavy channeled aluminum end plates. Ceramic insulation, polished or plain edges. One piece rotor contact spring and connection lug. Compact, easy to mount with connector lugs in convenient locations. Available in single and double sections and many capacities and plate spacings.

**28000 SERIES VARIABLE AIR CAPACITORS** — “Designed for Application,” double bearings, steatite end plates, plated brass plates. Single or double section .022” to .066” air gap. End plate size:  $1\frac{1}{16}$ ” x  $1\frac{1}{16}$ ”. Rotor plate radius:  $\frac{3}{4}$ ”. Shaft lock, rear shaft extension, special mounting brackets, etc., to meet your requirements. The 28000 series has semi-circular rotor plate shape. Many stock sizes.




**NEUTRALIZING CAPACITOR** — Designed originally for use in our own Power Amplifier, the No. 15011 disc neutralizing capacitor has such unique features as rigid channel frame, horizontal or vertical mounting, fine thread over-size lead screw with stop to prevent shorting and rotor lock. Heavy rounded-edged polished aluminum plates are 2” diameter. Glazed steatite insulation.

**NO. 25000 SERIES MACHINED FROM SOLID BARS OF EXTRUDED BRASS** — Modern demands for miniature precision, high Q variable air dielectric capacitors with high reliability require that all of the stator plates be machined from a solid block of brass and that all of the rotor plates be machined from a solid block of brass.



**WORM DRIVE UNIT** — Cast aluminum frame may be panel or base mounted. Spring loaded split gears to minimize back lash. Standard ratio 16/1. Also in 48/1, 36/1, 12/1. No. 10000 — (state ratio)

**RIGHT ANGLE DRIVE** — Extremely compact, with provisions for many methods of mounting. Ideal for operating potentiometers, switches, etc., that must be located, for short leads, in remote parts of chassis. No. 10012 For  $\frac{1}{4}$ ” shaft:





**PERMEABILITY TUNED CERAMIC FORMS** — The 69000 series of ceramic permeability tuned unshielded forms are stock items. Winding diameters available from  $\frac{3}{16}$ ” to  $\frac{1}{2}$ ” and winding space from  $\frac{1}{32}$ ” to  $1\frac{1}{2}$ ”.

|                              |                              |
|------------------------------|------------------------------|
| No. 69041—(Copper Slug)..... | No. 69052—(Iron Core).....   |
| No. 69042—(Iron Core).....   | No. 69054—(Iron Core).....   |
| No. 69043—(Iron Core).....   | No. 69055—(Copper Slug)..... |
| No. 69044—(Brass Slug).....  | No. 69056—(Iron Core).....   |
| No. 69045—(Copper Slug)..... | No. 69057—(Copper Slug)..... |
| No. 69046—(Iron Core).....   | No. 69058—(Iron Core).....   |
| No. 69047—(Copper Slug)..... | No. 69061—(Copper Slug)..... |
| No. 69048—(Iron Core).....   | No. 69062—(Iron Core).....   |
| No. 69051—(Copper Slug)..... |                              |

**MILLEN COIL FORMS** — Made of low loss mica filled brown bakelite. Guide funnel makes for easy threading of leads through pins. No. 45000 — No pins No. 45004— 4 pins No. 45005— 5 pins

**SHAFT LOCKS** — In addition to No. 10060 and No. 10061 shaft locks, we can also furnish such variations as the No. 10062 and No. 10063 for easy thumb operation. The No. 10061 converts any plain “ $\frac{1}{4}$ ” shaft” control, condenser, etc. from “plain” to “shaft locked” type.

**HIGH VOLTAGE INSULATED SHAFT EXTENSION** — No. 10061 shaft locks and the No. 39023 insulated high voltage potentiometer extension mountings are available as a single integrated unit — the No. 39024. The standard shaft has provision for screw driver adjustment. Extension shaft and insulated coupling are molded as a single unit to provide accuracy of alignment. No. 39023, non locking type .. No. 39024, locking type ..



**PHASE-SHIFT NETWORK** — A laboratory aligned pair of networks in a 2” x  $1\frac{1}{16}$ ” x 4” case with a phase shift between the two networks of  $90^\circ \pm 1.3^\circ$  over a frequency range of 225 to 2750 cycles. For use in SSB transmitter or receiver. 40 db suppression of the unwanted sideband. No. 75012

**DIALS AND KNOBS** — Just a few of the many stock types of small dials and knobs are illustrated herewith. 10007 is  $1\frac{1}{8}$ ” diameter, 10009 is  $2\frac{3}{4}$ ” and 10008 is  $3\frac{1}{2}$ ”.



# TRANSMATCH

CONVERTS IMPEDANCE OF ANY 15 TO 500 OHM COAXIAL FED ANTENNA SYSTEM TO 50 OHMS




The **No. 92200 Transmatch** is a 2 KW band-switching, adjustable r.f. transformer with a reflectometer as the indicator. The **Transmatch**, inserted between a transmitter and a transmission line, will convert the impedance of any 15 to 500 ohm coaxial fed antenna system to 50 ohms so that the transmitter may, at all frequencies, work into the impedance for which it was designed.

Most transmitters have pi-network tank circuits designed to work into a 50 ohm load. If the actual transmitter load is other than 50 ohms the transmitter cannot be loaded properly for optimum operation.

Multi-band beam antennas or trap dipoles are fed with 50 ohm coaxial cable, however, no antenna designed to cover a band of frequencies will look like a pure resistance of 50 ohms across even a portion of the band. There will be a mismatch as frequency is changed within a band. The antenna height, proximity to nearby objects, and its impedance at resonance affect the match or mismatch between the antenna and the transmission line. The match or mismatch between the antenna and the transmission line determines the impedance the transmission line presents to the transmitter. When the antenna is not matched into the 50 ohm transmission line, the transmitter load will not be 50 ohms even though 50 ohm coaxial cable is used. This means the transmitter will not be working into 50 ohms and will not do the job for which it was designed. With the **Transmatch** this situation is corrected.

The **Transmatch** is a single-ended or unbalanced unit intended to match single-ended transmitters to coaxial transmission lines. It can match any antenna system between 15 and 500 ohms to a transmitter impedance of 50 to 70 ohms.

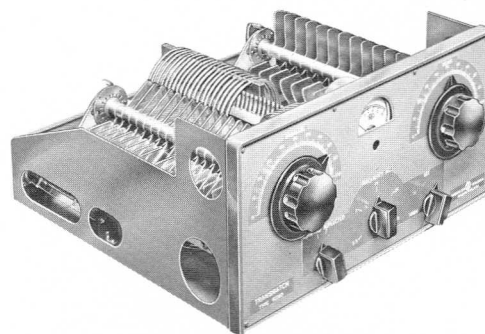

## TECHNICAL SPECIFICATIONS

**Input impedance** (transmitter) 50 to 70 ohms single-ended.

**Output impedance** (transmission line) 15 to 500 ohms coaxial: 10 to 1000 ohms at most frequencies.

**Frequency range** — 3.5, 7, 14, 21, 28 MC amateur bands band-switched.

**Power handling capability** — 2 KW peak.

**Indicator** — 50 ohm Reflectometer using a 200 micro-ampere meter.


**Desk top cabinet size:** 7" H. x 14" W. x 13<sup>5</sup>/<sub>8</sub>" D.

**Weight:** 17 lbs.


At most frequencies the antenna system impedance may be as low as 10 ohms or as high as 1000 ohms and still the **Transmatch** will match it to the 50 ohm transmitter output. It also has provisions for coupling the No. 90932 Modulation Monitor to the transmitter output.




# TRANSMATCH JUNIOR




Small, lightweight  
for mobile use.



Graduated dials  
for fast resetting.



Built-in sensitive meter.



Easy installation (2 bolts)

The **No. 92201 TRANSMATCH JUNIOR** is a 300 watt band-switching r.f. transformer with a reflectometer as the indicator. The **TRANSMATCH JUNIOR**, inserted between a transmitter and a transmission line, will convert the impedance of any 10 to 500 ohm coaxial fed antenna system to 50 ohms so that the transmitter may, at all frequencies, work into the impedance for which it was designed.

Most transmitters are designed to work into a 50 ohm load and lose efficiency working into other than a 50 ohm load. The impedance of any antenna varies as the frequency varies within a band and this causes a mismatch between the antenna and the 50 ohm transmission line. With this mismatch the transmitter works into other than the intended 50 ohm load and therefore loses efficiency. The **TRANSMATCH JUNIOR** converts this and any other mismatch in the antenna system into a 50 ohm load so that the transmitter will be properly loaded and work at peak efficiency at all frequencies.

## TECHNICAL SPECIFICATIONS

**Input impedance** (transmitter) 50 to 70 ohms single-ended.

**Output impedance** (transmission line) 10 to 500 ohms coaxial: 5 to 1000 ohms at most frequencies.


**Frequency range** — 3.5, 7, 14, 21, 28 MC. amateur bands band-switched.

**Power handling capability** — 300 watts peak.

**Indicator** — 50 ohm reflectometer using a 500 microampere meter.

**Cabinet size:** 7" W. x 4 $\frac{3}{4}$ " H. x 9" D. (including knobs)  
**Weight:** 6 lbs.

The **TRANSMATCH JUNIOR** is a lower power, lower cost, version of the **No. 92200 2 KW TRANSMATCH**. It is small and lightweight and therefore ideal for mobile use as well as for stationary use.

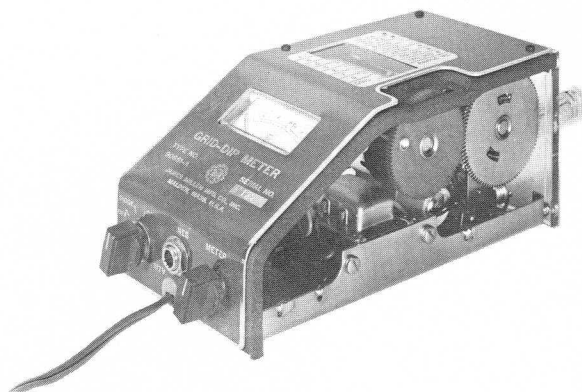

*"Designed for Performance"®*

## NO. 90651-A GRID DIP METER

The **Millen No. 90651-A** Grid Dip Meter features a transistor d.c. amplifier, and taut band meter.

The **No. 90651-A** has a transistor d.c. amplifier to increase sensitivity. It provides full scale meter reading at all frequencies from 1.7 to 300 mc. It has a modern, taut band meter to eliminate any possibility of the meter ever becoming "sticky." These additions are made while still maintaining all of the features which have made the Millen No. 90651 Grid Dip Meter so thoroughly reliable it has become the standard of the industry. It uses the same stable oscillator without spurious dips, it has a transformer-type power supply, it has seven coils protected by form fitting molded covers, etc.

The **No. 90651-A** is supplied complete in a convenient polypropylene carrying case which keeps the coil/probes with the Grid Dip Meter and protects both.

Five additional coils are available for extending the range to 165 KC.

The Millen 90651-A Grid Dip Meter is a calibrated stable RF oscillator unit with a transistorized electronic voltmeter to indicate the amplitude of the output. The frequency determining coil is plugged into the unit so that it may be used as a probe.

There are a set of terminals on the internal printed circuit board to provide connections for battery operation where it is desirable to use the unit on antenna measurements and other applications where A.C. power is not available. Compactness has been maintained with improvement in performance and convenience of use while still keeping the unusual ease of reading the dial accurately.





## SOLID-STATE DIPPER

The Millen No. 90652 Solid-State Dipper introduces a new dip oscillator with performance comparable to that of the best vacuum-tube grid dip meters previously available, but with the universal advantage of battery power which eliminates the power cord and provides a portability which is not restricted by the requirement for a-c power.

The operating features of the No. 90652 Solid-State Dipper include (1) a sensitive oscillator-dipper for checking resonant frequencies of non-energized resonant circuits, and (2) an absorption-type wavemeter with the oscillator circuit arranged to act as a Q-Multiplier Amplifier, providing both a sharp tuning response and great sensitivity. The frequency range of 1.7 to 300 Mc/s is covered by 7 plug-in coils, with some overlap between ranges. The lowest frequency coil (1.7 to 4.0 Mc/s) is wound on a powdered-iron core to increase Q and improve coupling to circuits being checked.

The circuit of the No. 90652 Solid-State Dipper is reliable and straight-forward, making use of standard semiconductor elements. The oscillator is a 3N128 MOS-FET in a Colpitts circuit. The r-f voltage across the tank circuit is rectified by 2-1N3604 diodes in a full-wave connection to develop a d-c voltage proportional to the r-f present in the coil. This d-c voltage is indicated by means of a JFET (2N5459) d-c amplifier on a rugged 1 ma. full-scale meter using a taut-band suspension. A suppressed-zero

system is used to enhance the sensitivity of the dip indication. Provision is made for the use of headphones to aid in detecting beats and in listening to any modulation which may be present on a signal. The meter-setting potentiometer incorporates an easily visible indicator to show whether the battery switch is ON or OFF.

The performance of the Millen No. 90652 Solid-State Dipper is equal to or superior to that of the previous standards of the industry, the Millen No. 90651-A and No. 90662-A Grid Dip Meters. In addition, it offers the convenience of self-contained battery power for complete portability.

The No. 90652 Solid-State Dipper is supplied in a convenient polypropylene carrying case with a complete set of coils and a 9-volt alkaline battery to provide instant operation. A 1/4"-20 tapped socket hole is provided for attachment of a wrist strap, or other retaining device to prevent dropping the dipper when using it in hazardous locations, such as on antenna masts for checking beam antennas.


**Size of Dipper** — 7 1/4" L x 3 1/2" W x 3 3/16" H

**Weight of Dipper** — 2 1/2 Pounds with battery

**Size of Carrying Case With Dipper and Coils** — 11 3/8" L x 5 1/8" W x 4" H

**Shipping Weight** — 7 Pounds

**Price of Complete Unit** — \$110.00

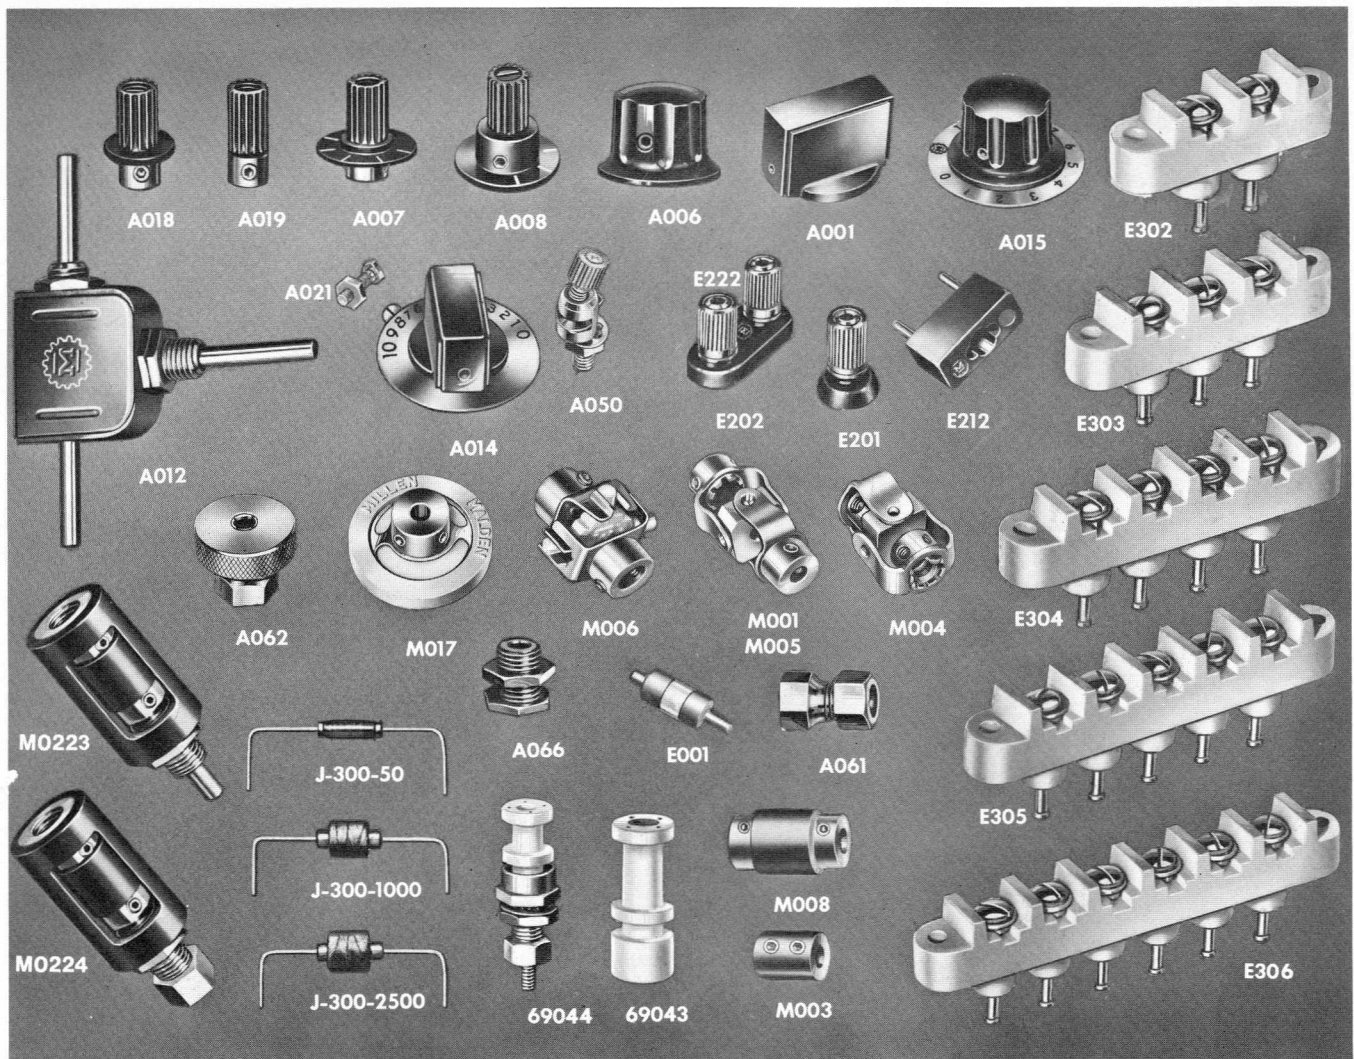

## MINIATURIZED COMPONENTS

DESIGNED for APPLICATION miniaturized components developed for use in our own equipment such as the 90901 Oscilloscope, are available for separate sale. Many of these parts are similar, in most details except size, to their equivalents in our standard component parts group. In certain devices where complete miniaturization is not paramount, a combination of standard and miniature components may possibly be used to advantage. For convenience, we have also listed on this page the extremely small sized coil forms from our standard catalog.

| Code | Description                                                                                                                                |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|
| A001 | Bar knob for $\frac{1}{8}$ " shaft. $\frac{1}{2}$ " high by $\frac{3}{4}$ " long.                                                          |
| A006 | Fluted black plastic knob with brass insert for $\frac{1}{8}$ " shaft. $\frac{1}{2}$ " high by $\frac{3}{4}$ " diameter.                   |
| A007 | $\frac{1}{4}$ " black plastic dial knob with brass insert for $\frac{1}{8}$ " shaft. $\frac{5}{8}$ " diameter dial. $\frac{3}{16}$ " high. |
| A008 | $\frac{1}{4}$ " black plastic knob. Same as no. A007 except for style.                                                                     |
| A012 | Right angle drive for $\frac{1}{8}$ " shafts. Single hole mounting.                                                                        |
| A014 | 1" bar dial for $\frac{1}{8}$ " shaft. $\frac{1}{2}$ " high. 180° or 280° dials for clockwise or counter-clockwise rotation.               |
| A015 | 1" fluted knob dial for $\frac{1}{8}$ " shaft. $\frac{1}{2}$ " high. Same dial plates as no. A014.                                         |
| A017 | $1\frac{1}{8}$ " diameter fluted black plastic knob for $\frac{1}{8}$ " shaft.                                                             |
| A018 | Knob, same as no. A007 except with $\frac{7}{16}$ " diameter flange.                                                                       |
| A019 | Knob, same as no. A007, but without dial.                                                                                                  |
| A021 | Miniature metal index for miniature dials.                                                                                                 |
| A050 | Miniature dial lock.                                                                                                                       |
| A061 | Shaft lock for $\frac{1}{8}$ " diameter shaft. $\frac{1}{4}$ "-32 bushing. Nickel plated brass.                                            |
| A062 | Shaft lock with knurled locking nut.                                                                                                       |
| A066 | Shaft bearing for $\frac{1}{8}$ " diameter shafts. Nickel plated brass. Fits $\frac{7}{64}$ " diameter hole.                               |

| Code     | Description                                                                                                                                              |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| E001     | Steatite ceramic standoff or tie-point. Integral mounting eyelet. 0.205" overall diameter.                                                               |
| E201     | Black or red plastic binding post plates for No. E222.                                                                                                   |
| E202     | Black or red plastic plates for two binding posts spaced $\frac{1}{2}$ ".                                                                                |
| E212     | Black or red plastic plug for two binding posts spaced $\frac{1}{2}$ ".                                                                                  |
| E222     | Metal binding post with jack top.                                                                                                                        |
| E302A    | to E306A Steatite ceramic terminal strips. $\frac{3}{16}$ " wide. Terminals spaced $\frac{3}{8}$ " on centers. Screw type or solder type thru-terminals. |
| J300-3.3 | to J300-2500 Complete line of miniature inductances 3.3 to 2500 microhenries. $\frac{3}{8}$ " long. Diameter 0.115" to 0.313".                           |
| M001     | Insulated universal joint style flexible coupling for $\frac{1}{8}$ " dia. shafts.                                                                       |
| M003     | Solid coupling for $\frac{1}{8}$ " dia. shafts. Nickel plated brass.                                                                                     |
| M004     | Universal joint style flexible coupling for $\frac{1}{8}$ " diameter shafts. Inverted hubs for short length. Not insulated.                              |
| M005     | Universal joint style flexible coupling for $\frac{1}{8}$ " diameter shafts. External hub. Not insulated.                                                |
| M006     | Universal joint style flexible coupling for $\frac{1}{8}$ " diameter shafts. Spring finger. Steatite ceramic insulation.                                 |
| M008     | Plastic insulated coupling with nickel plated brass inserts for $\frac{1}{8}$ " diameter shafts.                                                         |
| M017     | Plastic insulated flexible coupling for $\frac{1}{8}$ " diameter shafts. $\frac{1}{32}$ " long by $\frac{1}{16}$ " diameter. Bronze yoke.                |
| M023     | Insulated shaft extension for $\frac{1}{4}$ "-32 bushing and $\frac{1}{8}$ " shaft. For mounting sub-miniature potentiometer.                            |
| M024     | Locking insulated shaft extension similar to no. M023.                                                                                                   |
| 69043    | Steatite ceramic coil form. Adjustable core. Winding space $\frac{1}{4}$ " diameter by $\frac{1}{32}$ " long. Mounting 4-40 hole.                        |
| 69044    | Steatite ceramic coil form. Adjustable core. Winding space 0.187" dia. by $\frac{3}{16}$ " long. No. 10-32 mounting.                                     |