


MODELS

Flat Panel TFT5010 Touchscreen Monitor

163181-001 NA

163181-021 EMEA

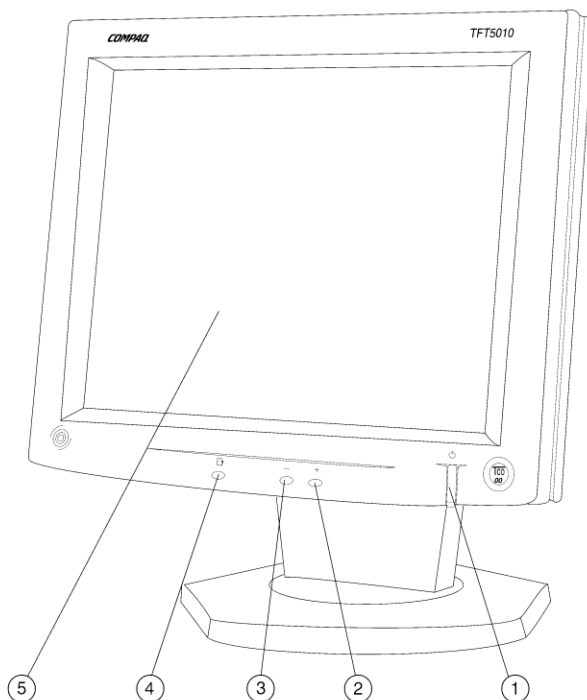

1. Power On/Off
2. Menu Control (+)
3. Menu Control (-), automatic adjustment
4. Menu
5. Touch Screen

COMPAQ

AT A GLANCE

- Active Matrix TFT
- Microtouch technology
- 15.1" viewable area
- One DVI-I connector
- 200 Nits Brightness
- 18.7lbs (including base)
- Opal Color
- Plug and Play

SPECIFICATIONS

Note: AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring Intelligent Manageability.

Note: AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring intelligent manageability.

Type	Active Matrix TFT (thin film transistor)			
Liquid Crystal Display (diagonal)	15 inch Flat Panel			
Viewable (diagonal)	15.1 inch/38.3 cm			
Touchscreen Technology	Microtouch 5 wire			
Input Method	Finger			
Touch Durability	Greater than 35 million touches in a single location			
Touch Activation Force	Less than 100 grams/ ounce			
Scratch Hardness	4H (per ASTM 3363)			
Tapping Test	Finger like stylus – durometer 60, "A" shore hardness, .05" Diameter load 4.9 +/- 0.1 ounces			
Pixel Pitch	0.30 mm			
Contrast Ratio	200:1			
Typical Brightness	200 nits			
Graphic Preset Modes	1024 x 768 60 Hz, 70 Hz and 75 Hz	800 x 600 60 Hz, 75 Hz and 85 Hz	640 x 480 60 Hz, 75 Hz and 85 Hz	640 x 350 70 Hz
Note: All modes are non-interlaced unless specified otherwise.				
Text Mode	720 x 400 70 Hz			
Mac Compatible Modes	832 x 624 74.5 Hz			
Note: Adapter required.				
User-Programmable Modes	4			
Anti-Glare	Yes			
Anti-Static	Yes			
Plug and Play	Yes			
Agency Approvals/Certifications	UL Approval		Yes	
	ISO9241-3 VOT Guidelines Approval		Yes	
	MPR-II Compliant		Yes	
	FCC Approval		Yes	
	Energy Star Compliant		Yes	
	TCO 95 (Low Emissions)		Yes	
	PC97 Certified		Yes	

SPECIFICATIONS *(continued)*

On-Screen Controls	Yes	
Language Selection	English	Yes
	Spanish	Yes
	French	Yes
	German	Yes
	Dutch	Yes
	Italian	Yes
User Controls	Brightness, Contrast	Yes
	Auto Adjustment	Yes
	Sizing, Positioning	Yes
	Color temperature (6500k, 9300k, Custom)	Yes
	Individual color control	Yes
	Full Screen 640 x 480, 800 x 600 Resolutions	Yes
	Clock	Yes
	Clock Phase	Yes
	Clock Phase fine	Yes
	Monitor Management	Full Screen, Display Mode (on/off), Power Saver (on/off), Serial Number Sleep Timer, Basic Menu
	Factory Reset	Yes
AssetControl	Yes	
	Note: When used with Compaq Intelligent Manageability CPUs and appropriate network software.	
Pixel Clock Speed	78.75 MHz	
Input Impedance	75 ohms \pm 10%	
Horizontal Frequency	31.5 to 60 kHz	
Vertical Frequency	58 to 78.75 Hz	
Power Supply ALS	Universal/Auto-Sensing, 90 to 132/195 to 265 VAC, 47 to 63 Hz	
Maximum Power Rating	> 45W	
USB Capabilities	No	
Power Supply ALS	Universal/Auto-Sensing, 90 to 132/195 to 265 VAC, 47 to 63 Hz	
	Note: AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring Intelligent Manageability.	
Maximum Power Rating	> 45W	
USB Capabilities	No	
Synchronized Input	TTL separate synchronized	
Signal Cable	One DVI-I (Analog/Digital) connector	
Protective Panel	Yes-Optional	
Detachable Base	Yes	
Dimensions (HxWxD)	With base: 15.7 x 15.4 x 8.6 inches/40 x 39 x 21.8 cm Without base: 12.5 x 15.4 x 3.1 inches/31.8 x 39 x 7.8 cm	
Weight	With base: 18.7 pounds/8.5 kg Without base: 12.1 pounds/5.5 kg	
Monitor Casing Color	Opal	
Temperature	Operating	41° to 95° F/5° to 35° C
	Non-operating	-4° to 140° F/-20° to 60° C
Humidity	Operating	20% to 80%
	Non-operating	5% to 95%
Warranty	Three-year parts, including backlight; first year, on-site labor	
	Note: Certain restrictions apply. Consult the Compaq Customer Service Support Center for details.	

COMPATIBILITY

The TFT5010i is compatible with all platforms using the VESA standard

Note: Features are subject to change without notice.

Compaq PCs use genuine Microsoft® Windows®

www.Microsoft.com/piracy/howtotell

Microsoft and Windows are trademarks of Microsoft Corporation in the U.S. and other countries.