

# NISE 3110

Intel® Core™ 2 Duo, Core™ Duo, Celeron® M  
Fanless System with 1 x PCI Expansion Slot



## Main Features

- Support Intel® Core™ 2 Duo /Core™ Duo/ Celeron® M processors
- Intel® 945GME Chipsets
- Dual 1000/100/10Mbps LAN ports
- 6 x USB2.0/ VGA / DVI
- 3 x RS232 and 1 x RS232/422/485 via DB44 Connector
- On-board DC to DC power design to support +12V to 30V DC power input
- Support ATX power mode and PXE / WoL
- One PCI Expansion Slot

## Product Overview

Featuring Intel® 945GME & ICH7-M chipsets, the NISE 3110 Fanless computer supports Intel's Core™ 2 Duo /Celeron® M processor with 533/667 MHz FSB and DDR2 667/533 memory. The rugged NISE 3110 fanless computer is designed for space-critical application requires extreme reliability, low-power consumption and versatile I/O configuration. For added flexibility, the NISE 3110 also boasts three RS232 ports, one RS232/422/485 port and one PCI expansion slot. For data storage, the NISE 3110 provides one CompactFlash socket and one 2.5" HDD drive bay. The System supports ATX mode power feature and can accept a wide range of power supplies from 12 V DC to 30 V DC.

Housed in a compact 195 mm x 268 mm x 80 mm heavy-duty aluminum chassis, the NISE 3110 is designed for reliable, maintenance-free industrial computing. The NISE 3110 fanless computer offers a cost-effective solution for a multitude of mission-critical embedded computing applications in automation, machine control, and POS systems.

## Specifications

### Main Board

- EBC 576FL
- Support Intel® Core™ 2 Duo, Core™ Duo, Celeron® M family processors
- Support 533/667 MHz FSB CPU
- Intel® Embedded Processor Reference List (Intel® Longevity CPU):  
Core™ Duo Processor (T2500) 2.0G  
Celeron® M 440 1.86G

### Chipset

- Intel® 945GME Graphics Memory Controller Hub (GMCH)
- Intel® 82801 ICH7-M

### Main Memory

- 2 x 240-pin DDR2 533/667 DIMM sockets, up to 4 GB, dual channel unbuffered non-ECC
- \* Note: Maximum 4GB. Actual memory size is dynamic based on the OS I/O resource allocation

### Expansion

- Supports one 32-bit/ 33MHz PCI card (10W max./ per slot)

- PCI card:  
Max. 160mm in length with 2.5" HDD installed  
Max. 240mm in length without 2.5" HDD installed


### I/O Interface-Front

- Customized logo (Optional)
- HDD Access/Power/LAN status LEDs
- 2 x USB 2.0 ports
- ATX power on/off switch

### I/O Interface-Rear

- 2 x PS/2 Keyboard/Mouse
- 1 x DB15 VGA connector
- 4 x USB 2.0 ports
- 2 x GbE LAN Ports
- 1 x DVI-D interface
- 4 x Serial Ports, with 1x DB44 connector  
(Three ports support RS232; One port supports RS232/422/485)
- 1 x Mic-in and 1 x Speaker-out
- 1 x 2-pin connector output for remote power on/off switch
- DC-in power connector for +12V ~+30V DC power input

## Dimension Drawing

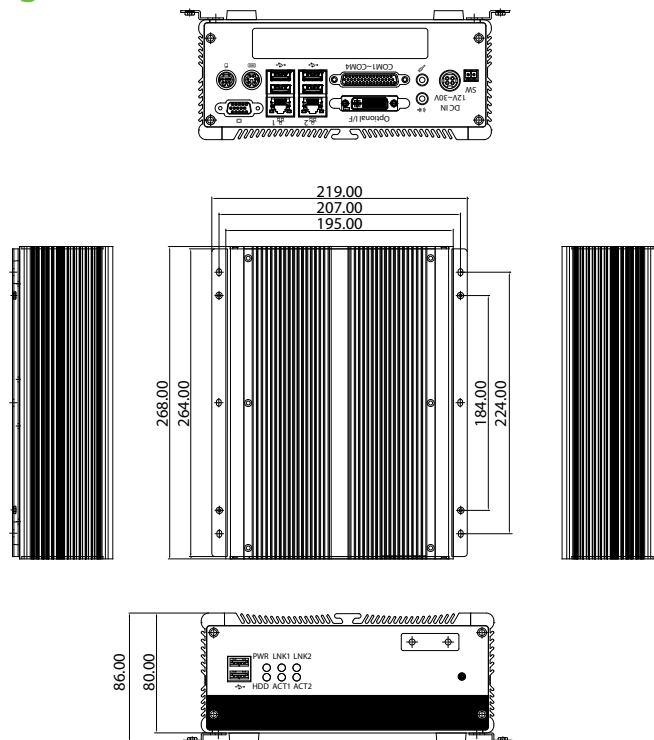

### Device

- 1 x On-board CompactFlash socket
- 1 x Internal 2.5" HDD drive bay

### Power Requirements

- DC to DC power designed on board, support from 12V to 30V DC input (Max: 120 Watts)
- 1 x External 120 W AC adapter (lockable)
  - Power input: 100 to 240V AC 2 A 50/60 Hz
  - Power output: 19V DC

### Dimensions

- 195 mm (W) x 268 mm (D) x 80 mm (H) (7.7" x 10.5" x 3.1")

### Construction

- Aluminum chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -5°C ~ 55°C
  - (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (Non-Condensing)
- Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- Vibration protection
  - Random: 0.5Grms @5~500 Hz according to IEC68-2-64
  - Sinusoidal: 0.5Grms @5~500 Hz according to IEC68-2-6

### Certifications

- CE approval
- FCC Class A

## Ordering Information

### Barebone

#### ♦ NISE 3110 (P/N: 10J00311000X0)

Intel® Core™ 2 Duo, Core™ Duo, Celeron® M Fanless Bare-Bone System, 1 x PCI Expansion Slot

#### ♦ w/Core™ 2 Duo 1.5 GHz 4M L2 (BGA) NISE 3110-L74 (P/N: 10J00311005X0)

Intel® Core™ 2 Duo 1.5 GHz CPU w/4M L2 Fanless System 1 x PCI Expansion Slot