


Sleeves for Wire and Cable Marking by Size

3-TO-1 SHRINK RATIO ONE-SIDED PRINTABLE PERMASLEEVE™ WIRE MARKERS



PERMASLEEVE™ markers fit snugly around wires for maximum insulation protection and permanent identification.

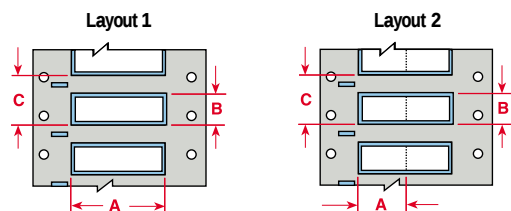

BRADY PERMASLEEVE™ shrink to fit insulating wire markers meet the rigid insulating, material requirements and physical properties of MIL-DTL-23053/5 Class 1, MIL-M-81531, MIL-STD-202F, METHOD 215, and UL224. The heat-shrinkable irradiated polyolefin does not smudge or fade when printed, while the unique flattened full-circle design provides fast, permanent wire marking. PERMASLEEVE™ markers may be printed on BRADY's thermal transfer printers.

White Polyolefin (B-342) One-Sided Printable PERMASLEEVE™ Markers

Reference	Markers Per Box	Range of Wire Dia. mm			Marker Width A mm	Marker Height B mm	Vertical Repeat C mm	Layout	Recommended Ribbon Series
		Min.		Max.					
38.10 mm Marker Width									
PS-094-150W	2,500	0.58	–	2.03	38.10	4.60	12.70	1	R-7950
PS-094-150W-S	500	0.58	–	2.03	38.10	4.60	12.70	1	R-7950
PS-125-150W	2,500	1.17	–	2.79	38.10	6.00	12.70	1	R-7950
PS-125-150W-S	500	1.17	–	2.79	38.10	6.00	12.70	1	R-7950
PS-187-150W	2,500	1.57	–	3.81	38.10	8.50	15.88	1	R-7950
PS-187-150W-S	500	1.57	–	3.81	38.10	8.50	15.88	1	R-7950
PS-250-150W	2,500	2.39	–	5.46	38.10	11.15	19.05	1	R-7950
PS-250-150W-S	500	2.39	–	5.46	38.10	11.15	19.05	1	R-7950
PS-375-150W	1,000	3.18	–	8.13	38.10	16.40	25.40	1	R-7950
PS-375-150W-S	250	3.18	–	8.13	38.10	16.40	25.40	1	R-7950
PS-500-150W	500	4.75	–	11.43	38.10	21.60	31.75	1	R-7950
PS-500-150W-S	250	4.75	–	11.43	38.10	21.60	31.75	1	R-7950
50.80 mm Marker Width									
PS-094-2W	2,500	0.58	–	2.03	50.80	4.60	12.70	1	R-7950
PS-094-2W-S	500	0.58	–	2.03	50.80	4.60	12.70	1	R-7950
PS-125-2W	2,500	1.17	–	2.79	50.80	6.00	12.70	1	R-7950
PS-125-2W-S	500	1.17	–	2.79	50.80	6.00	12.70	1	R-7950
PS-125-2W-2S	1,000	1.17	–	2.79	50.80	6.00	12.70	2	R-7950
PS-187-2W	2,500	1.57	–	3.81	50.80	8.50	15.88	1	R-7950
PS-187-2W-S	500	1.57	–	3.81	50.80	8.50	15.88	1	R-7950
PS-187-2W-2S	1,000	1.57	–	3.81	50.80	8.50	15.88	2	R-7950
PS-250-2W	2,500	2.39	–	5.46	50.80	11.15	19.05	1	R-7950
PS-250-2W-S	500	2.39	–	5.46	50.80	11.15	19.05	1	R-7950
PS-250-2W-2S	1,000	2.39	–	5.46	50.80	11.15	19.05	2	R-7950
PS-375-2W	1,000	3.18	–	8.13	50.80	16.40	25.40	1	R-7950
PS-375-2W-S	250	3.18	–	8.13	50.80	16.40	25.40	1	R-7950
PS-500-2W	500	4.75	–	11.43	50.80	21.60	31.75	1	R-7950
PS-500-2W-S	250	4.75	–	11.43	50.80	21.60	31.75	1	R-7950

2-to-1 Shrink Ratio White Polyolefin (B-341) One-Sided Printable PERMASLEEVE™ Markers

Reference	Markers Per Box	Range of Wire Dia. mm			Marker Width A mm	Marker Height B mm	Vertical Repeat C mm	Recommended Ribbon Series
		Min.		Max.				
50.80 mm Marker Width								
PS-1000-2W	250	11.43	—	24.13	50.80	42.16	50.80	R-7950


*Based on National Electric Code insulation measurement of THHN wire.

Sleeves may be perforated at factory for shorter marker lengths. Depending on overall length, sleeves may be perforated in halves, thirds or quarters. Contact your BRADY Identification Solutions Distributor or Customer Service Representative for ordering information.



Sleeves for Wire and Cable Identification

3-TO-1 SHRINK RATIO TWO-SIDED PRINTABLE PERMASLEEVE™ MARKERS

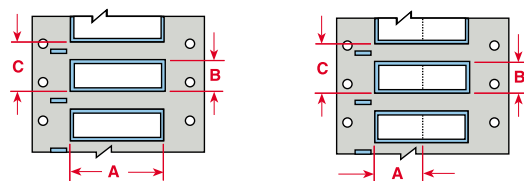

PERMASLEEVE™ shrink to fit markers are available in a 3-to-1 shrink ratio to cover a wider range of wire diameters per sleeve size.



BRADY's PERMASLEEVE™ markers provide a complete wire marking solution that combines speed, ease of use, and permanence to create long-lasting, high quality identification.

White Polyolefin (B-342) Two-Sided Printable PERMASLEEVE™ Markers

Reference	Markers Per Box	Range of Wire Diameter		Marker Width A mm	Marker Height B mm	Vertical Repeat C mm	Recommended Ribbon Series
		Min. mm	Max. mm				
50.80 mm Marker Width							
3PS-094-2W	2,500	0.58	– 2.03	50.80	4.60	12.70	R-7950
3PS-094-2W-S	500	0.58	– 2.03	50.80	4.60	12.70	R-7950
3PS-125-2W	2,500	1.17	– 2.79	50.80	6.00	12.70	R-7950
3PS-125-2W-S	500	1.17	– 2.79	50.80	6.00	12.70	R-7950
3PS-187-2W	2,500	1.57	– 3.81	50.80	8.50	16.00	R-7950
3PS-187-2W-S	500	1.57	– 3.81	50.80	8.50	16.00	R-7950
3PS-250-2W	2,500	2.39	– 5.46	50.80	11.15	19.05	R-7950
3PS-250-2W-S	500	2.39	– 5.46	50.80	11.15	19.05	R-7950
3PS-375-2W	1,000	3.18	– 8.13	50.80	16.40	25.40	R-7950
3PS-375-2W-S	250	3.18	– 8.13	50.80	16.40	25.40	R-7950
3PS-500-2W	500	4.75	– 11.43	50.80	21.60	31.75	R-7950
3PS-500-2W-S	250	4.75	– 11.43	50.80	21.60	31.75	R-7950

*Based on National Electric Code insulation measurement of THHN wire.

Sleeves may be perforated at factory for shorter marker lengths. Depending on overall length, sleeves may be perforated in halves, thirds or quarters. Contact your BRADY Identification Solutions Distributor or Customer Service Representative for ordering information.

3-TO-1 SHRINK RATIO CONTINUOUS PERMASLEEVE™ MARKERS


White Polyolefin (B-342) Continuous PERMASLEEVE™ Markers

Reference	Length	Range of Wire Diameter		Marker Width mm	Marker Height mm	Recommended Ribbon Series
		Min. mm	Max. mm			
TPS-094-W	30.5 m	0.58	– 2.03	4.60	Continuous	R-7950
TPS-125-W	30.5 m	1.17	– 2.79	6.00	Continuous	R-7950
TPS-187-W	30.5 m	1.57	– 3.81	8.50	Continuous	R-7950
TPS-250-W	30.5 m	2.39	– 5.46	11.15	Continuous	R-7950
TPS-375-W	30.5 m	3.18	– 8.13	16.40	Continuous	R-7950
TPS-500-W	30.5 m	4.75	– 11.43	21.60	Continuous	R-7950

Sleeves for Wire and Cable Identification

CONTINUED

COLOURED TWO-SIDED 3-TO-1 SHRINK RATIO PERMASLEEVE™ MARKERS

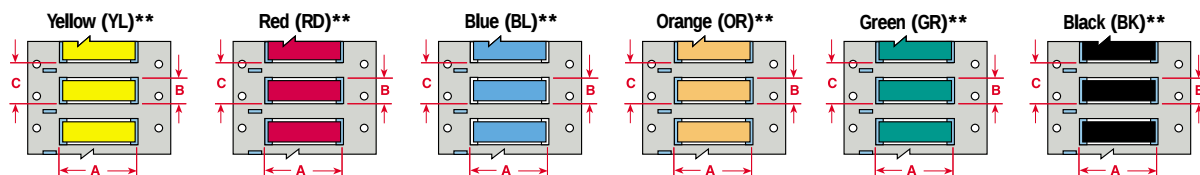

PERMASLEEVE™ Shrink to fit markers are available in a 3-to-1 shrink ratio to cover a wider range of wire diameters per sleeve size.

3-to-1 Shrink Ratio Coloured Polyolefin (B-342) Two-Sided Printable PERMASLEEVE™ Markers

Reference	Markers Per Box	Range of Wire Dia. Min. mm	Max. mm	Marker Width A mm	Marker Height B mm	Vertical Repeat C mm	Recommended Ribbon Series
50.80 mm Marker Width							
3PS-094-2YL	2,500	0.58	2.03	50.80	4.60	12.70	R-7950
3PS-094-2**-S	500	0.58	2.03	50.80	4.60	12.70	R-7950
3PS-125-2YL	2,500	1.17	2.79	50.80	6.00	12.70	R-7950
3PS-125-2**-S	500	1.17	2.79	50.80	6.00	12.70	R-7950
3PS-187-2YL	2,500	1.57	3.81	50.80	8.50	15.88	R-7950
3PS-187-2**-S	500	1.57	3.81	50.80	8.50	16.00	R-7950
3PS-250-2YL	2,500	2.39	5.46	50.80	11.15	19.05	R-7950
3PS-250-2**-S	500	2.39	5.46	50.80	11.15	19.05	R-7950
3PS-375-2YL	1,000	3.18	8.13	50.80	16.40	25.40	R-7950
3PS-375-2**-S	250	3.18	8.13	50.80	16.40	25.40	R-7950
3PS-500-2YL	500	4.75	11.43	50.80	21.60	31.75	R-7950
3PS-500-2**-S	250	4.75	11.43	50.80	21.60	31.75	R-7950

*Based on National Electric Code insulation measurement of THHN wire.

**When ordering a colour add YL (Yellow), RD (Red), BL (Blue), OR (Orange), GR (Green), BK (Black).


Contact your BRADY Identification Solutions Distributor or Customer Service Representative for ordering information.

2-to-1 Shrink Ratio Colored Polyolefin (B-341) One-Sided Printable PERMASLEEVE™ Markers

Reference	Markers Per Box	Range of Wire Dia. Min. mm	Max. mm	Marker Width A mm	Marker Height B mm	Vertical Repeat C mm	Recommended Ribbon Series
50.80 mm Marker Width							
PS-1000-2Y	250	11.43	24.13	50.80	42.16	50.80	R-7950
PS-1000-2BK-S	100	11.43	24.13	50.80	42.16	50.80	R-7950

Sleeves may be perforated at factory for shorter marker lengths. Depending on overall length, sleeves may be perforated in halves, thirds or quarters. Contact your BRADY Identification Solutions Distributor or Customer Service Representative for ordering information.

DURASLEEVE™ WIRE MARKING SYSTEM

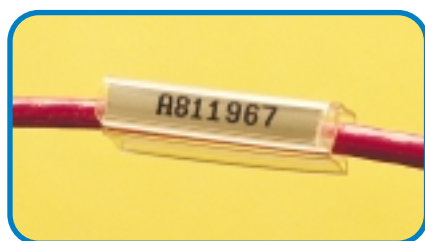

DURASLEEVE™ wire marker inserts fit into clear carriers.

BRADY DURASLEEVE™ Markers Create a Durable Legend

Combining speed, power and flexibility, the new DURASLEEVE™ wire marking system provides the logical next chapter in the BRADY legend. That's because the DURASLEEVE™ wire marking system does everything your current wire marking system does, and then provides advantages you can't find anywhere else:

- ▶ DURASLEEVE™ wire marking system meets current engineering specifications.
- ▶ DURASLEEVE™ wire marking system reduces inventory by providing markers "just-in-time."
- ▶ DURASLEEVE™ wire marking system saves time by printing legends on-demand.
- ▶ DURASLEEVE™ wire marking system portability brings labelling on site: SLV-DAT-PTR, ID PRO® PLUS and LS2000.
- ▶ DURASLEEVE™ wire marking system increases efficiency by allowing importation of data from computer applications.
- ▶ DURASLEEVE™ wire marking system performance meets or exceeds any materials you are currently using.