

75 ohm CABLE Single Screened UR 70 - G03139 Double Screened Telcon	BNC Male	2.5/6 Male	2.5/6 Female	2.5/6 Angle Male	BPO No 10 Male	BPO No 10 Female	1.6/5.6 Male	1.6/5.6 Female	1.6/5.6 Angle Male *	NEC Min Male Crimp	NEC Min Female Crimp
BNC	1										
BNC Female											
BNC Angle Male											
BPO No 10 Male	2	12			26						
BPO No 10 Female	3	13			27	35					
NEC Min Male Crimp	4	14								54	
NEC Min Female Crimp	5	15								55	56
2.5/6 Male	6	16									
2.5/6 Female											
2.5/6 Angle Male				25							
1.6/5.6 Male	7	17			28	36	42				
1.6/5.6 Female		18			29			48			
1.6/5.6 Angle Male *									53		
4/13 Unshrouded Male		19			30	37	43				
4/13 Shrouded Male		20									
3 Pin Banana	8	21			31	38	44	49			
2 Single Banana	9	22			32	39	45	50			
2 Alligator Clips	10	23			33	40	46	51			
Unterminated	11	24			34	41	47	52			

1. Crimp Connectors used wherever possible.
- 2* Snap on version.
3. 75 ohm cable used with standard inner.
4. If double screened cable required, please specify by using designation 75D cable supplied Telcon 1%.
5. The above cables are standard lines, generally 1 week ex factory.
Special types made on request. Delivery dependent on availability of non stocked connectors.

2 CONDUCTOR UNSHIELDED CABLE Series 2	2 Pin Banana	T & S Plug	T.R.S. 316	2 x Single Banana	2 x Alligator	Combination 316/Ericsson	Unterminated
2 Pin Banana	1						
T & S Plug	2	8					
T.R.S. 316	3		12				
2 x Single Banana	4	9	13	16			
2 x Alligator	5	10	14	17	18		
Combination 316/Ericsson	6						
Unterminated	7	11	15				

SHIELDED TWIN Series 2SC Series 2SV	3 Pin Banana	3 Single Banana	3 Alligator Clips	Twin Carrier T & S	Twin Carrier T.R.S.	A.P.O. 316	Miniature Ericsson T.R.S.	Combination 316/Ericsson	Unterminated
3 Pin Banana	1								
3 Single Banana	2	10							
3 Alligator Clips	3	11	17						
Twin Carrier T & S	4	12	18	23					
Twin Carrier T.R.S.	5	13	19		26				
A.P.O. 316	6	14	20	24		28			
Miniature Ericsson TRS	7	15	21				30		
Combination 316/Ericsson	8	16	22					32	
Unterminated	9			25	27	29	31	33	

A.C. & E. MINIATURE LAMPS

A.C. & E. stock a range of miniature lamps in the following series:

Standard Telephone	T 6.8 F	Dia 6 x 44
Liliput	T 5.5	Dia 5 x 30
Liliput Courte	T 5.5 K	Dia 5 x 22
Sub Liliput	T 4.6	Dia 4 x 22
Standard Telephone	T 6.5	Carbon Filament Dia 6 x 44 Socket PTT
Standard Telephone	T 6.8	German Type Dia 6 x 44
Standard Telephone	T 5.8	Swedish Type Dia 5 x 42
Standard Telephone	T 7	British Type Dia 6 x 44

A.C. & E. MINIATURE FUSES - 250 V

Without indicator interchangeable
(Without fitting device)

Type GF

Fast Acting

Without indicator interchangeable
(Without fitting device)

Medium operating time


Type GM

Without indicator interchangeable
(Without fitting device)

Slow operating time

Type GS

CABLE RACKS



These essential cord storage racks for equipment rooms and exchanges are made from formed steel with a heavy coating of P.V.C. to protect your cords and plugs.

They come in a variety of sizes for wall mounting or to mount on the side or front of racks, cupboards, etc.

TYPE	NO OF SLOTS	LENGTH	
		INCHES	MM
CR1	23	35½"	902
CR2	12	19"	483
CR3	9	14½"	368
CR4	5	8½"	216

Slot length	2.1/8"	(54 mm)
Slot width	3/8"	(9.5 mm)
Slot spacing	1.1/2"	(38 mm)

CABLE STRAINERS

Type AKL 2 \$4.60


For Power
Cable



CABLE STRAINERS

Type AKL 1 \$4.60

For Telephone
Cable

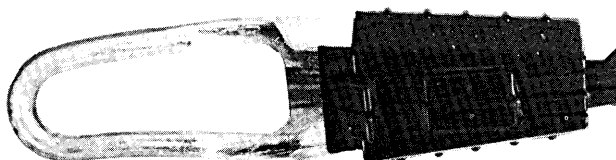

RUBBER SHROUDED HANDSET

Type BL/E178



Shockproof
1 m cord
Battery operated
With Carrying Case

