PLUG

Single Banana, 4 mm Diameter,
with Transverse Monitoring

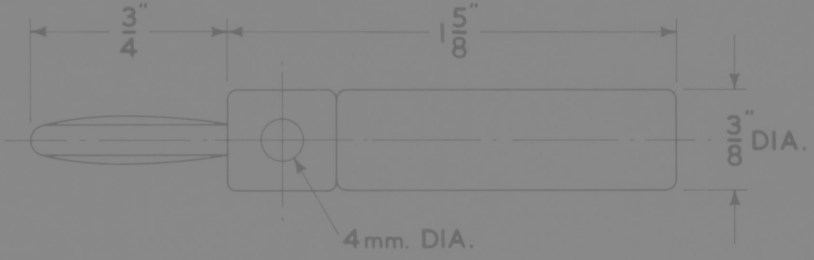

TYPE	COLOUR	SER/ITEM
1001	Black	236/849
1002	Red	236/848
1003	White	236/847
1004	Grey	N/S
1005	Blue	236/850
1006	Green	236/851
1007	Yellow	N/S

APPLICATION: *Used with single wire patch cords and D.C. measurements*

PLUG 2 Pin Banana, 4 mm Diameter.

CORD CONNECTING

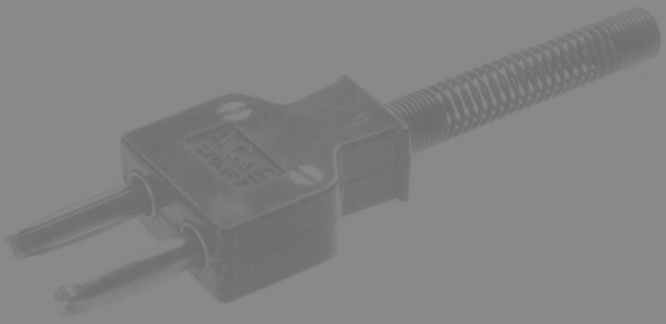

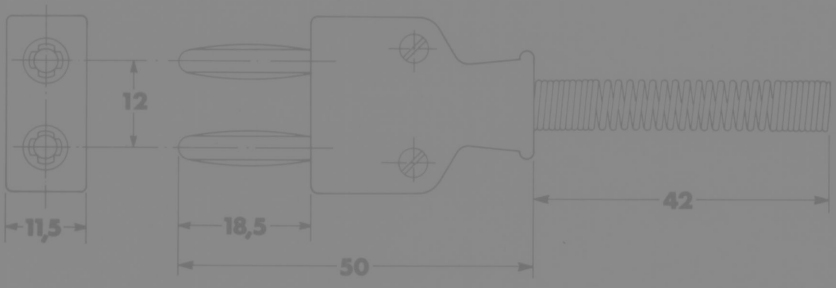

TYPE	COLOUR	SER/ITEM
2001	Black	236/856
2002	Red	N/S
2003	White	N/S
2004	Grey	N/S
2005	Blue	N/S
2006	Green	N/S
2007	Yellow	N/S

APPLICATION: *Unshielded Voice Frequency Patch Cords.*

PLUG . . . 2 Pin Banana, 4 mm Diameter
BRIDGING . . . Without Monitoring

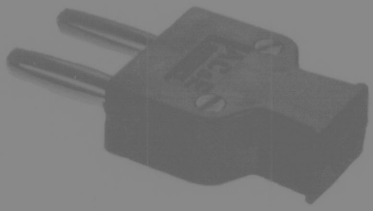

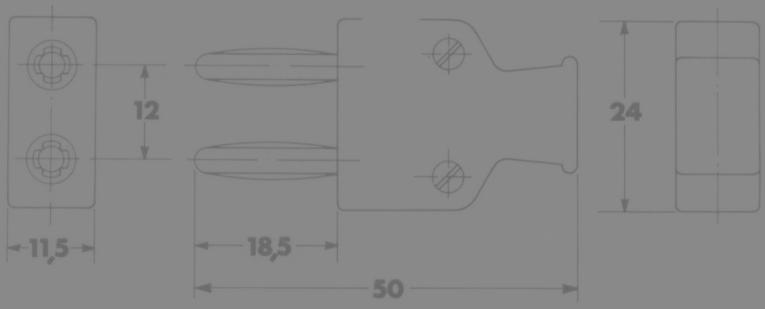

TYPE	COLOUR	SER/ITEM
2011	Black	N/S
2012	Red	N/S
2013	White	N/S
2014	Grey	N/S
2015	Blue	N/S
2016	Green	N/S
2017	Yellow	N/S

Mates with A.C. & E. Patch Panel JS 2

PLUG . . . 2 Pin Banana, 4 mm Diameter.
BRIDGING . . . With Monitoring.

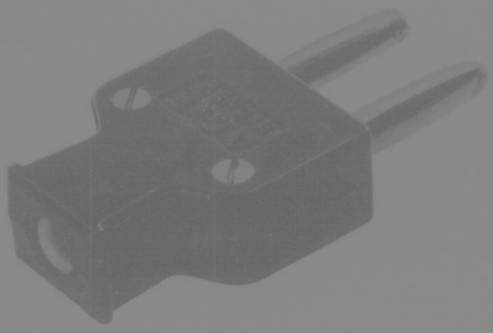

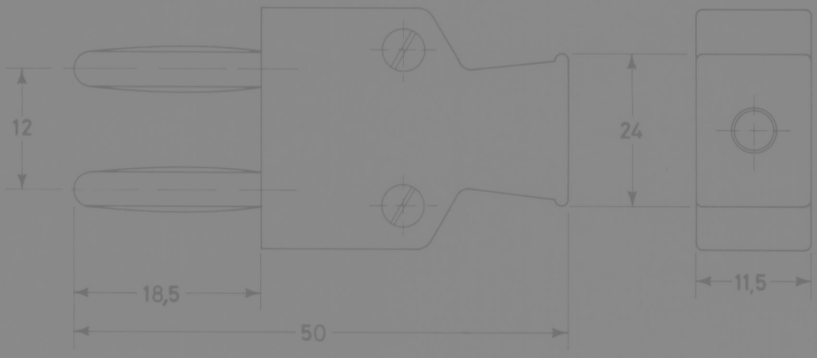

TYPE	COLOUR	SER/ITEM
2021	Black	N/S
2022	Red	N/S
2023	White	N/S
2024	Grey	N/S
2025	Blue	N/S
2026	Green	N/S
2027	Yellow	N/S

Mates with A.C. & E. Patch Panel Type JS2

PLUG . . .

2 Pin, Terminating,
4 mm Dia.,
Without Monitoring

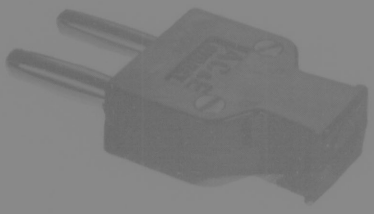

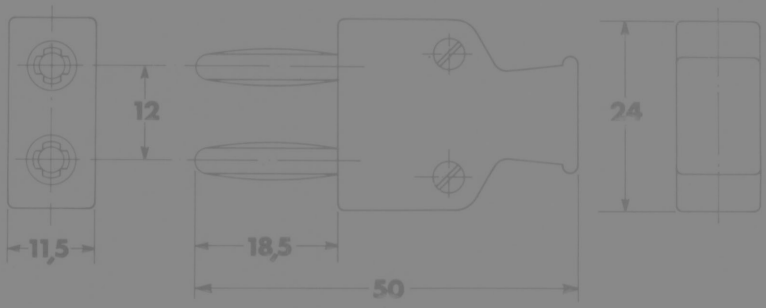

TYPE	TERM	COLOUR
2031		Black
2032	125 ohms	Red
2033	600 ohms	White
2034	75 ohms	Grey
2035	150 ohms	Blue
2036	140 ohms	Green
2037		Yellow

PLUG . . . 3 Pin Banana, 4 mm Diameter.
CORD CONNECTING

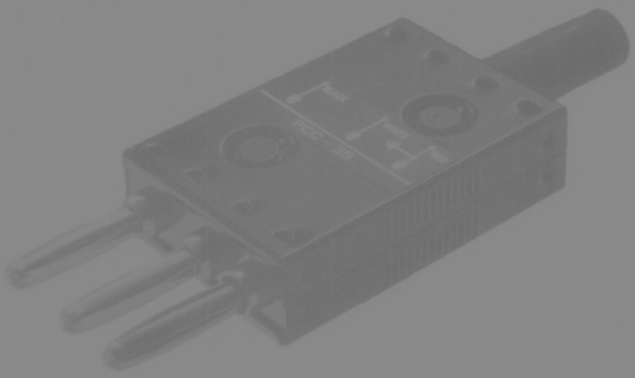

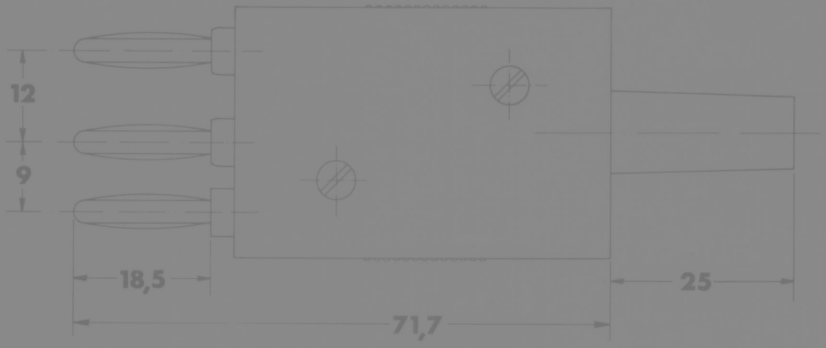

TYPE	COLOUR	SER/ITEM
3001	Black	236/857
3002	Red	
3003	White	
3004	Grey	

APPLICATION: *Shielded Balanced V.F. and C.F. Patch Cords*

PLUG . . . 3 Pin Banana, 4 mm dia.

SHORTING . . .

PLUG
TERMINATING

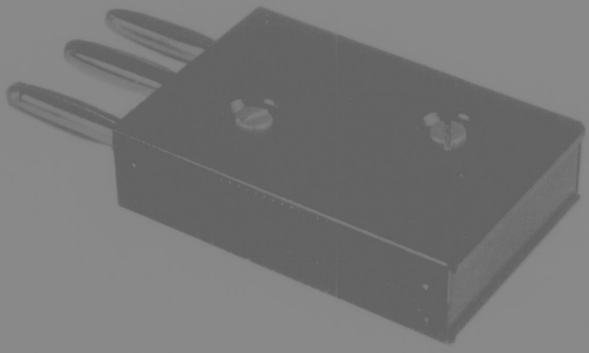

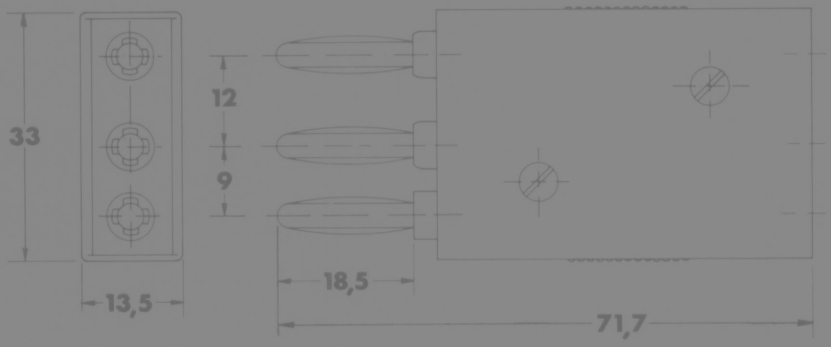

	SHORTING	TERMINATING
Type:	3011	3012
Colour:	Black	(Specify Resistence)

PLUG . . . 3 Pin Banana, 4 mm Diameter.

TERMINATING WITH MONITORING

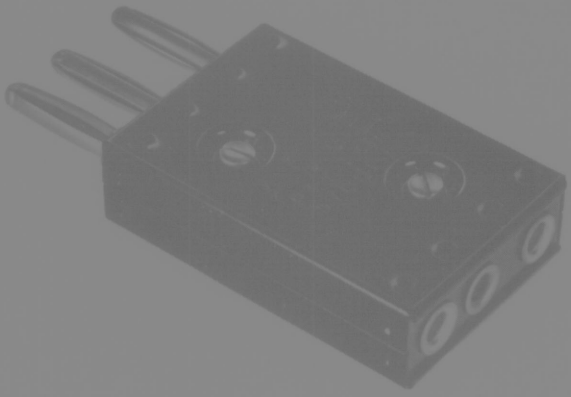

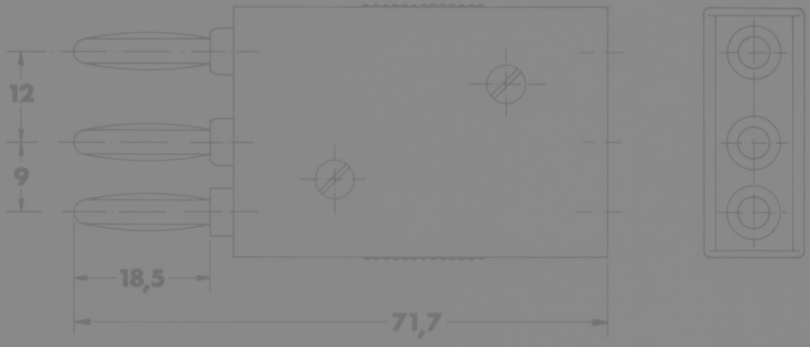

TYPE	TERM	COLOUR	SER/ITEM
3021	–	Black	N/S
3022	125 ohm	Black	N/S
3023	600 ohm	Black	236/1272
3024	75 ohm	Black	236/1270
3025	150 ohm	Black	236/1271
3026	135 ohm	Black	N/S
3027	–	Black	N/S

APPLICATION: *V.F. and C.F. Termination*

PLUG ATTENUATOR

3 Pin Banana, 4 mm Diameter.

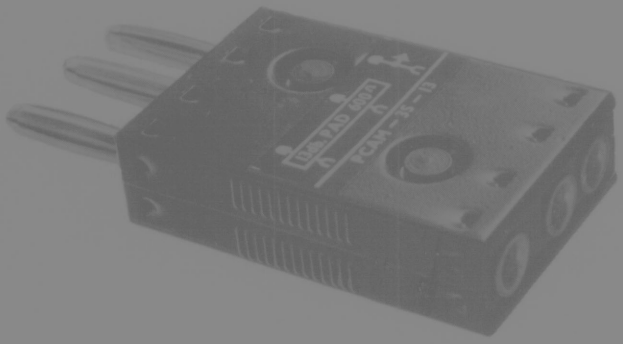

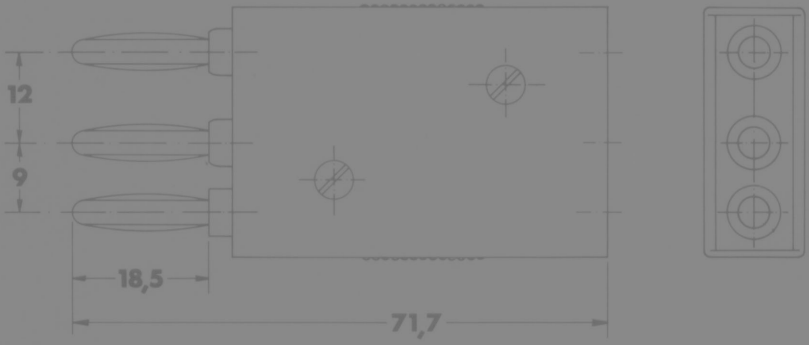

TYPE	TERM	COLOUR
3031	–	Black
3032	4db	Red
3033	13db	White
3034	17db	Grey

APPLICATION: *Attenuator with through access at rear. 600 ohm impedance – "H" type pad on P.C. board*

PLUG BRIDGING WITH MONITORING

4 Pin Banana, 4 mm Diameter.

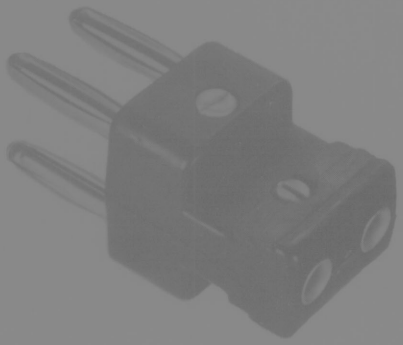

TYPE	COLOUR	SER/ITEM
4041	Black	236/752
4042	Red	N/S
4043	White	N/S
4044	Grey	N/S
4045	Blue	N/S
4046	Green	N/S
4047	Yellow	N/S

Mates with A.C. & E. Patch Panel Type JS 2

PLUG . . . 6 Pin Banana, 4 mm Dia.,

BRIDGING . . . **without** Monitoring

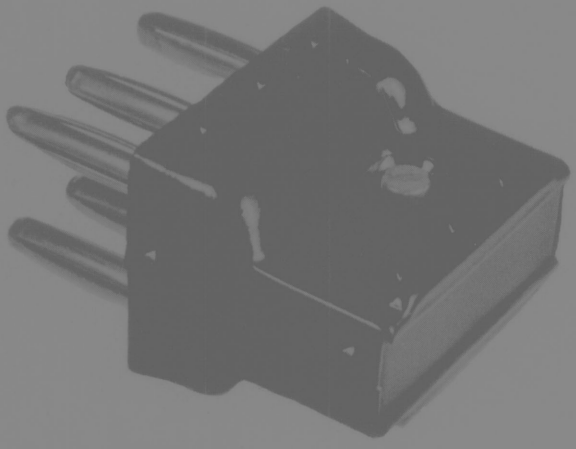

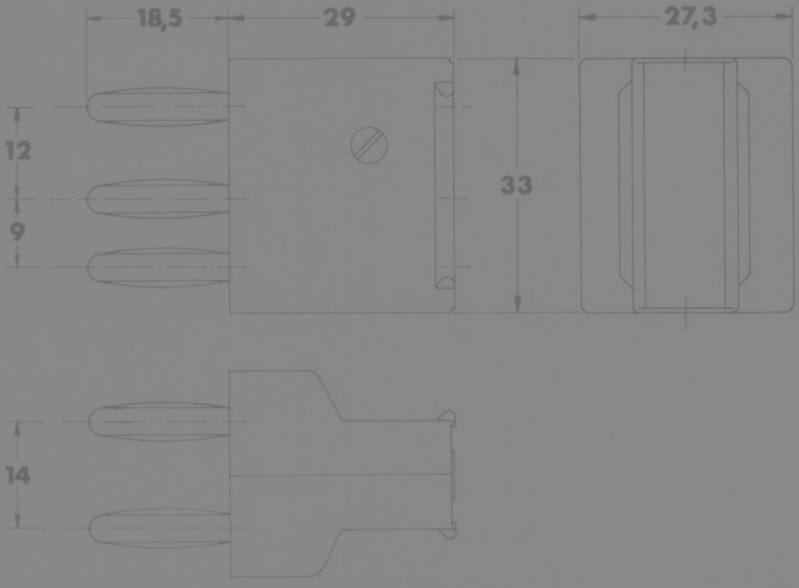

Colour: Black

Type: 6041

PLUG BRIDGING WITH MONITORING

6 Pin Banana, 4 mm Diameter.

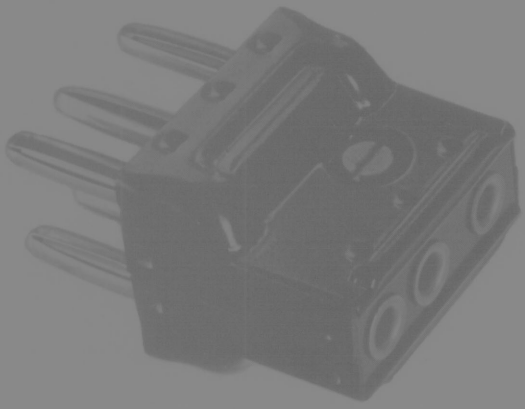

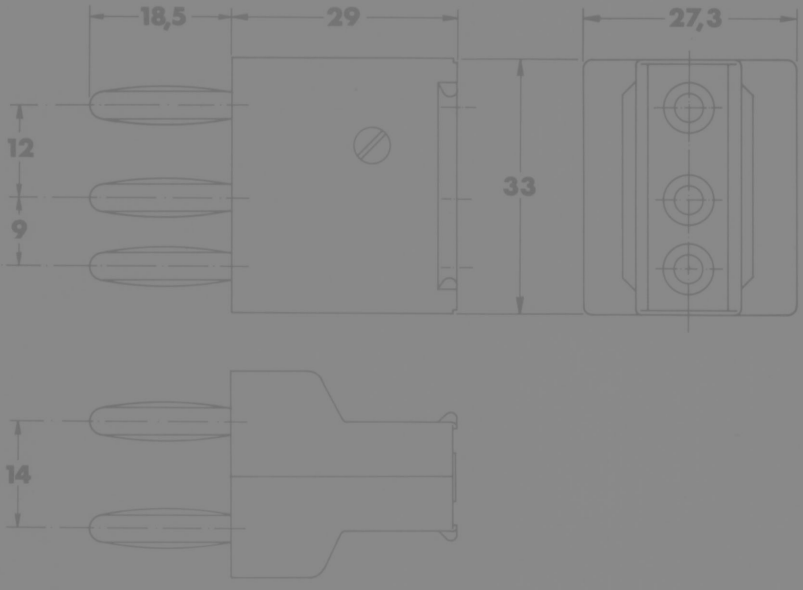

TYPE	COLOUR	SER/ITEM
6051	Black	236/754
6052	Red	N/S
6053	White	N/S

Mates with A.C. & E. Patch Panel Type JS3

PLUG . . .

6 Pin, Bridging 4 mm Dia.,
with Monitoring

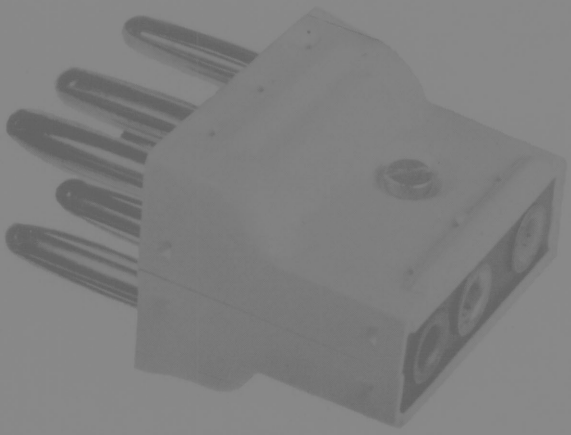

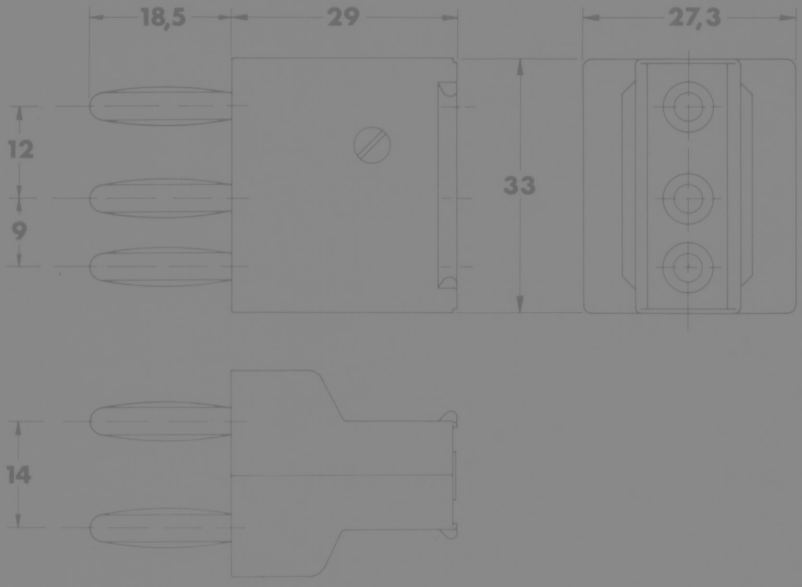

Type: 6063

Colour: White

Including 20db isolation between and monitoring access

SOCKET

2 Pole, 4 mm Dia.



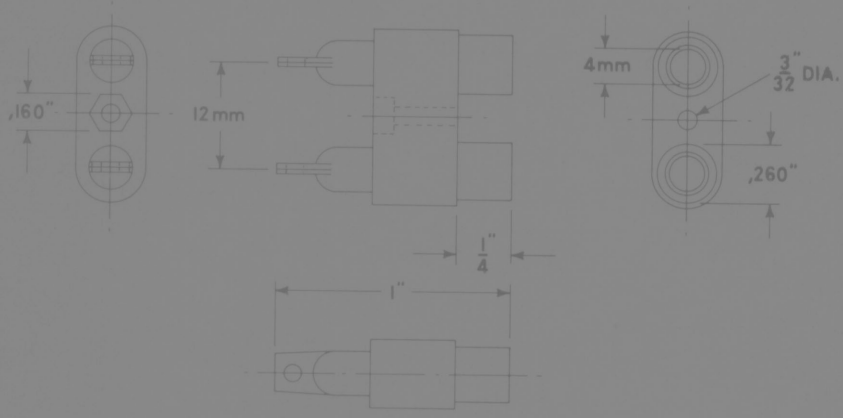

TYPE	COLOUR
2091	Black
2092	Red

SOCKET . . . 3 Pole, 4mm dia.

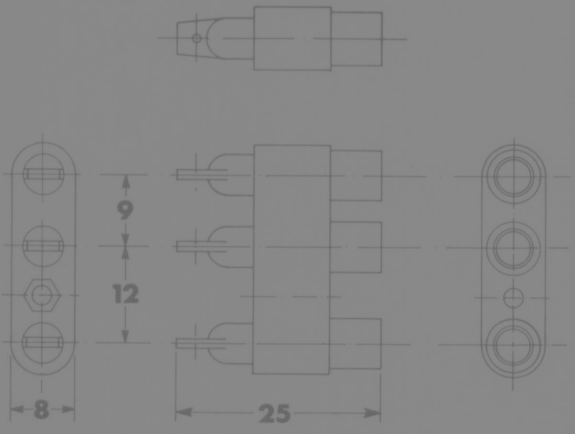

TYPE	COLOUR
3081	Black
3082	Red
3084	Grey

SOCKET . . .

4 Pole, 4mm dia.
12mm x 12mm Centres



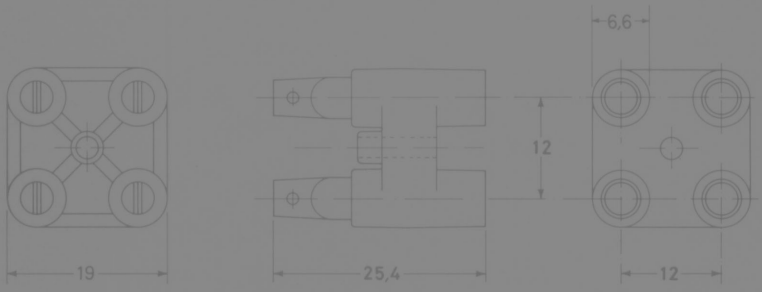

TYPE	COLOUR
4001	Black
4002	Red

SOCKET . . .

4 Pole, 4mm dia.
12mm x 14mm Centres



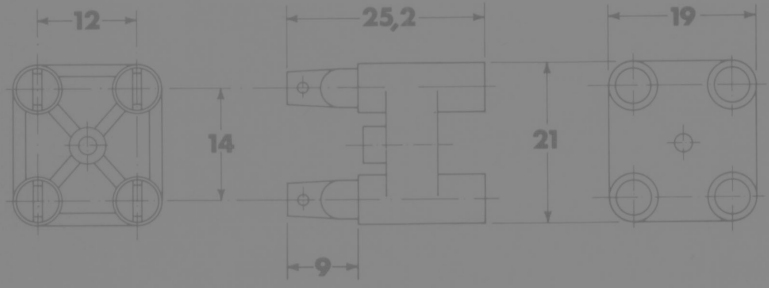

TYPE	COLOUR
4021	Black
4022	Red