


H.F. CO-AXIAL ANGLE PLUG



Type:	HSV/W 13/9
Ordering Number:	611
Design:	H.F. Co-axial Angle Plug, 4/13, with 4mm centre contact, shrouded, for 9mm cable entry.
Body:	Nickel-plated brass
Contacts:	Silver-plated
Insulation Resistance:	$> 10^{13}$ ohms
Breakdown:	3kV
Capacity at 800 Hz:	< 2.5 pF
Insulation:	Polycarbonate or Teflon

H.F. CO-AXIAL COUPLING

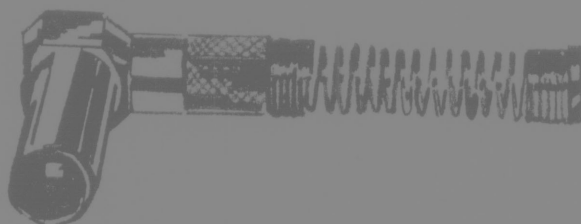

Type:	HK 13	Ordering Nr.:	636
Type:	HKV 13	Ordering Nr.:	636/V
Design:	For H.F. 4/13 Co-axial Plug with exposed 4mm banana pin centre conductor (HK 13/636)		
	For H.F. 4/13 Co-axial Plug with shrouded 4mm banana pin centre conductor (HKV 13/636V)		
Body:	Nickel-plated brass		
Contacts:	Silver-plated		
Insulation Resistance:	$> 10^{12}$ ohms		
Breakdown:	3kV		
Capacity at 800 Hz:	$< 3\text{pF}$		
Insulation:	Polycarbonate or Teflon		