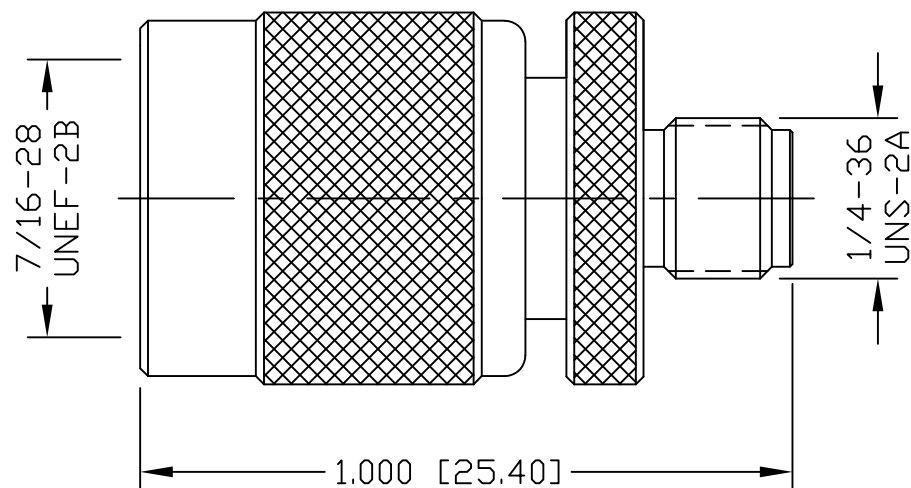


PART NO.

RSA-3472

REV	DESCRIPTION	DWN	DATE	APPROVED
A	UPDATED DWG FORMAT AND SPECS	CZS	12/23/20	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

INTERFACE: Per MIL-STD-348

FREQUENCY RANGE: 0-11 GHz

VSWR:

0-5 GHz <1:1.1

5-9 GHz <1:1.3

9-12 GHz <1:1.45

INSERTION LOSS: -0.1 dB Max 0-7 GHz

WORKING VOLTAGE: 375 VRMS @ sea level

TEMPERATURE RANGE: -65°C TO 85°C

INSULATION RESISTANCE: 5000 MΩ min.

RF LEAKAGE: N/A

RF HIGH POTENTIAL: 1k VRMS @ 5~7.5 MHz

CONNECTOR DURABILITY: 500 Cycles Min.

CONNECTOR REPEATABILITY: IL < -0.1 dB

1	SHELL	1	BRASS	NICKEL
2	BODY	1	BRASS	NICKEL
3	INSULATOR	1	PTFE	NATURAL
4	PIN/CONTACT	1	PHOSPHOR BRONZE	GOLD
5	GASKET	1	SILICONE	RED
6	RETAINING RING	1	BRASS	NICKEL
7	BUSHING	1	DELTRIN	WHITE
8	WASHER	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUÑIGA 12/23/20

CHECKED

ORJ DRAWN
JDM 11/06/03**RoHS**
COMPLIANT

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.**RFconnectors**
DIVISION OF RF INDUSTRIES, LTD.RFINDUSTRIES.COM
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX**TNC PLUG TO SMA JACK**
ADAPTER

CABLE GROUP N/A	DWG # RSA-3472	REVISION A
FORMAT A	SCALE NTS	CONTROL # 000000
SHEET 1 OF 1		