


F
E
D
C
B
A

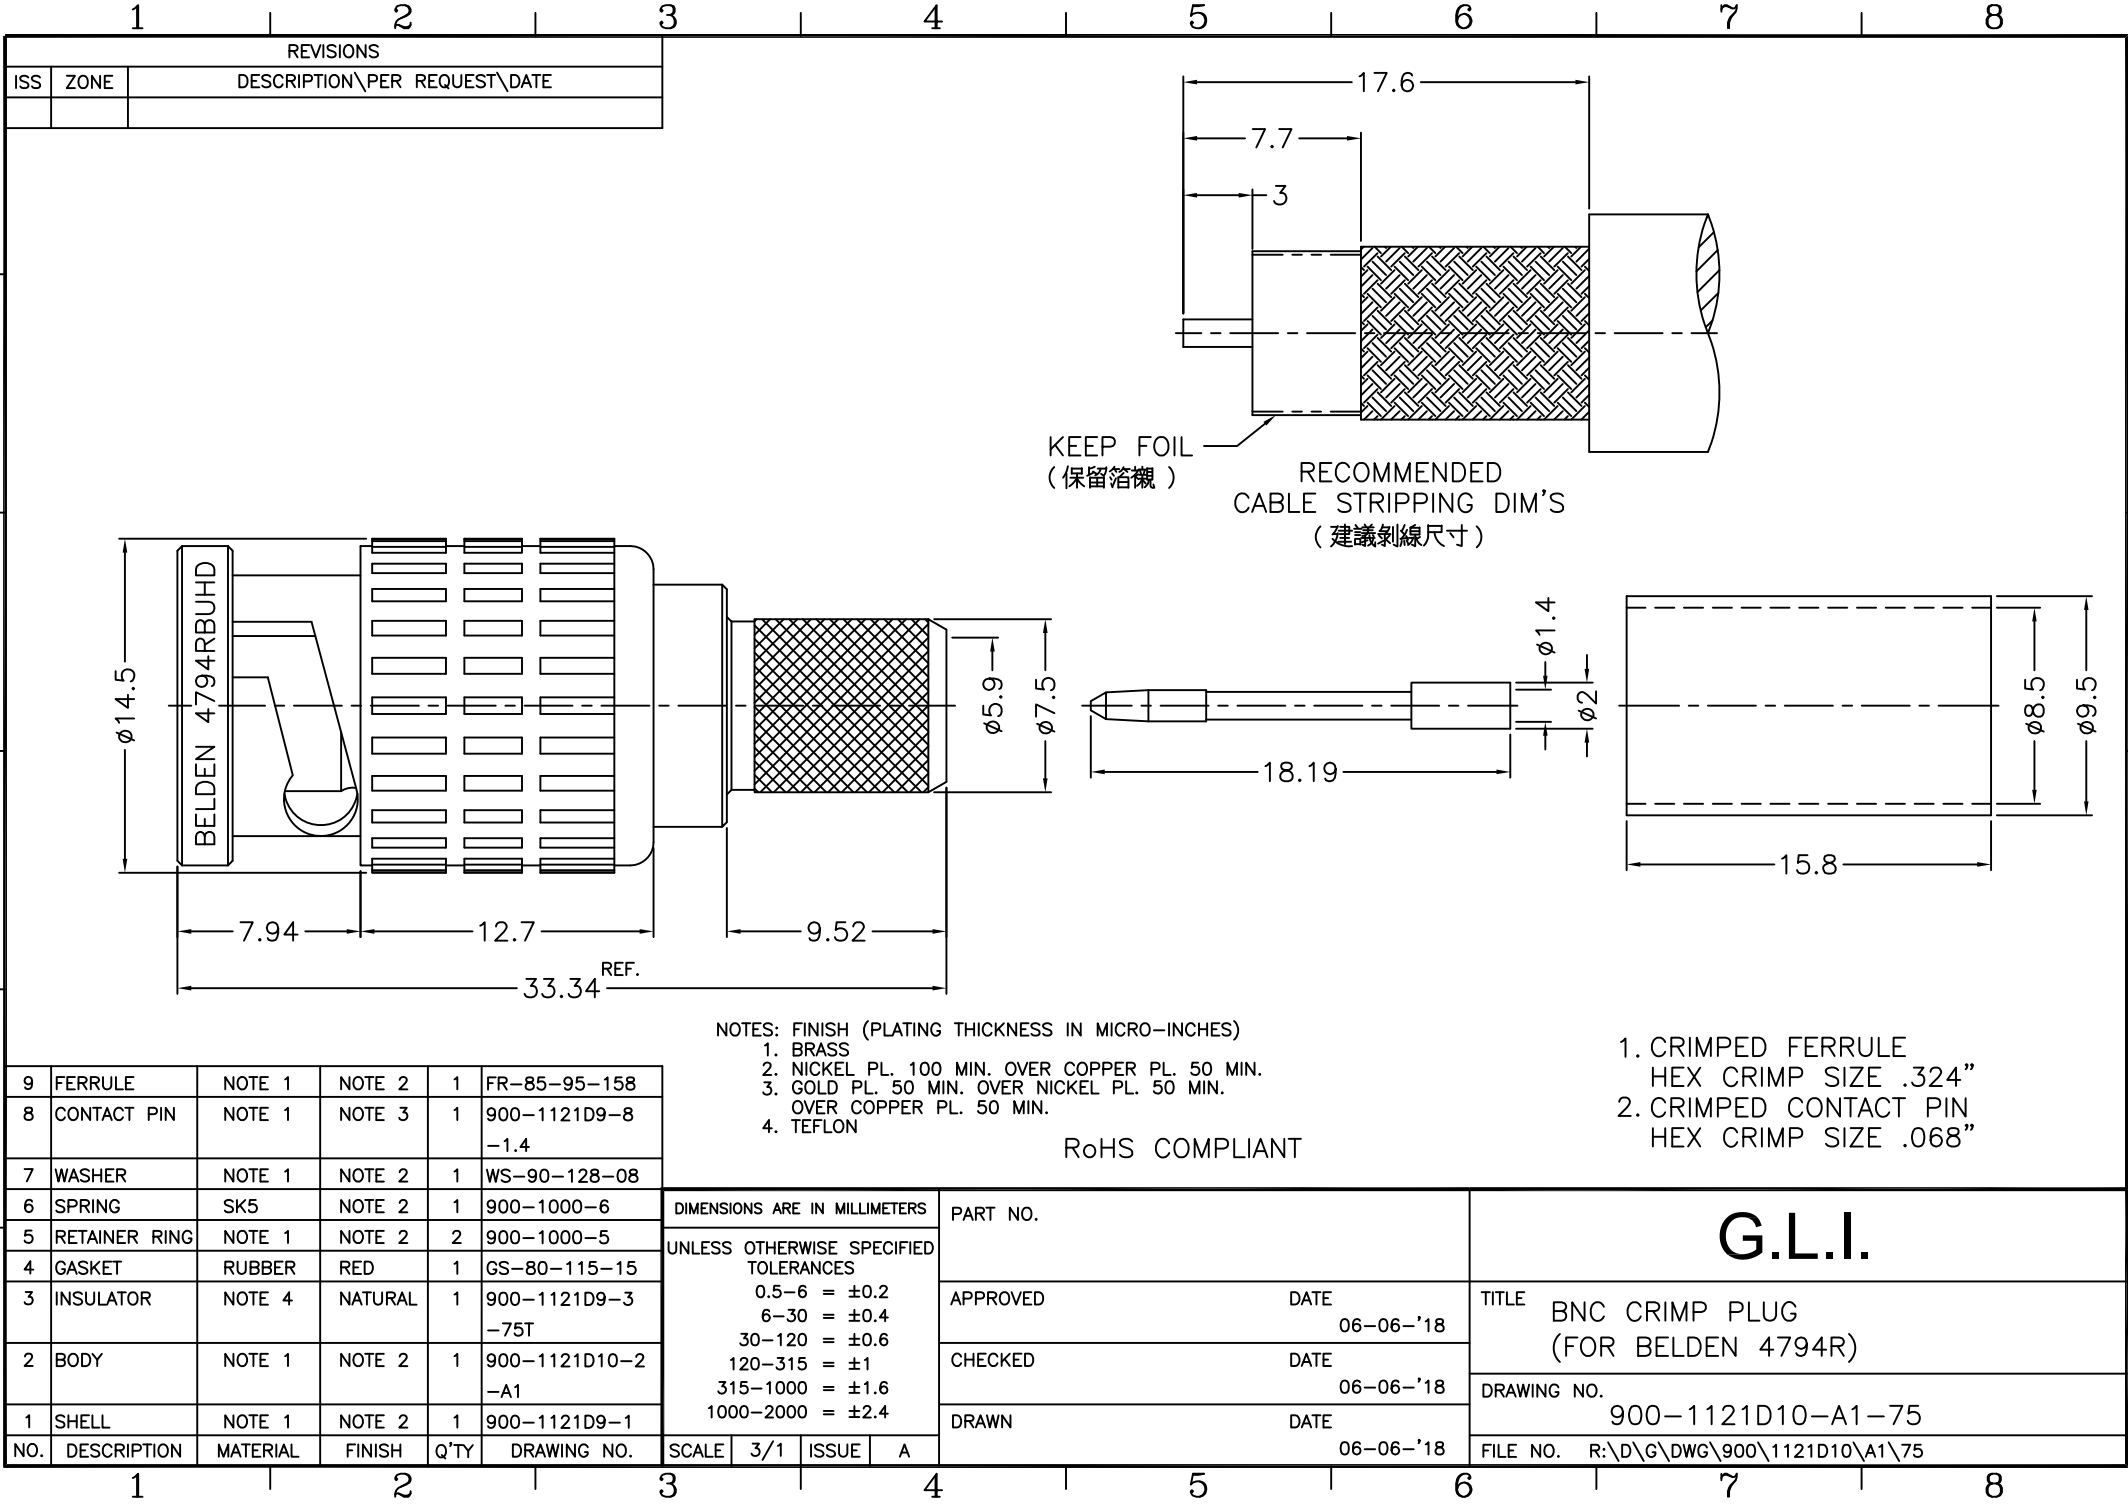

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
- 3. GOLD PL. 50 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
- 4. TEFLON

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
- 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RoHS COMPLIANT

9	FERRULE	NOTE 1	NOTE 2	1	FR-85-95-158
8	CONTACT PIN	NOTE 1	NOTE 3	1	900-1121D9-8 -1.4
7	WASHER	NOTE 1	NOTE 2	1	WS-90-128-08
6	SPRING	SK5	NOTE 2	1	900-1000-6
5	RETAINER RING	NOTE 1	NOTE 2	2	900-1000-5
4	GASKET	RUBBER	RED	1	GS-80-115-15
3	INSULATOR	NOTE 4	NATURAL	1	900-1121D9-3 -75T
2	BODY	NOTE 1	NOTE 2	1	900-1121D10-2 -A1
1	SHELL	NOTE 1	NOTE 2	1	900-1121D9-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE 06-06-'18		
				CHECKED	DATE 06-06-'18		
				DRAWN	DATE 06-06-'18		
				TITLE BNC CRIMP PLUG (FOR BELDEN 4794R)		DRAWING NO. 900-1121D10-A1-75	
SCALE 3/1 ISSUE A				FILE NO. R:\D\G\DWG\900\1121D10\A1\75			