


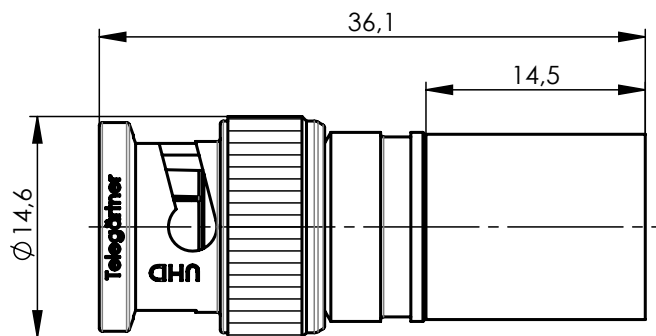

Mechanical characteristics

cables

interface dimensions acc. to
assembly code
centre conductor
outer conductor
mating life

Components

centre contact
outer contact
other metal parts
crimp ferrule
insulator
gasket

Electrical characteristics

impedance
return loss

working voltage
voltage proof
insulation resistance
contact resistance
centre contact
outer contact

Environmental

operating temp.
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach
Montageanleitung
Innenleiter
Außenleiter
Steckzyklen

Bauteile

Innenkontakt
Außenkontakt
sonstige Metallteile
Crimprohr
Isolierung
Dichtung

Elektrische Eigenschaften

Wellenwiderstand
Rückflussdämpfung

Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur
RoHS konform

cable group / Kabelgruppe G48 only/nur : (a)
4731R Belden, VK 90 SILVER+ Percon

IEC 61169-63
A3312 (a)
Crimp
Crimp
>500

Materials / Material

CuZn39Pb3
CuZn39Pb3
GD-ZnAl4Cu1
SF Cu w
PTFE modified red / modifiziert rot
NBR

Finish / Oberfläche

Cu1Ni2Au0,8
Cu2Ni5
Zn/Cu6Ni6
Ni5
(a)


75 Ω
typ.: 1 GHz - 36 dB; 4 GHz - 29 dB;
8 GHz - 29 dB; 12 GHz - 22 dB


≤ 0,5 kV_{eff} / 50 Hz
1,5 kV_{eff} / 50 Hz
≥ 5 GΩ

≤ 20 mΩ
≤ 5 mΩ

-30°C / +75°C
2011/65/EU

M 1:1



Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name		Datum/ date	Name/ name	Gewicht/ weight [g]		
			gez./ drawn		21.06.2018	BJ			
			gepr./ appr.		21.06.2018	KL	ca./approx. 15,4		
			Maßstab/ scale 2:1 (1:1)	Benennung/ title BNC Straight Plug UHD 8k 12 GHz BNC-Kabelstecker UHD					
			untol. Maße/ dim. without tolerances according to	Untert./ doc. type K	Zeichnungsnr./ drawing no. J01002A0089				 Maße/ dimensions: mm Original : DIN A4 Blatt/ sheet 1 von/ of 1
				Ersatz für/ replaces	EWB80079-00				
a	29753	12.07.2018	BJ						