


Connector Dimensions

MSW3106, Class B

Straight plug and split endbell

Wire soldering and maintenance
simplified with a split type endbell

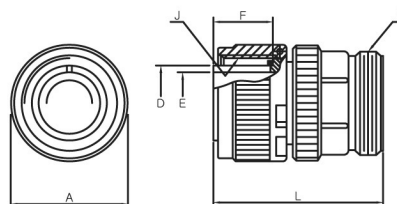


Shell size	ϕA max	ϕD -0.38	ϕE min	F ± 0.13	L max	J THD-2B	K THD-2A
14s	29.36	17.15	13.36	13.49	42.88	7/8-20UNEF	3/4-20UNEF
16	31.75	20.45	16.54	18.26	52.37	1 -20UNEF	7/8-20UNEF
18	34.14	23.62	19.71	18.26	52.37	1 1/8-18UNEF	1 -20UNEF
20	37.31	26.67	23.67	18.26	55.58	1 1/4-18UNEF	1 3/16-18UNEF
22	40.49	29.85	26.06	18.26	55.58	1 3/8-18UNEF	1 3/16-18UNEF
24	43.66	33.02	29.24	18.26	58.72	1 1/2-18UNEF	1 7/16-18UNEF
28	50.01	38.61	34.80	18.26	58.72	1 3/4-18UNS	1 7/16-18UNEF
32	56.36	44.96	41.15	18.26	61.93	2 -18UNS	1 3/4-18UNS
36	62.71	50.29	46.69	18.26	61.93	2 1/4-16UN	2 -18UNS

MSW3108, Class B

90° Angle plug and split endbell

Convenient for use in
narrow places

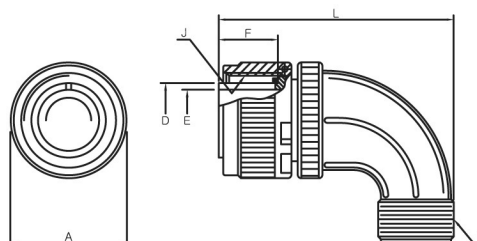

Shell size	ϕA max	ϕD -0.38	ϕE min	F ± 0.13	L max	J THD-2B	K THD-2A
14s	29.36	17.15	13.36	13.49	53.98	7/8-20UNEF	3/4-20UNEF
16	31.75	20.45	16.54	18.26	65.07	1 -20UNEF	7/8-20UNEF
18	34.14	23.62	19.71	18.26	68.28	1 1/8-18UNEF	1 -20UNEF
20	37.31	26.67	23.67	18.26	76.99	1 1/4-18UNEF	1 3/16-18UNEF
22	40.49	29.85	26.06	18.26	76.99	1 3/8-18UNEF	1 3/16-18UNEF
24	43.66	33.02	29.24	18.26	86.51	1 1/2-18UNEF	1 7/16-18UNEF
28	50.01	38.61	34.80	18.26	86.51	1 3/4-18UNS	1 7/16-18UNEF
32	56.36	44.96	41.15	18.26	95.25	2 -18UNS	1 3/4-18UNS
36	62.71	50.29	46.69	18.26	100.03	2 1/4-16UN	2 -18UNS