

L1001/1 Terminal



This terminal incorporates a non-rotating centre disc in the head for lettering. The rotating collar is captive and the clamping gap is free from thread. When used with Panel fittings 01 this terminal is panel sealed.

Current rating: 15 A

Temperature range: -25 °C to +70 °C

Materials: Head, phenolic resin

Disc, tenite butyrate

Stem, brass, nickel-

plated

Colours head: Black

disc: Black, red


(Terminals and fittings are supplied as unassembled and must be ordered as individual items.)

Ordering reference:
L1001/1/Colour
Fixing Kit 3
Panel fittings (see below and opposite)

Fixing kit 3

Comprises:

Metal washer
Non-rotating washer
2 locknuts (2 BA)

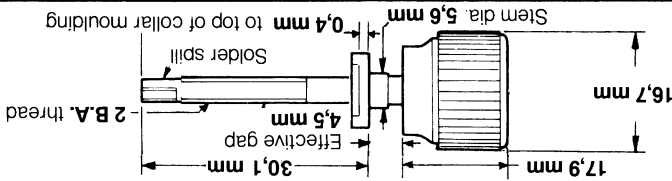

B panel fittings

Comprises:

Phenolic resin
moulding, SRBP
insulating washer

Breakdown


voltage: 3 kVd.c.

Insulation

resistance: $\geq 10^3$ megohms

Temperature

range: -40 °C to +85 °C (ambient)



Fixing torque: 1.41 Nm

Colour: Black