

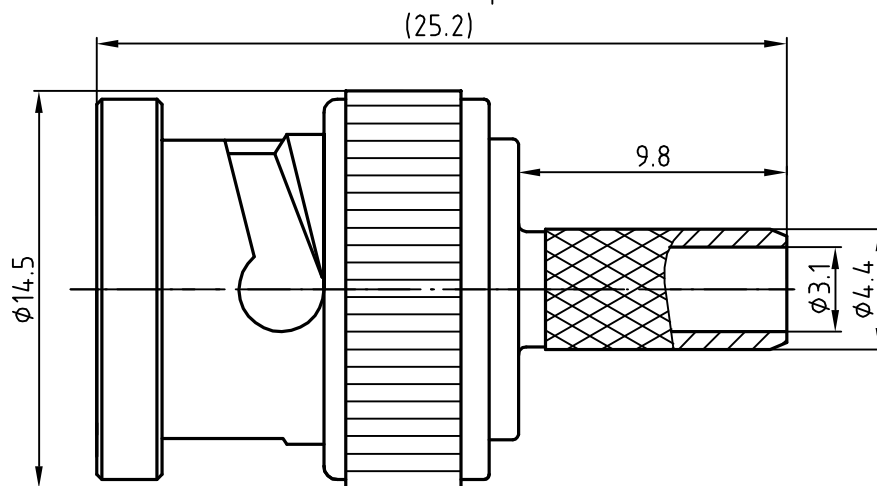


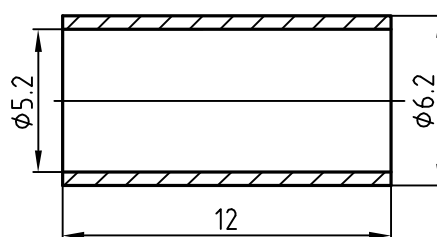

RECOMMENDED CABLE STRIPPING DIMENSIONS

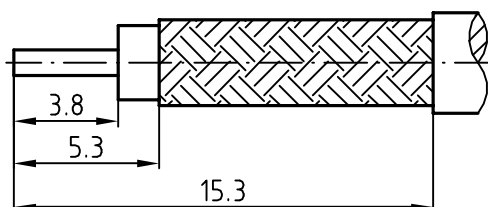

The connector interface meets MIL-STD-348.

Electrical Characteristics

Characteristic impedance : 50Ω;

Working voltage : 500V

Frequency range : DC-4GHz;

Dielectric withstanding voltage : 1500V

Contact resistance: Center contact: ≤1.5mΩ

Outer contact: ≤1mΩ

Insulation resistance: ≥5000MΩ


VSWR : ≤ 1.3 (DC-3GHz)

Match cable: RG58


Center contact: Soldered

Outer contact: Crimp

Center contact

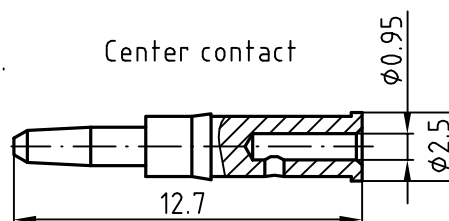

Crimping hex for the ferrule



4	Crimp ferrules	Copper alloy	Nickel	1	
3	Body	Brass	CuSnZn	1	
2	Insulators	PTFE		1	
1	Center contact	Phosphor bronze	Gold	1	
NO.	Title/Name	Material	Finish	QTY	Remark

Customer code

Customer part NO.

Amphenol CNT

Unless otherwise specified tolerance

X.XX±0.1

X±0.3

Designed

Date

J-0018

2009.04.28

Checked

Date

J-0002

2009.04.29

Part NO.

BNC(SJ)-J5Y-2

Drawing NO.

BNC.1112022/R/1



Rev.

V1.0

Scale

Sheet

1/1

Notice:

This document is the property of Amphenol CNT, reproduction or disclosure is forbidden unless authorized by Amphenol CNT.