
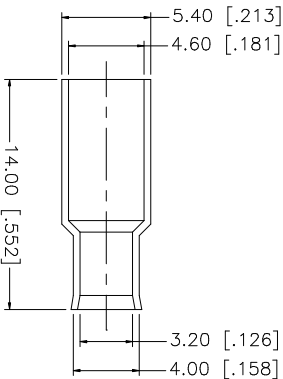
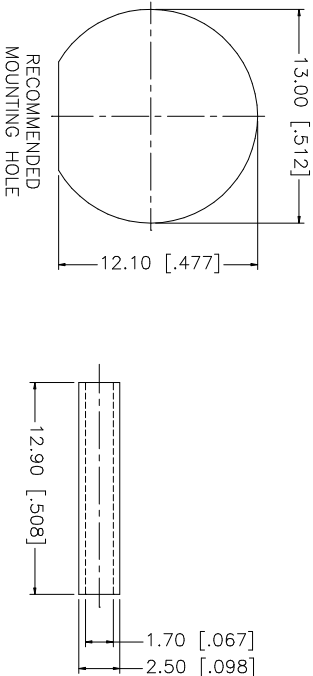
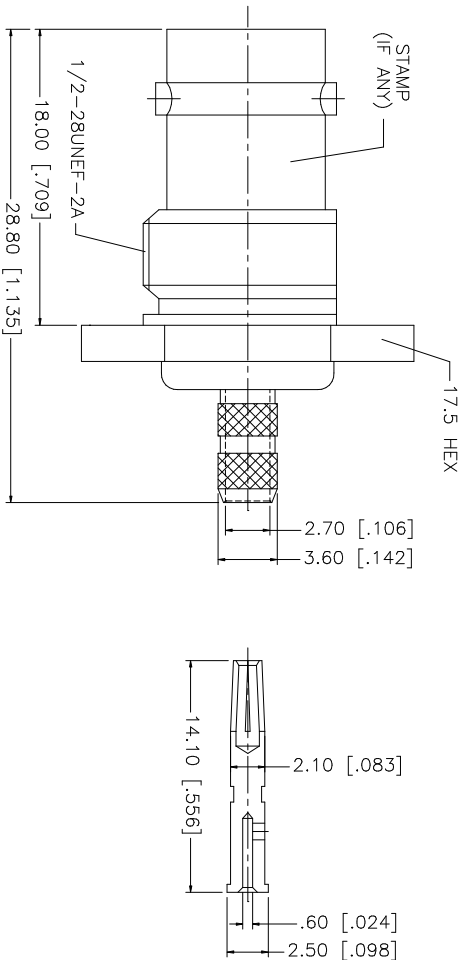
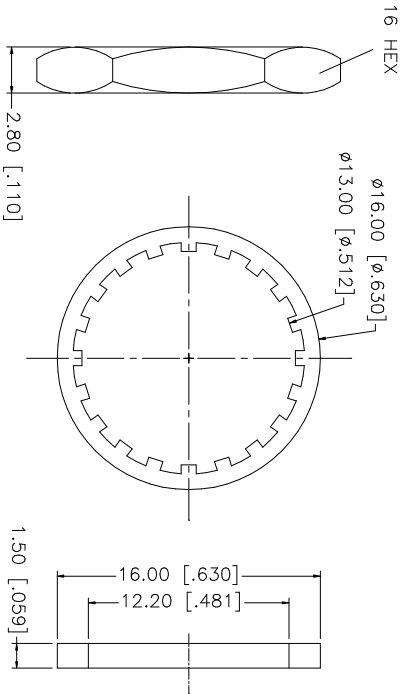


REV.	DATE	DESCRIPTION
A	01/10/04	UPDATE DRAWING FORMAT

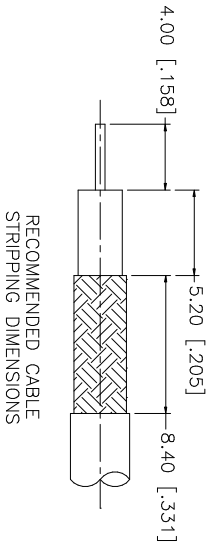

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .187"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
 3. MAX. PANEL THICKNESS = 3.5mm

Amphenol Connex											
PART DESCRIPTION											
BNC BULKHEAD CRIMP JACK FOR 316 DOUBLE BRAID											
PART NO. 112517											
DWG. NO. 112517.DWG											
REV. NC											
SIZE A											
SCALE NA											
APPROVALS		DATE									
DRAWN G.R.S.		01/10/04									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.											
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:											
0.5 - 8mm ± 0.20mm											
8 - 30mm ± 0.40mm											
30 - 120mm ± 0.50mm											
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:											
.020 - .315 = ± 0.007"											
.315 - 1.180 = ± 0.015"											
1.180 - 4.724 = ± 0.020"											
DO NOT SCALE DRAWING		CAD FILE C:/112/112517.DWG									
QTY											
FINISH											
MATERIAL											
DESCRIPTION											
1 BODY		BRASS NICKEL 1									
2 INSULATOR		DELIRIN NATURAL 1									
3 CONTACT PIN		PHOS. BRONZE GOLD 1									
4 GASKET		RUBBER RED 1									
5 LOCK WASHER		BRASS NICKEL 1									
6 HEX NUT		BRASS NICKEL 1									
7 SLEEVE		DELIRIN NATURAL 1									
8 FERRULE		BRASS NICKEL 1									