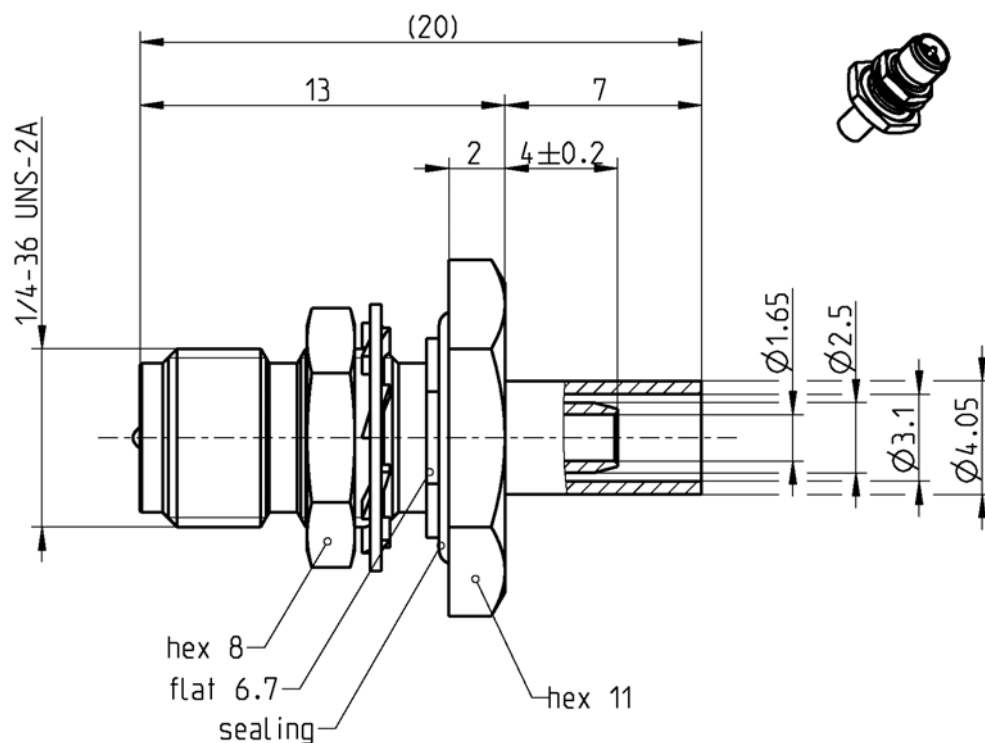


Reverse
SMA

BULKHEAD JACK
REVERSE POLARITY

32RK647-302L5

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Derived from
Compliant with

Rosenberger 32RK000-000, series reverse SMA
IEC 60169-15; EN 122110; MIL-STD-348A, Fig. 310
FCC standard (part 15; section 15.203)

Documents

Assembly instruction
Panel piercing

32 B21
B 57

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric
Gasket
Crimping ferrule

Material

CuBe
Brass
Brass
PTFE
Silicone
Copper

Plating

AuroDur, gold plated
AuroDur, gold plated
AuroDur, gold plated

AuroDur, gold plated

TECHNICAL DATA SHEET

Rosenberger®

Reverse SMA BULKHEAD JACK
REVERSE POLARITY

32RK647-302L5

Electrical data

Impedance	50 Ω
Frequency	DC to 12.4 GHz
VSWR	$\leq 1.05 + 0.01 \times f \text{ [GHz]}$
Insertion loss	$\leq 0.05 \times \sqrt{f \text{ (GHz)}} \text{ dB}$
Insulation resistance	$\geq 5 \times 10^3 \text{ M}\Omega$
Center contact resistance	$\leq 3 \text{ m}\Omega$
Outer contact resistance	$\leq 2 \text{ m}\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	$\leq 200 \text{ W @ 2 GHz}$
RF-leakage	$\geq 100 \text{ dB up to 1 GHz}$

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	min. 100
Center contact captivation: axial	$\geq 27 \text{ N}$
Coupling test torque	max. 0.6 Nm
Recommended torque	0.5 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
2002/95/EC (RoHS)	compliant

Tooling

Crimping tool	11W150-000
Crimp insert	11W150-102

Suitable cables

RG 174 A/U, RG 188 A/U, RG 316 /U

Packing

Standard	100 pcs in bag
Weight	3.9 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Rong Fang	06/04/05	Schwangler	22.10.07	d00	07-0260	S. Mühlbacher	19/10/07

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
Fax: +49 8684 18-499
email: info@rosenberger.de

Page
2 / 2