
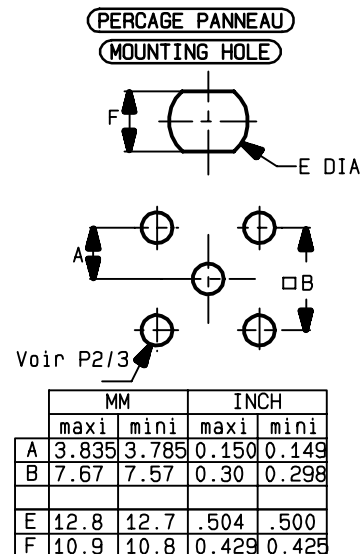


RIGHT ANGLE JACK RECEPTACLE FOR PCB BULKHEAD - PRESS-FIT LEGS

R141.684.130

SERIES BNC

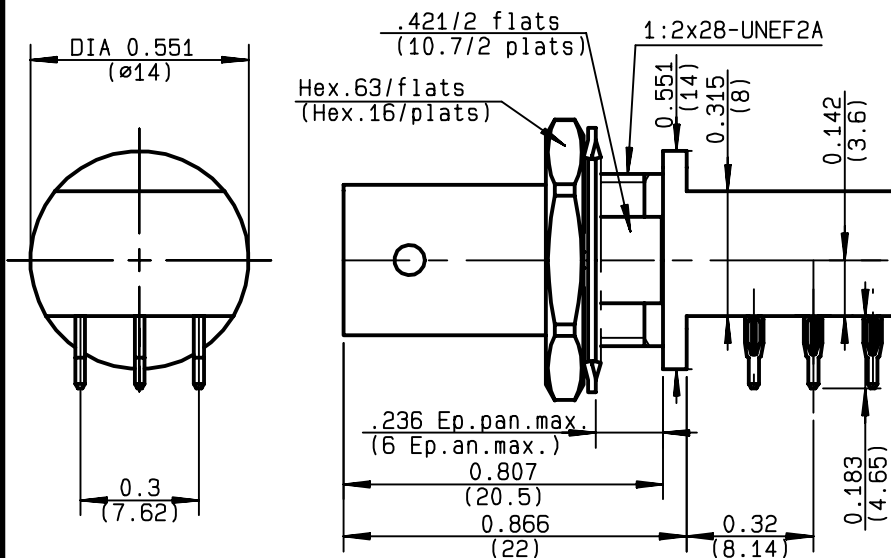

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-4	GHz
TEMPERATURE RATING	-65/+165	$^{\circ}\text{C}$
V.S.W.R	1.06* + .006 x F(GHz)Maxi	
RF INSERTION LOSS	.025* $\sqrt{F}$ (GHz) dB Maxi	
VOLTAGE RATING	500	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1500	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT		gr
SPECIFICATION		

CABLES :

OTHERS CHARACTERISTICS

* Coaxial Transmission Line Only

CABLE RETENTION	NA	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	18	N Mini
Axial force - opposite end	18	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	370	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	NICKEL 2	
OUTER CONTACT			
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES	PHOSPHOR BRONZE	TIN LEAD OVER NICKEL	

ISSUE
9913A01

CREATION DATE
22/02/1996

FILE PART-NUMBER
95-0132-034



RADIALL®

The information given here is subject to change without notice.
Design changes may be in order to improve the product.

Connect to the future