


BNC Coaxial Connector Dimensions

Interface Dimensions :

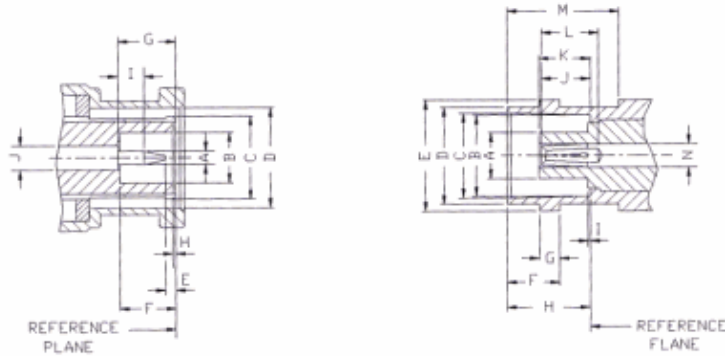

PLUG

Letter	Millimeters (Inches)	
	Minimum	Maximum
A	1.32(.052)	1.37(.054)
B	4.83(.190)	
C	SLOTTED AND FLARED TO MEET ELECTRICAL AND MECHANICAL REQUIREMENTS	
D	9.78(.385)	9.91(.390)
E	0.08(.003)	
F	5.28(.208)	5.79(.228)
G	5.33(.210)	5.84(.230)
H	0.15(.006)	
I	1.98(.078)	
J	2.06(.081)	2.21(.087)

JACK

Letter	Millimeters (Inches)	
	Minimum	Maximum
A		4.72(.186)
B	8.10(.319)	8.15(.321)
C	8.31(.327)	8.46(.333)
D	9.60(.378)	9.70(.382)
E	10.97(.432)	11.07(.436)
F	5.18(.204)	5.28(.208)
G	1.91(.075)	2.06(.081)
H	8.31(.327)	8.51(.335)
I		0.15(.006)
J	4.72(.186)	5.23(.206)
K	4.78(.188)	5.28(.208)
L	4.95(.195)	
M	10.52(.414)	
N	2.06(.081)	2.21(.087)

[Back](#)