



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-59-482

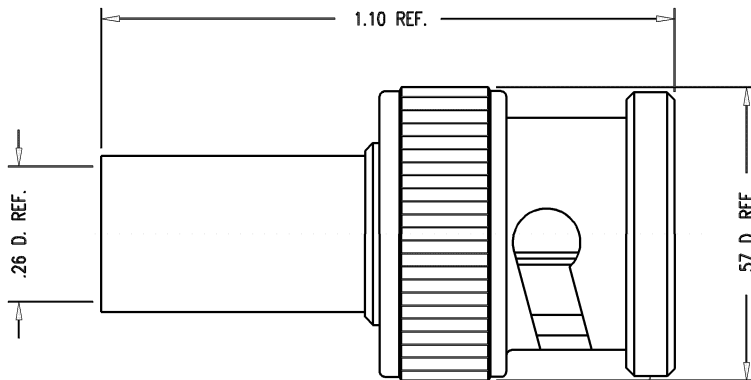

STAMP: KINGS KC-59-482



NOTES:

1. FOR USE WITH BELDEN 9259 CABLE
2. FOR CABLE TRIMMING USE KTJ-57 & KTD-26.
3. FOR CRIMPING USE DIE SIZE 02.
4. FOR CABLING INSTRUCTIONS SEE CP-401.
5. MATERIAL:
 - INSULATOR- TEFLON, L-P-403
 - GASKET- SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE- HARD DRAWN COMMERCIAL BRONZE, ALLOY 220
 - OUTER CONTACT- BERYLLIUM COPPER, QQ-C-530
 - ALL OTHER METAL PARTS- BRASS, QQ-B-626
6. FINISHES:
 - CENTER CONTACT } SILVER PLT. PER QQ-S-365
 - SPRING WASHER }
 - ALL OTHER METAL PARTS- KINGS TARNISH RESISTANT FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE- 50 OHMS
 - FREQUENCY RANGE- DC TO 4 GHz
 - WORKING VOLTAGE- 500 RMS

REVISIONS

ISSUE	CHANGES
3	CN 23087 D MD 23 FEB 82
4	CN 37034 D JJS 06/28/96

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

BNC PLUG

DRAWN JCA	DATE 06/28/96
DESIGN MJB	DATE 06/28/96
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KC-59-482

GSD