


MATERIALS

BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

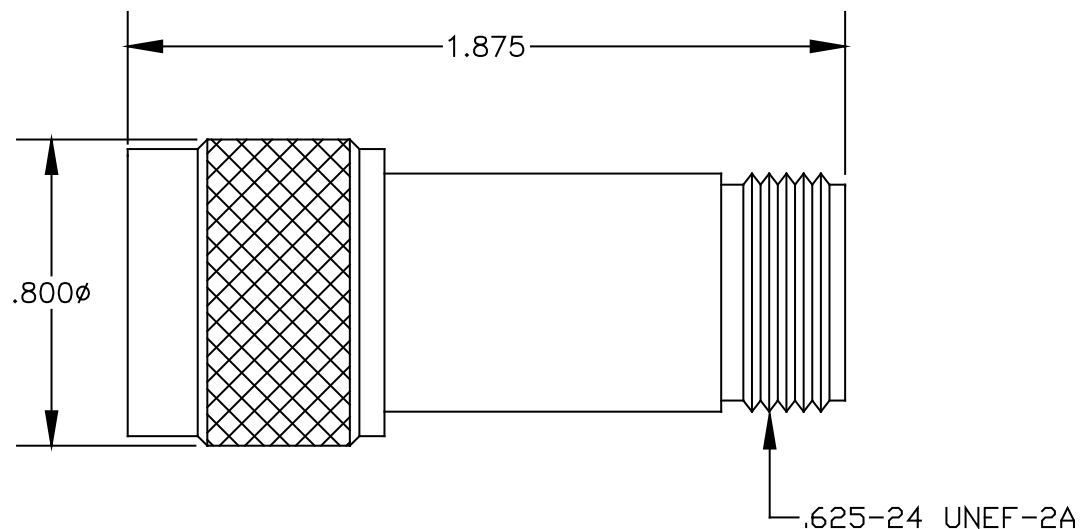

SPECIFICATIONS

FREQUENCY RANGE: DC TO 2 GHz
 ATTENUATION: 10 dB
 IMPEDANCE: 50 OHMS
 ACCURACY: 1,000 MHz, ± 0.6 dB
 2,000 MHz, ± 1 dB
 VSWR: 1,000 MHz, 1.3:1 MAXIMUM
 2,000 MHz, 1.5:1 MAXIMUM
 AVERAGE POWER HANDLING CAPABILITY: 1 WATT



ESTABLISHED 1972

PASTERNAK ENTERPRISES, LLC

P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7002-10

DES. N ATTENUATOR, MALE TO FEMALE,
 FREQUENCY RANGE: DC TO 2,000 MHz

SIZE A **FSCM NO. 53919**

CAD FILE 071702

SCALE N/A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.