


Dual Concentric Rotary Attenuators

Model	Frequency Range	Attenuation Range	Attenuation Accuracy	VSWR	Insertion Loss	RF Connectors
50DR-003	DC-1000 MHz	0-50 dB in 1 dB steps	+/- .2 dB DC-250 MHz +/- .5 dB 250-500 MHz +/- 1 dB 500-1000 MHz	1.1:1 maximum DC-250 MHz 1.2:1 maximum 250-500 MHz 1.4:1 maximum 500-1000 MHz	.5 dB maximum	BNC,N,SMA or TNC female
75DR-003	DC-1000 MHz	0-50 dB in 1 dB steps	+/- .2 dB DC-250 MHz +/- .5 dB 250-500 MHz +/- 1 dB 500-1000 MHz	1.1:1 maximum DC-250 MHz 1.2:1 maximum 250-500 MHz 1.4:1 maximum 500-1000 MHz	.5 dB maximum	BNC, F, or N female

Model	Impedance	RF Input Power	Operating Temperature	Standard Rotation	I n d e x i n g
50DR-003	50 Ohms	1 Watt average 1000 Watts peak	-20° C to +85° C	Attenuation increases in clockwise direction	30 degrees with stops at minimum and maximum
75DR-003	75 Ohms	1 Watt average 1000 Watts peak	-20° C to +85° C	Attenuation increases in clockwise direction	30 degrees with stops at minimum and maximum

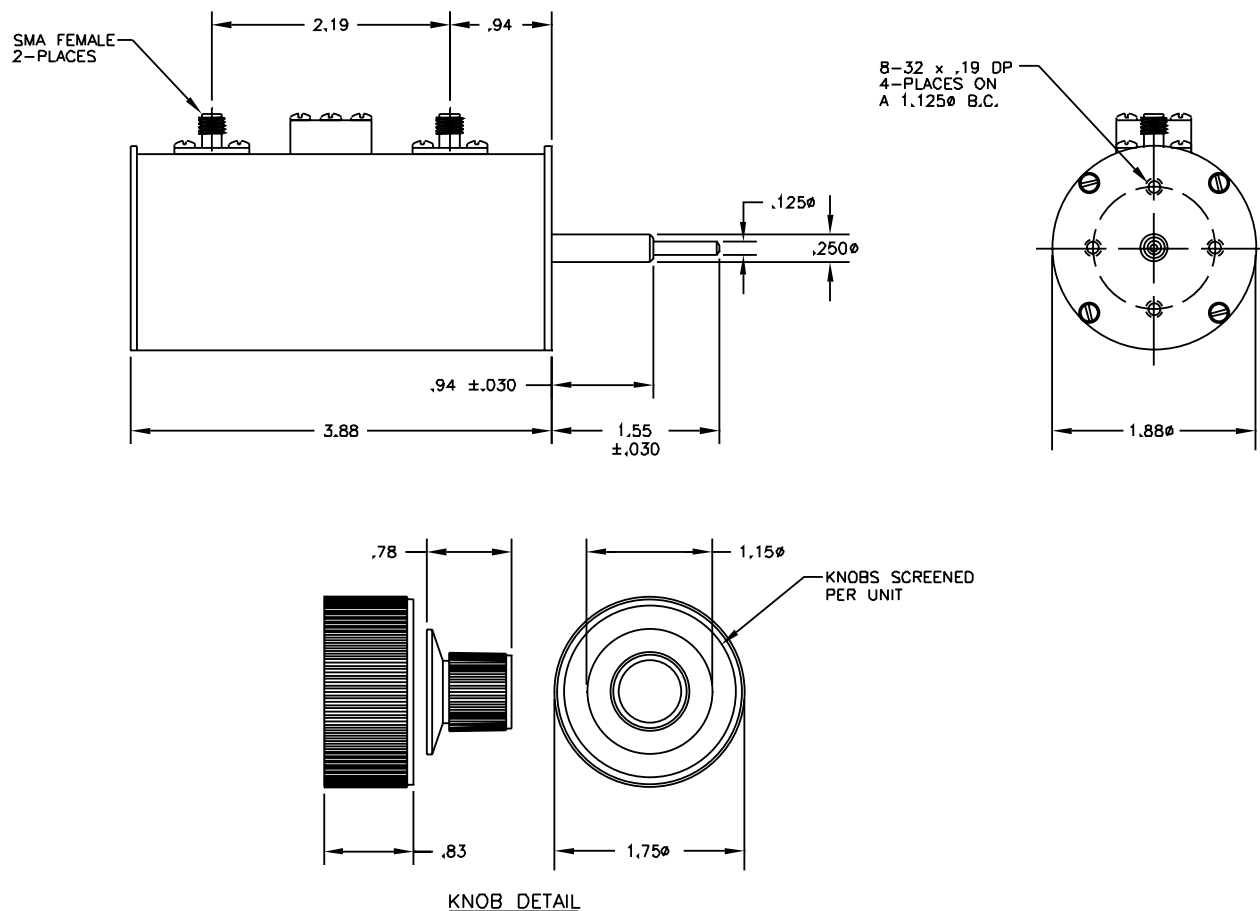

This represents only 10% of our products. For YOUR application, contact JFW at 1-877-887-4JFW or sales@jfwindustries.com