


GAS DISCHARGE TUBE DC-2.5 GHZ

BULKHEAD N F TO N F


R445.G00.000

Series : GDT

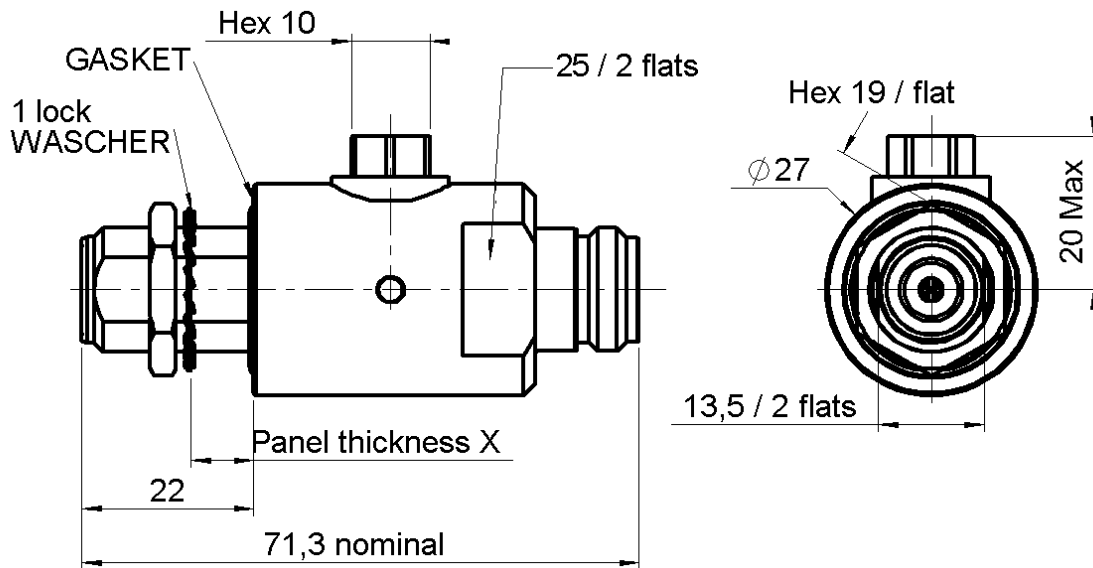


X : mini = 1.5
max = 6

PANEL CUT OUT



mm		
	Maxi	mini
A	16.1	16
B	13.7	13.6

RADIALL
R445G00000
GDT DC-2.5 GHz
Lot: An Se

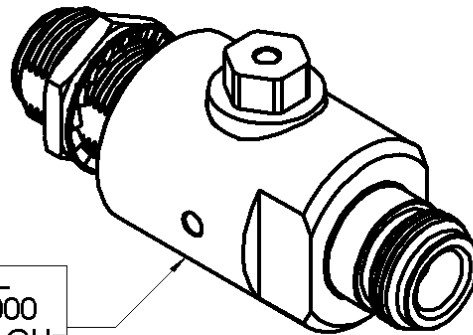

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 3
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ**BULKHEAD N F TO N F****R445.G00.000**Series : **GDT****PACKAGING**

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500	MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA	MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (	100 - F(GHz)) dB Maxi
Residual Voltage	350 V at 2.5	kA (8/20 μ s test pulse waveform)
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	N - FEMALE
Unprotected connector	N - FEMALE
Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	NA N.cm
Panel nut	500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	178.889 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




GAS DISCHARGE TUBE DC-2.5 GHz

BULKHEAD N F TO N F WITH CHAIN


R445.G00.001

Series : GDT

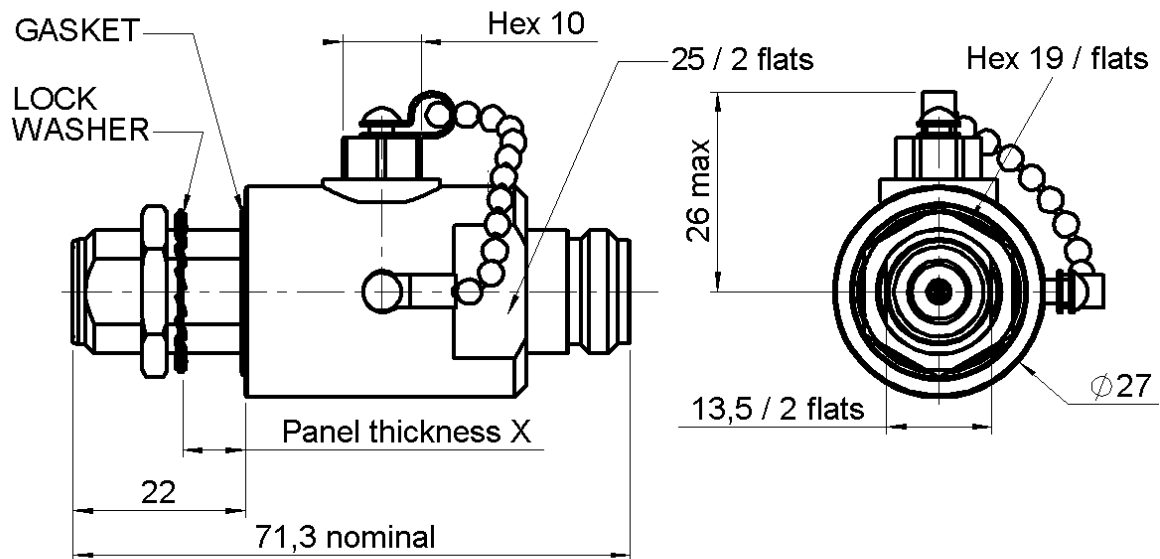


X : mini = 1.5
max = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

etiquette
label
RADIALL
R445G00001
GDT DC-2.5 GHz
Lot: An Se

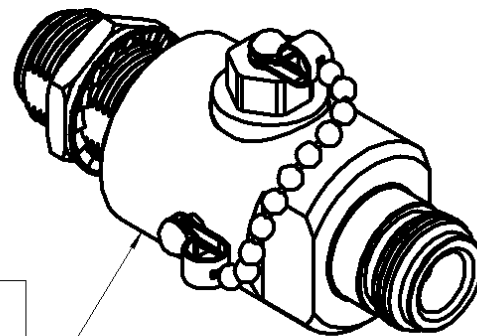

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 3
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD N F TO N F WITH CHAIN

R445.G00.001

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500	MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA	MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (100 - F(GHz))	dB Maxi
Residual Voltage	350 V at 2.5 kA (8/20 μ s test pulse waveform)	
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	N - FEMALE
Unprotected connector	N - FEMALE
Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	NA N.cm
Panel nut	500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	178.889 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




GAS DISCHARGE TUBE DC-2.5 GHZ

BULKHEAD N F TO N M


R445.G00.100

Series : GDT

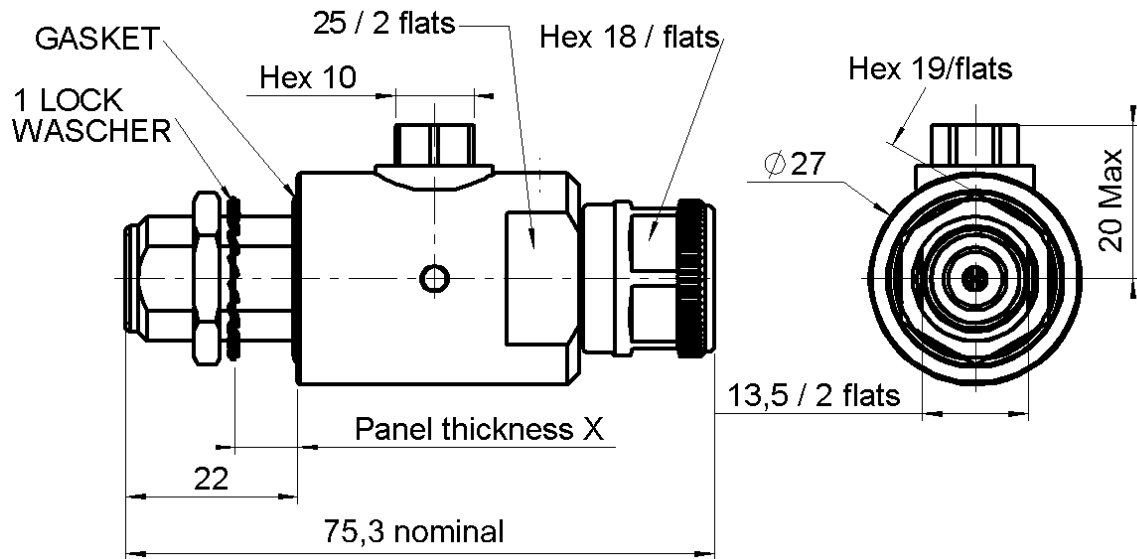


X : mini = 1.5
max = 6

PANEL CUT OUT



mm		
	Maxi	mini
A	16.1	16
B	13.7	13.6

RADIALL
R445G00100
GDT DC-2.5 GHz
Lot: An Se

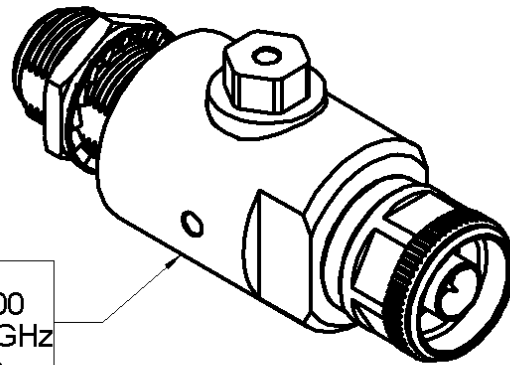

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 3
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ**BULKHEAD N F TO N M****R445.G00.100**

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500 MHz	
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA MHz	
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (100 - F(GHz)) dB Maxi	
Residual Voltage	350 V at 2.5 kA (8/20 μ s test pulse waveform)	
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	N - FEMALE
Unprotected connector	N - MALE
Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	170 N.cm
Panel nut	500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	175.068 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHz
BULKHEAD N F TO N M WITH CHAIN


R445.G00.101

Series : GDT

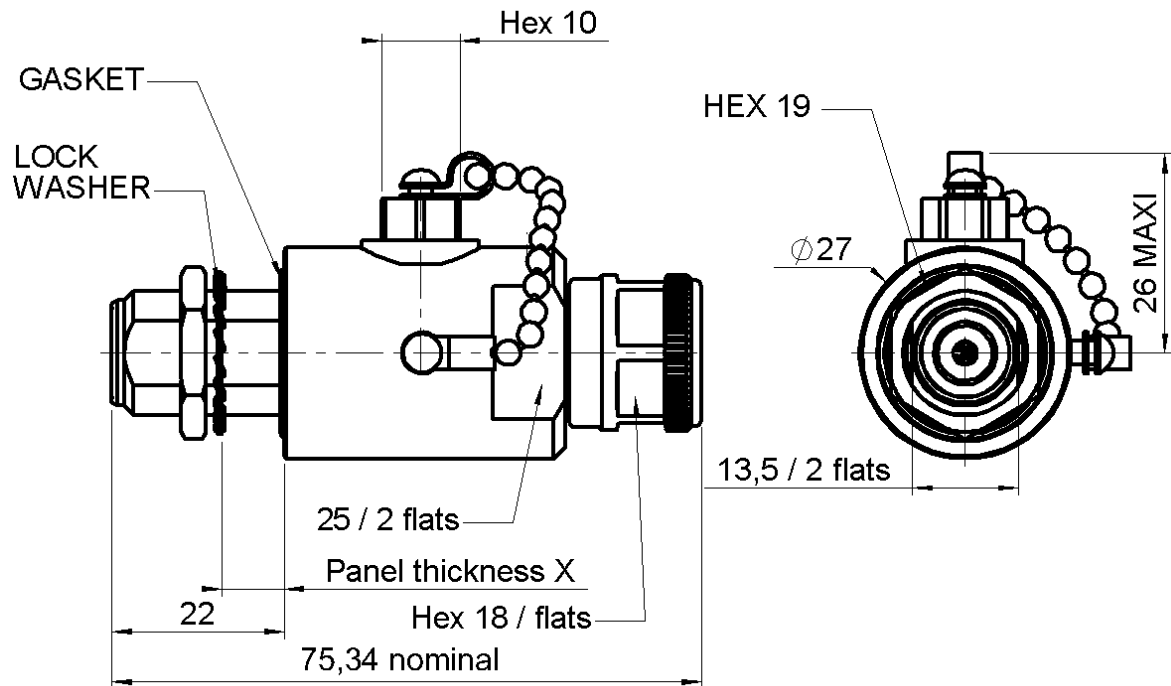


X : mini = 1.5
max = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

RADIALL
R445G00101
GDT DC-2.5 GHz
Lot: An Se

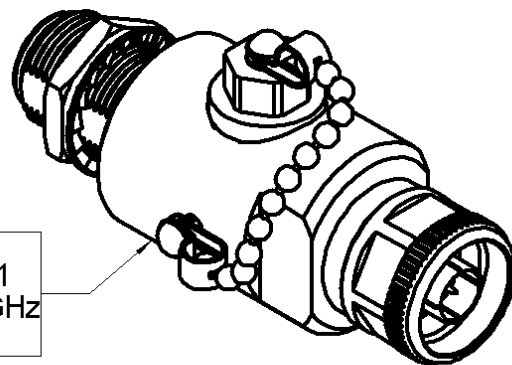

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 3
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0104 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD N F TO N M WITH CHAIN

R445.G00.101

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500	MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA	MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (100 - F(GHz))	dB Maxi
Residual Voltage	350 V at 2.5 kA (8/20 μ s test pulse waveform)	
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	N - FEMALE
Unprotected connector	N - MALE
Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	170 N.cm
Panel nut	500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	177.850 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0104 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




GAS DISCHARGE TUBE DC-2.5 GHz

BULKHEAD N F TO 7-16 F


R445.G01.000

Series : GDT

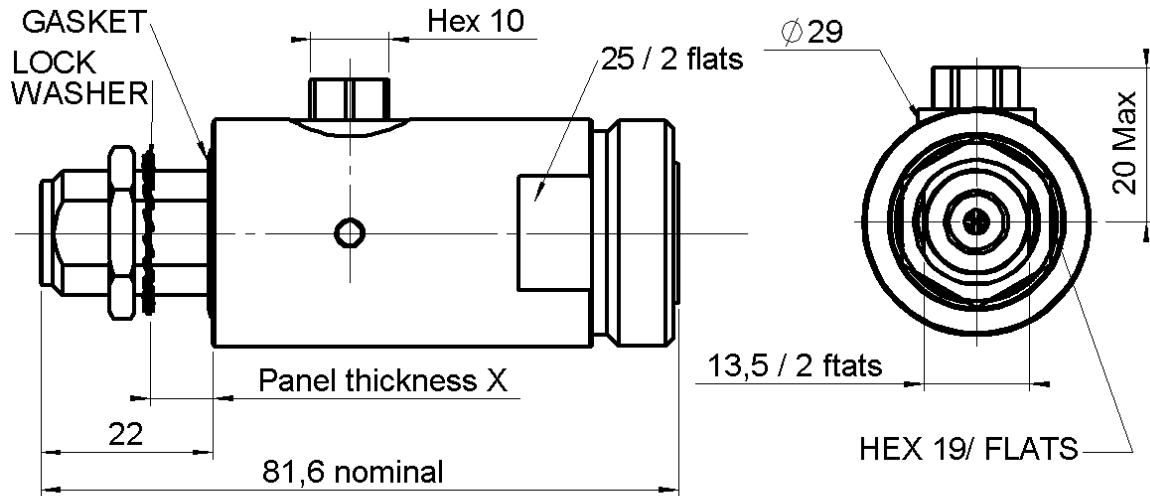

X : mini = 1.5
maxi = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

RADIALL
R445G01000
GDT DC-2.5 GHz
Lot: An Se

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 3
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ**BULKHEAD N F TO 7-16 F****R445.G01.000**

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500	MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA	MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (100 - F(GHz))	dB Maxi
Residual Voltage	350 V at 2.5 kA (8/20 μ s test pulse waveform)	
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	N - FEMALE
Unprotected connector	7-16 - FEMALE
Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	NA N.cm
Panel nut	500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	264.631 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




GAS DISCHARGE TUBE DC-2.5 GHZ

BULKHEAD 7-16 F TO 7-16 F


R445.G02.000

Series : GDT

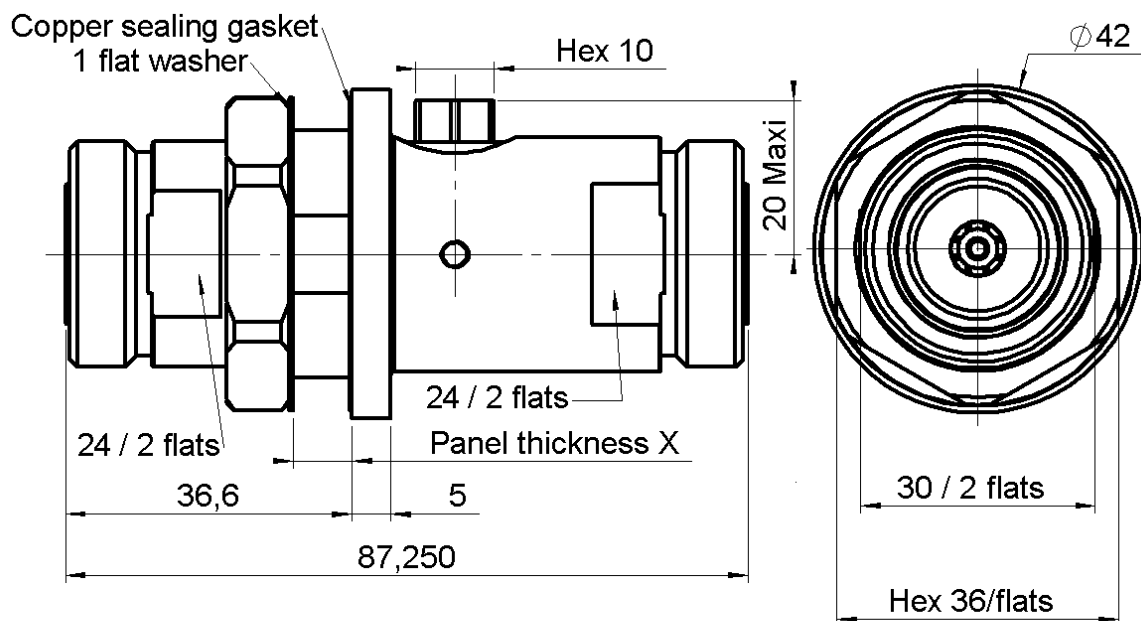


X: mini = 2
max = 7

PANEL CUT OUT



	mm	
	Maxi	mini
A	32.4	32.2
B	30.5	30.3

RADIALL
R445G02000
GDT DC-2.5 GHz
Lot: An Se

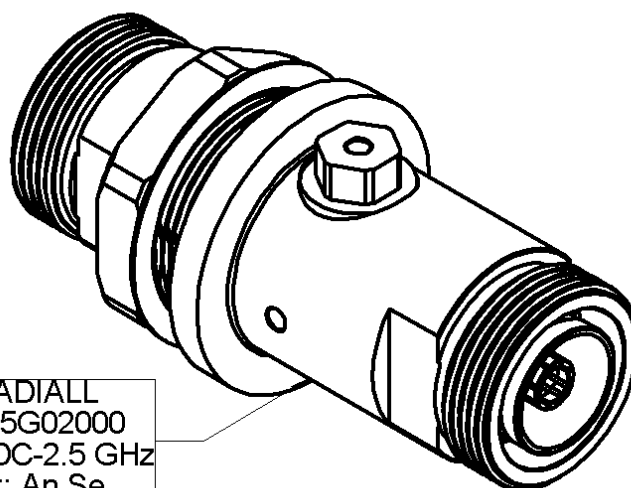

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 5
INSULATOR	PTFE	
GASKET	COPPER	
OTHERS PARTS	BRASS	BBR 2
-	-	
-	-	

Issue : 0103 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ**BULKHEAD 7-16 F TO 7-16 F****R445.G02.000**

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to	2500 MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to	NA MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (	100 - F(GHz)) dB Maxi
Residual Voltage	350 V at	2.5 kA (8/20 μ s test pulse waveform)
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	7-16 - FEMALE
Unprotected connector	7-16 - FEMALE
Center contact retention	
Axial force – Mating end	200 N mini
Axial force – Opposite end	100 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	NA N.cm
Panel nut	3500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	427.716 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 B


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD 7-16F TO 7-16F WITH CHAIN


R445.G02.001

Series : GDT

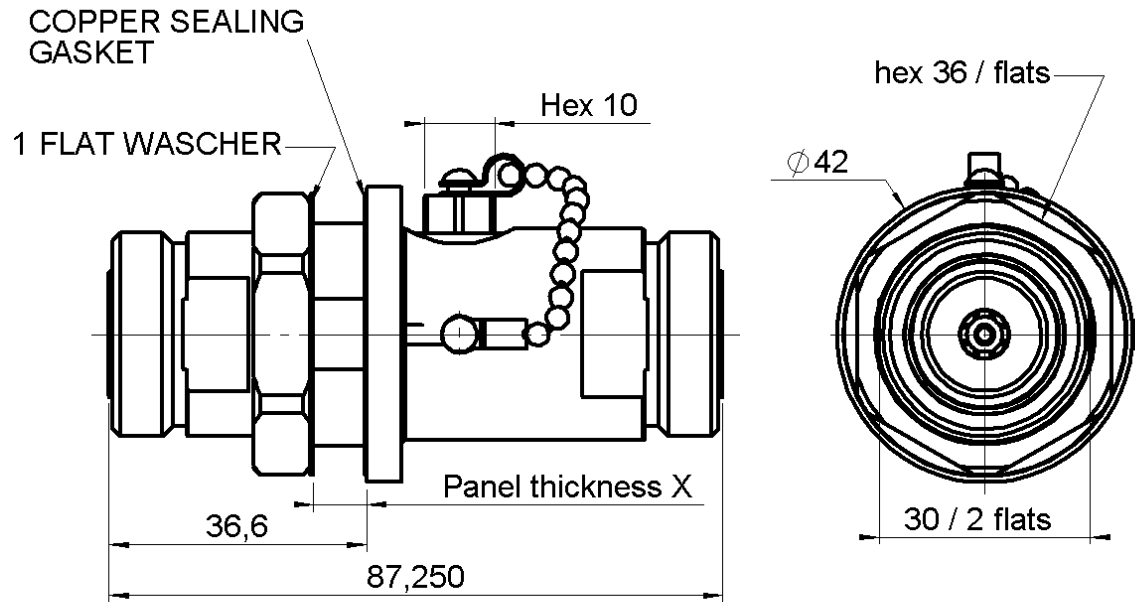


X: mini = 1.5
 max = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	32.4	32.2
B	30.5	30.3

etiquette
 label
RADIALL
R445G02001
GDT DC-2.5 GHz
 Lot: An Se

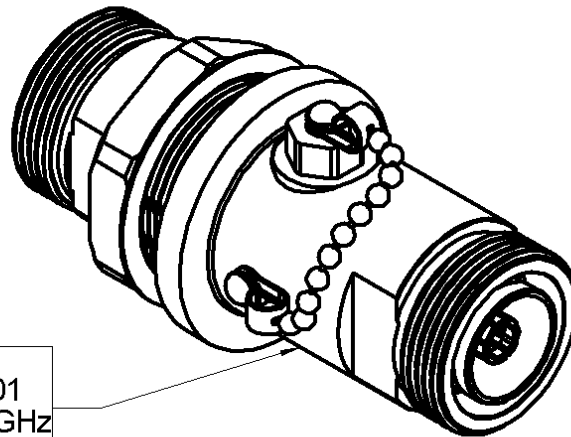

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 5
INSULATOR	PTFE	
GASKET	COPPER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD 7-16F TO 7-16F WITH CHAIN

R445.G02.001

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to	2500 MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to	NA MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (	100 - F(GHz)) dB Maxi
Residual Voltage	350 V at	2.5 kA (8/20 μ s test pulse waveform)
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	7-16 - FEMALE
Unprotected connector	7-16 - FEMALE
Center contact retention	
Axial force – Mating end	200 N mini
Axial force – Opposite end	100 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	NA N.cm
Panel nut	3500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	430.508 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




GAS DISCHARGE TUBE DC-2.5 GHZ

BULKHEAD 7-16 F TO 7-16 M


R445.G02.100

Series : GDT

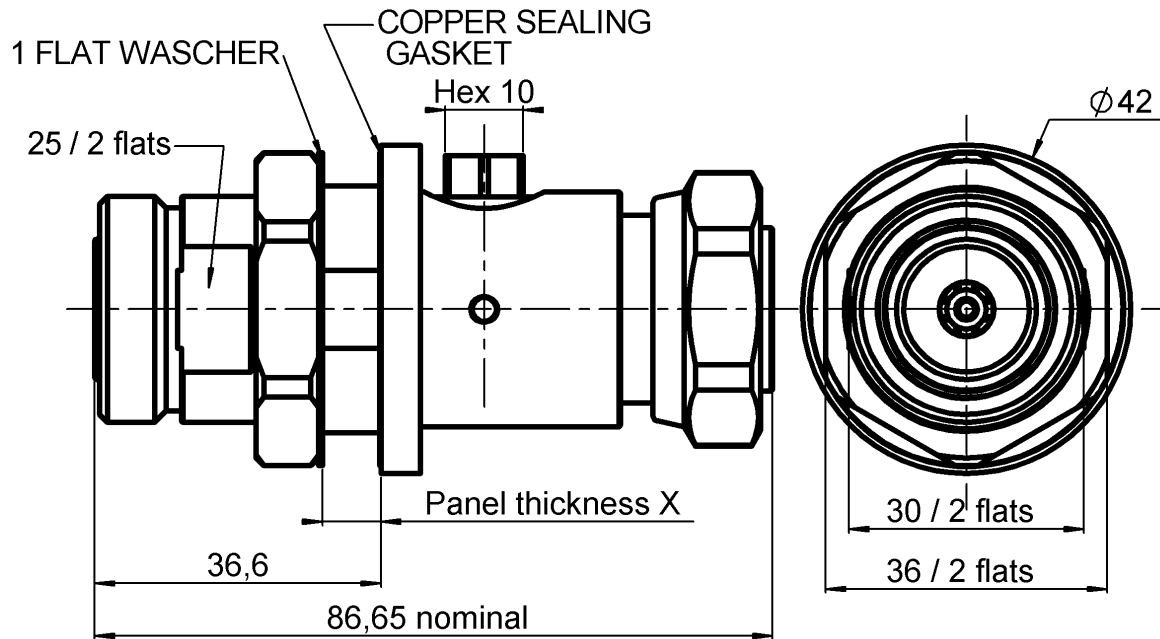


X: mini = 1.5
maxi = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	32.4	32.2
B	30.5	30.3

RADIAL
R445G02100
GDT DC-2.5 GHz
Lot: An Se

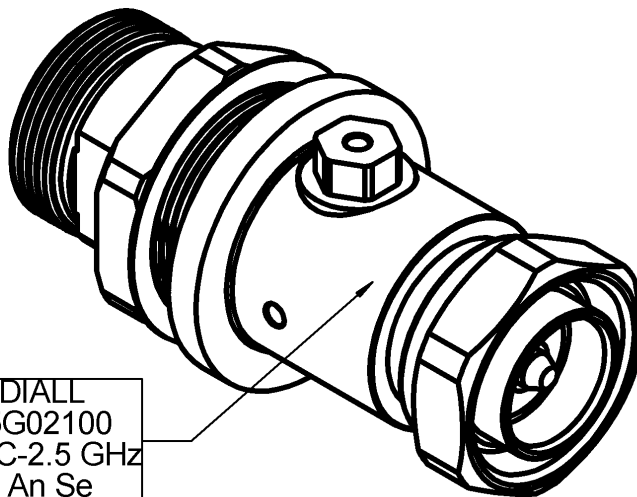

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 5
INSULATOR	PTFE	
GASKET	COPPER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ**BULKHEAD 7-16 F TO 7-16 M****R445.G02.100**

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to 2500	MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to NA	MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (100 - F(GHz))	dB Maxi
Residual Voltage	350 V at 2.5	kA (8/20 μ s test pulse waveform)
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	7-16 - FEMALE
Unprotected connector	7-16 - MALE
Center contact retention	
Axial force – Mating end	200 N mini
Axial force – Opposite end	100 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	3500 N.cm
Panel nut	3500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	426.006 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD 7-16F TO 7-16 M WITH CHAIN


R445.G02.101

Series : GDT

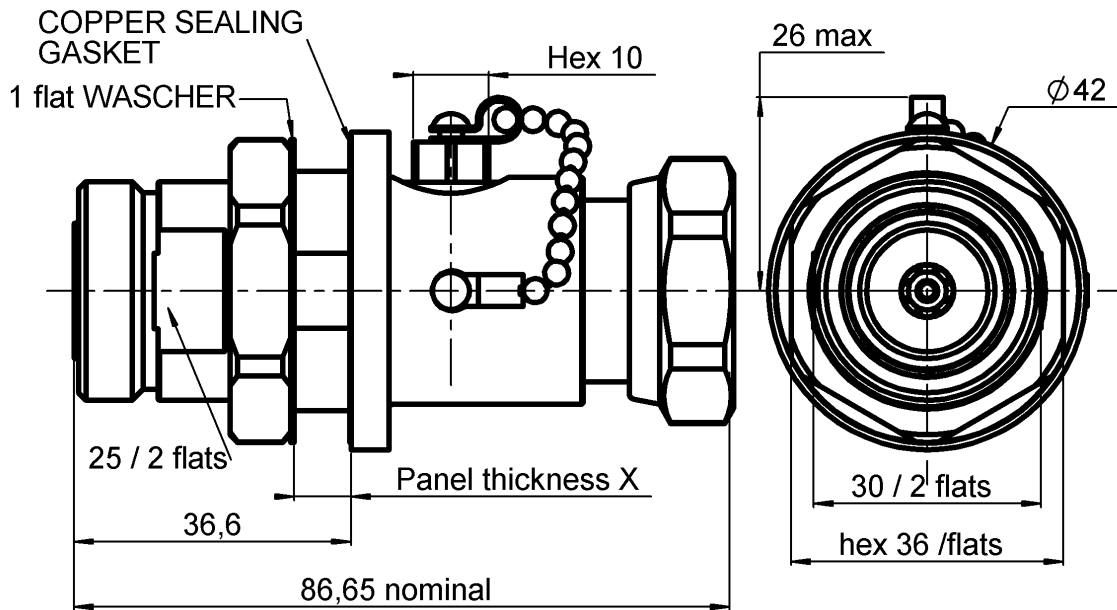


X: mini = 1.5
 maxi = 6

PANEL CUT OUT



	mm	
	Maxi	mini
A	32.4	32.2
B	30.5	30.3

RADIALL
 R445G02101
 GDT DC-2.5 GHz
 Lot: An Se

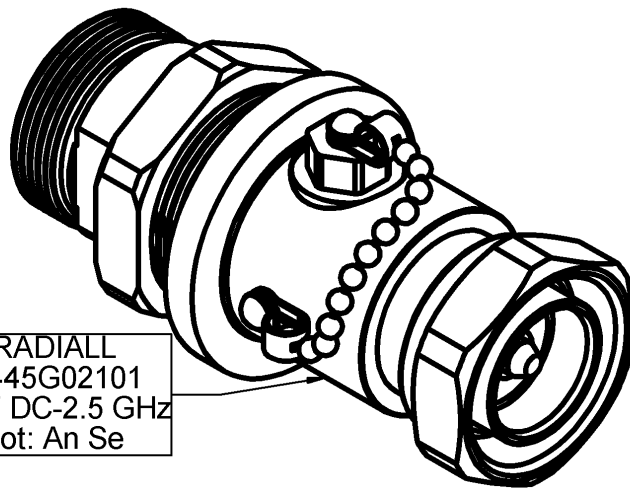

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	BBR-0.5 OVER SILVER 3
CENTER CONTACT	BERYLLIUM COPPER, BRASS	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR-0.5 OVER SILVER 5
INSULATOR	PTFE	
GASKET	COPPER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



GAS DISCHARGE TUBE DC-2.5 GHZ
BULKHEAD 7-16F TO 7-16 M WITH CHAIN

R445.G02.101

Series : GDT

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
First frequency band	0 to	2500 MHz
VSWR		1.2 Maxi
Insertion loss		0.2 dB Maxi
Second frequency band	NA to	NA MHz
VSWR		NA Maxi
Insertion loss		NA dB Maxi
RF leakage	- (	100 - F(GHz)) dB Maxi
Residual Voltage	350 V at	2.5 kA (8/20 μ s test pulse waveform)
Intermodulation		NA dBm (2x20W)

SURGE ARRESTER CAPSULE

(Not supplied)

Form	BUTTON METAL-CERAMIC DIA8x6
Radiall part number :	SEE TDS R4459991**
Recommended torque for nut	600 N.cm

OTHERS CHARACTERISTICS

measured with R445.999.103 arrester

MECHANICAL CHARACTERISTICS

Protected connector	7-16 - FEMALE
Unprotected connector	7-16 - MALE
Center contact retention	
Axial force – Mating end	200 N mini
Axial force – Opposite end	100 N mini
Torque	NA N.cm mini
Recommended torque	
Mating (protected)	NA N.cm
Mating (unprotected)	3500 N.cm
Panel nut	3500 N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm
Mating life	500 Cycles mini
Weight	428.799 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	IP67

Issue : 0103 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

