

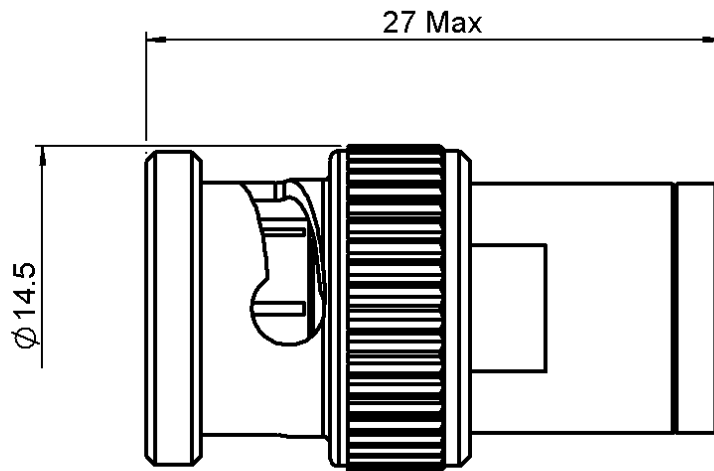



BNC MALE COAXIAL TERMINATION
4 GHZ 1W 50 OHMS
R404.111.000

 Series : **TERMINATION**


SCALE 1:1

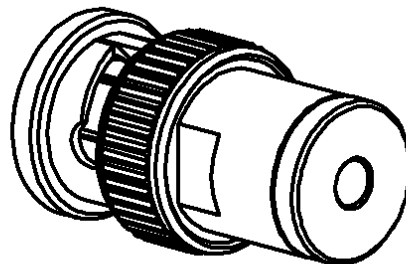

All dimensions are in mm.

| COMPONENTS | MATERIALS | PLATING(μm) |
|-----------------------|------------|-----------------------------|
| BODY | BRASS | NICKEL 2 |
| CENTER CONTACT | BRASS | GOLD 0.7 to 1 over NICKEL 2 |
| OUTER CONTACT | | |
| INSULATOR | PTFE | |
| GASKET | SILICONE | |
| SUBSTRATE | ALUMINA | |
| RESISTOR | THICK FILM | |
| OTHERS PARTS | | |

Issue : 0843 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

BNC MALE COAXIAL TERMINATION**4 GHZ 1W 50 OHMS****R404.111.000**Series : **TERMINATION****ELECTRICAL CHARACTERISTICS**

| | | |
|-----------------|--------|-------|
| Frequency (GHz) | DC - 1 | 1 - 4 |
| V.S.W.R (≤) | 1.08 | 1.20 |


| | | |
|------------------------------------|--------|-----------------------|
| Operating Frequency Range | DC - 4 | GHz |
| Impedance | 50 | Ω |
| DC Resistance | 50 | $\Omega \pm 5\%$ |
| Peak power at 25°C (1 μ s, 1%) | 100 | W |
| Average power at 25°C | 1 | W (Free Air Cooled) |
| | | W (Conduction Cooled) |

MECHANICAL CHARACTERISTICS

| | | | |
|------------|-----------|------|------------|
| Connectors | BNC | MALE | MIL C39012 |
| Weight | 10,7000 g | | |

ENVIRONMENTAL CHARACTERISTICS

| | |
|-----------------------------|--------------|
| Operating temperature range | -55 /+125 °C |
| Storage temperature range | -55 /+125 °C |

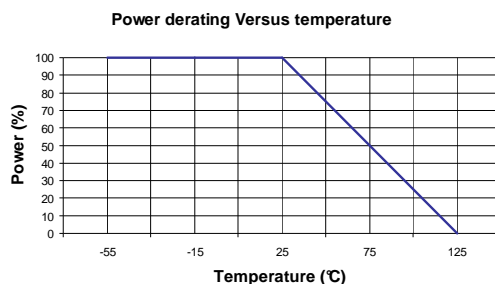**SPECIFICATION****OTHER CHARACTERISTICS****Issue : 0843 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 