




1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	A-7	KJ-DS1111C1-N/3GT3G-316U-50 WAS KJ-DS1111C1-3GT3G-316U-50\N/A\01-22-02'
B	A-1	NO.5 WAS CHANGED\RD-DM91050801Y\05-08-02'

SALES

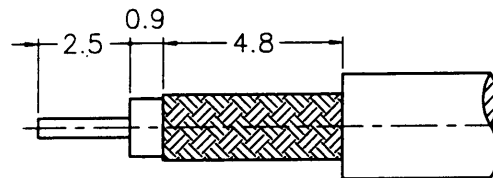

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

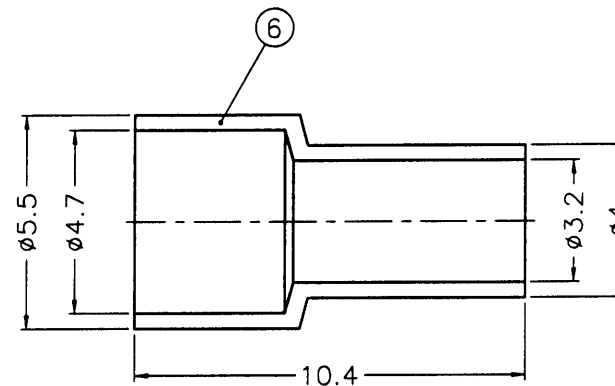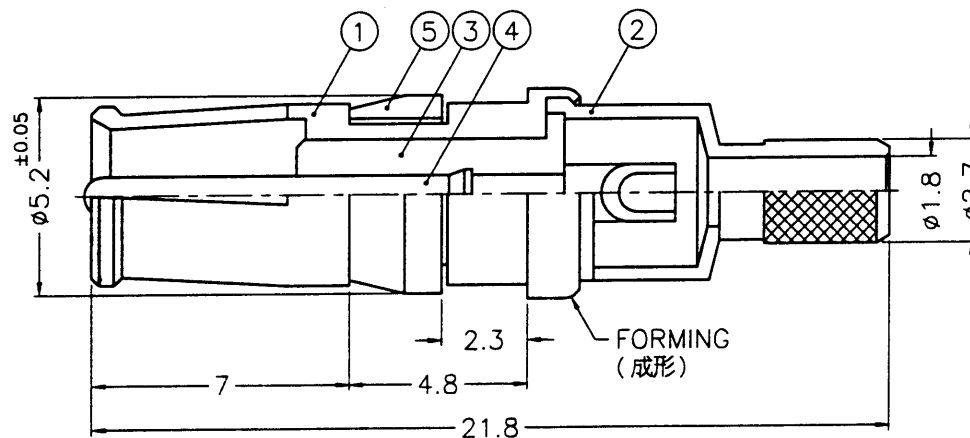

ISSUED
2002.10.09
R&D

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

6	FERRULE	NOTE 1	NOTE 2	1	FR-55/47-4/32X104
5	RETAINER RING	NOTE 1	NOTE 4	1	SZ1111C1-5-C
4	CONTACT PIN	NOTE 1	NOTE 2	1	SZ1111C1-4
3	INSULATOR	NOTE 3	NATURAL	1	SZ1111C1-3T-50-A
2	BARREL	NOTE 1	NOTE 2	1	SZ1111C1-2-27/18-B
1	BODY	NOTE 1	NOTE 2	1	SZ1111C1-1-A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO.	
APPROVED	Andy.C 10-09-02'
CHECKED	Andy.C 10-09-02'
DRAWN	Jay.Y 10-09-02'
FILE NO.	F:\DWG\DS\1111C1\316U-50\N3GT3G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	D-SUB CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)
DRAWING NO.	KJ-DS1111C1-N/3GT3G-316U-50
ITEM NO.	181111AAA36NF5F

1 2 3 4 5 6 7 8

7 RD-DR 15662 8