

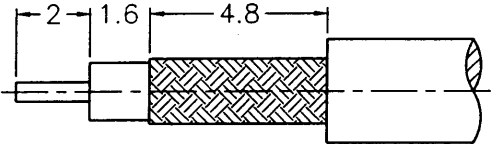


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A	A-7	DS6111C1-N/3GT3G-316U-50 WAS SZ6111C1-3GT3G-316U-50\N/A\10-15-01'

SALES

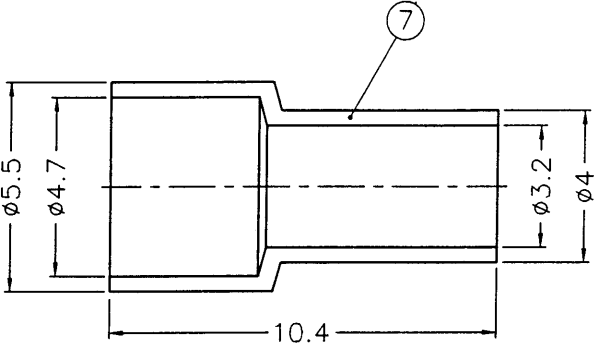

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

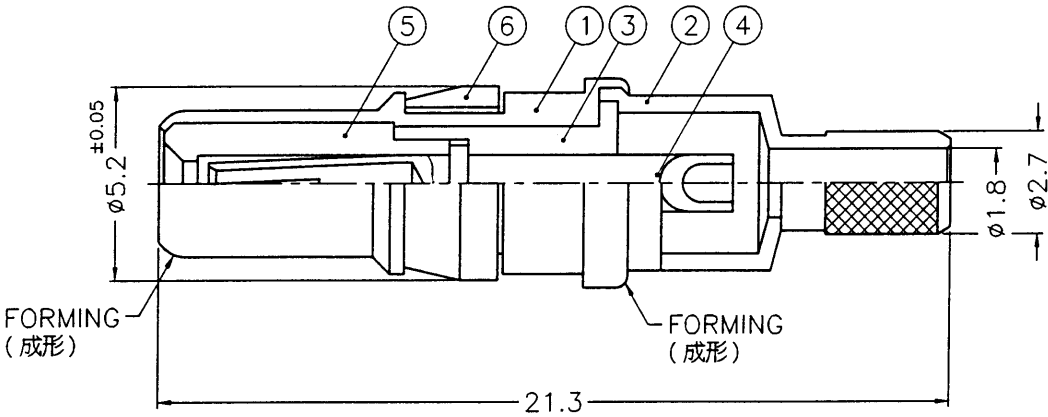

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. PHOSPHOR BRONZE PER QQ-B-750
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. JIS H 3260, C 3501

ISSUED
2001. 10. 16
R&D

1. CRIMPED FERRULE
HEX. CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=6mm

7	FERRULE	NOTE 6	NOTE 4	1	FR-55/47-4/32 X104
6	RETAINER RING	NOTE 1	NOTE 2	1	SZ1111C1-5-B
5	INSULATOR	NOTE 5	NATURAL	1	SZ6111C1-5T-50 -A
4	CONTACT PIN	NOTE 3	NOTE 4	1	SZ6111C1-4-A
3	INSULATOR	NOTE 5	NATURAL	1	SZ6111C1-3T-50 -A
2	BARREL	NOTE 1	NOTE 4	1	SZ1111C1-2-27/18-B
1	BODY	NOTE 1	NOTE 4	1	SZ6111C1-1-A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE
				CHECKED	DATE
				DRAWN	DATE
				FILE NO.	
				ISSUE	

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	D-SUB CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.	KJ-DS6111C1-N/3GT3G-316U-50
ITEM NO.	186111AAA36NF5F