

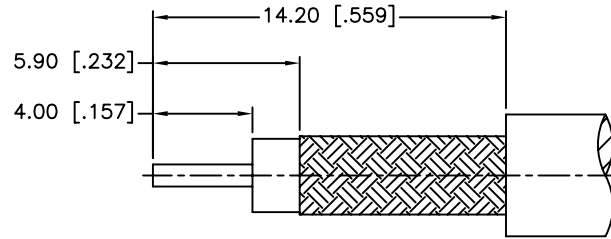
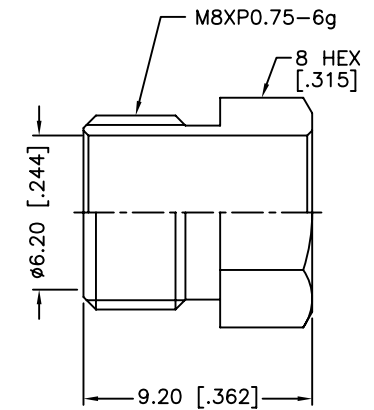
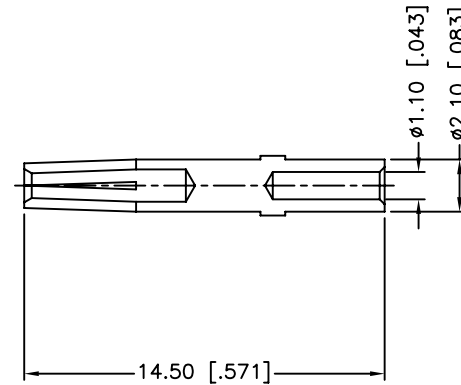


REV.	DATE	ECR NO.	DESCRIPTION
A	05/22/03	XXXXXX	UPDATE DRAWING FORMAT
B	07/22/11	XXXXXX	CHANGE THE MATERIAL OF INSULATOR TO DELRIN

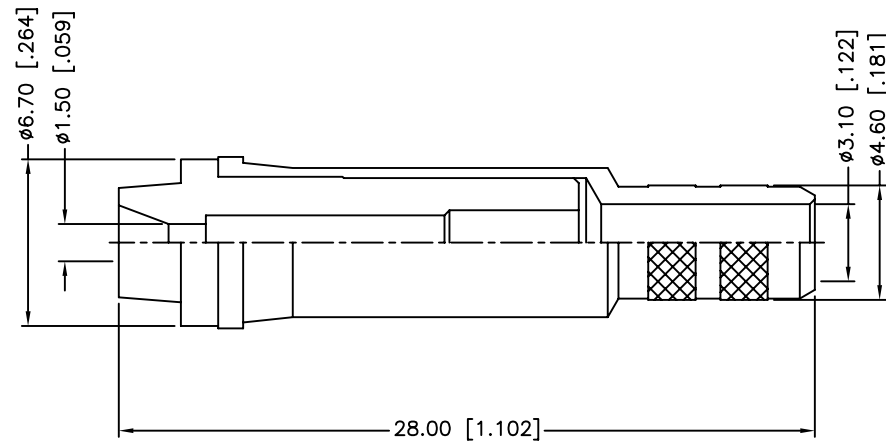

RECOMMENDED
CABLE STRIPPING DIM'S

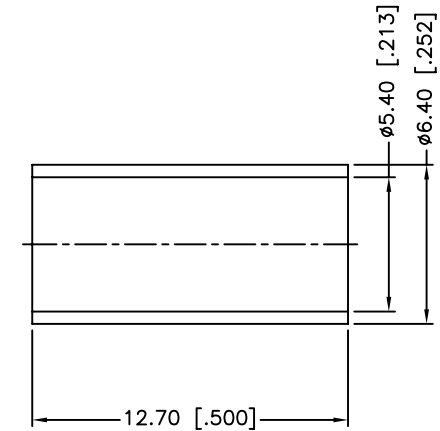

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

5	FERRULE	BRASS	NICKEL	1
4	HEX NUT	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	DELIRIN	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm	± 0.20mm
8 - 30mm	± 0.40mm
30 - 120mm	± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:

.020 - .315	= ± 0.007"
.315 - 1.180	= ± 0.015"
1.180 - 4.724	= ± 0.020"

DO NOT SCALE DRAWING

	APPROVALS	DATE
DRAWN	M.ZHANG	07/22/11
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE		
C:/CONNEX/192102.DWG		

Amphenol Connex

PART	DESCRIPTION	QTY	UNIT	PRICE	AMOUNT	TAX	TOTAL
1	PART DESCRIPTION						
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

FME ROTATING NIPPLE
(FOR RG-58C/U CABLE)

	PART NO.
--	----------

192102

DWG. NO. 192102.DWG

REV. B

SIZE	A
------	---

SCALE	NA
-------	----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[192102](#)