


UNLESS OTHERWISE SPECIFIED LIMITS ON DIMENSIONS ARE:
FRACTIONS $\pm .010$ DECIMALS $\pm .004$ ANGLES $\pm 1^\circ$

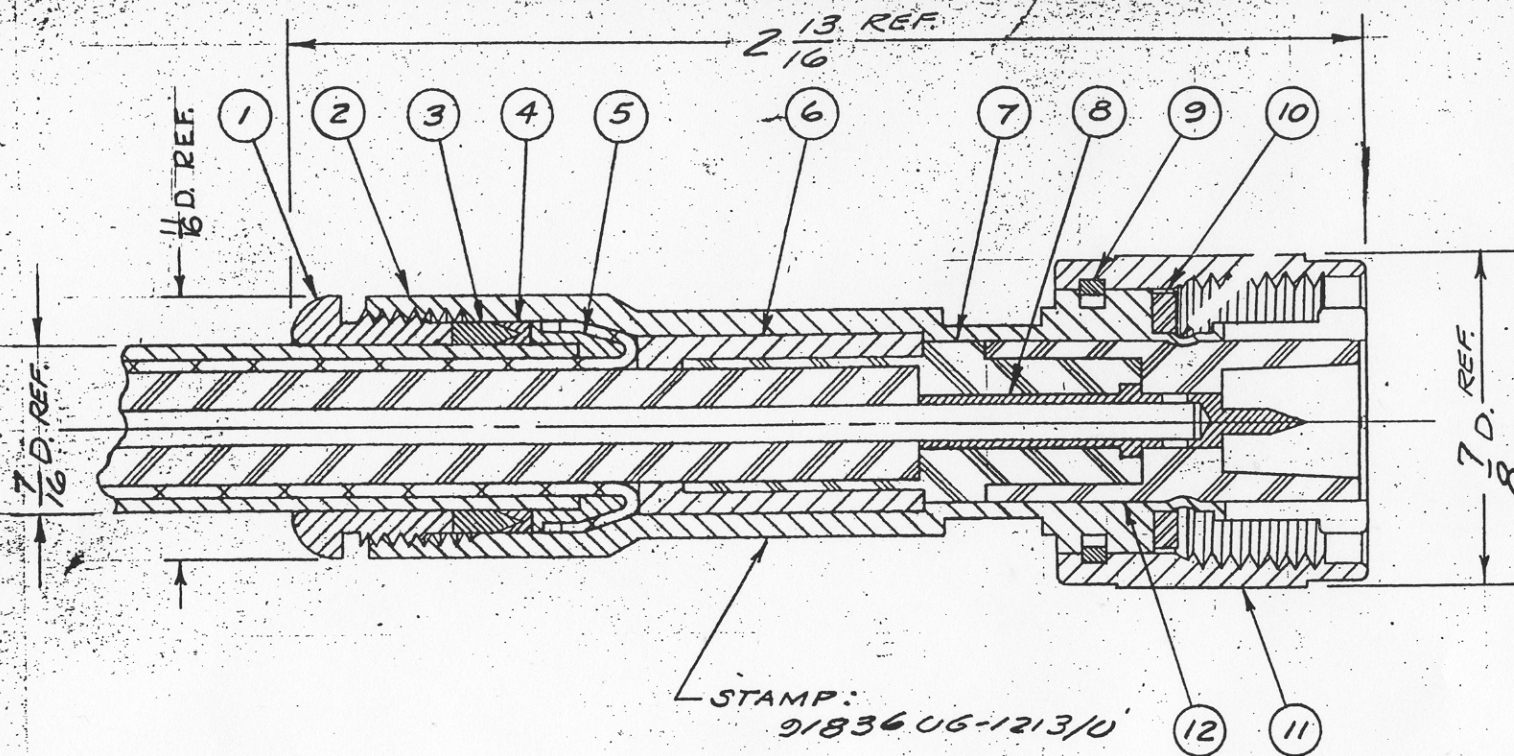

STAMP:
91836 UG-1213/U

FOR USE WITH RG-8, 9, 213 & 214 CABLE GROUPS.

ITEM	REQ'D	DESCRIPTION	DWG. NO.	ITEM	REQ'D	DESCRIPTION	DWG. NO.
6	1	SLEEVE		13	*	CABLING INSTRUCTIONS	
5	1	CLAMP		12	1	INSULATOR	
4	1	WASHER		11	1	COUPLING NUT	
3	1	GLAND		10	1	GASKET	
2	1	BODY		9	1	SPRING	
1	1	CLAMP NUT		8	1	CONTACT	
				7	1	INSULATOR	

ALL DIMENSIONS
PRIOR TO PLATING

REMOVE ALL BURRS, MAINTAIN
SHARP CORNERS UNLESS CHAMFERS.
RADIi OR FILLETS ARE SPECIFIED.

UNLESS OTHERWISE SPECIFIED,
MAXIMUM ACCEPTABLE SURFACE ROUGHNESS IS
100 MICROINCHES RMS IN ACCORDANCE WITH NAS-30

REVISIONS

ISSUE	CHANGES
1	REF. DIMENSIONS ADDED 12-9-57
2	STAMP REVISED 5-29-59
3	ITEM 2 WAS 1213-1 ITEM 9 WAS 212-2 ITEM 10 WAS 1213-5 ITEM 11 WAS 1213-8 1-7-60
4	CN 29532 E EAT 22 DEC 87
5	CN 29706 P AMD 23 MAR 88
6	CN 34063 C JCA 9/10/92

S-D

MASTER
KH-51-01

REF:
REB 49364 B

FINISH

SPEC.

MAT.

SPEC.

CONNECTOR

DRAWN RIBA DATE 12-4-56

APPR. DATE

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y.

UG-1213/U