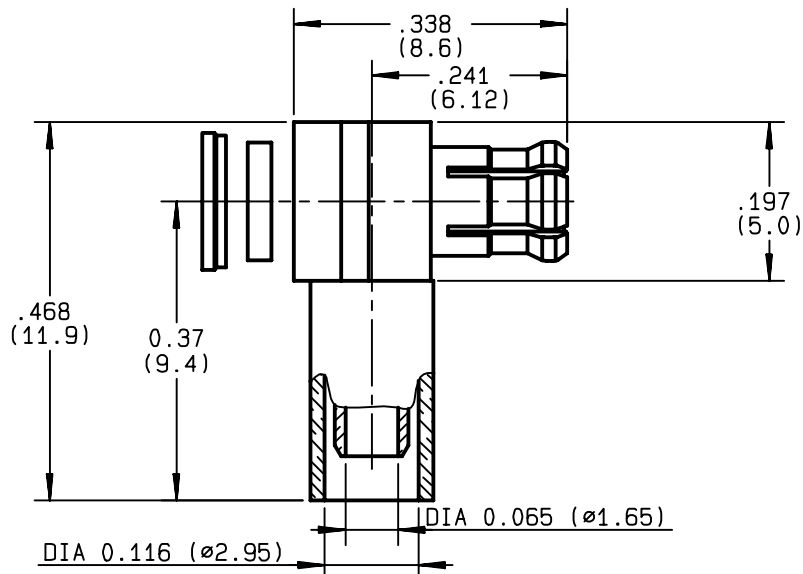


RIGHT ANGLE PLUG CRIMP TYPE
CABLE 2.6/50 S
R113.182.590
SERIES MCX


NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-6	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.10 + .075	$\times F(\text{GHz})\text{Maxi}$
RF INSERTION LOSS	0.1	$\sqrt{F}(\text{GHz}) \text{ dB Maxi}$
VOLTAGE RATING	170	$V_{\text{eff}} \text{ Maxi}$
DIELECTRIC WITHSTANDING VOLTAGE	500	$V_{\text{eff}} \text{ Mini}$
INSULATION RESISTANCE	1000	$M\Omega \text{ Mini}$
HERMETIC SEAL	NA	$\text{Atm.cm}^3/\text{s}$
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT		gr
SPECIFICATION		

CABLES : **KX 22A**
RG 188
RG 316

OTHERS CHARACTERISTICS

CABLE RETENTION	53	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	10	N Mini
Axial force - opposite end	10	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	GOLD 0.2 OVER NICKEL 2	
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2	
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2.54 OVER COPPER 3	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES			

SERIES

ISSUE	CREATION DATE	FILE PART-NUMBER
9841C00	05/02/1992	92-0400-309


RADIALL®

The information given here is subject to change without notice.
 Design changes may be in order to improve the product .

Connect to the future