

# Product Specifications

## F1PNR-HC

Type N Male Right Angle for 1/4 in FSJ1-50A cable

### **OBSOLETE**

#### Replaced By:

F1TNR-HC

Type N Male Right Angle for 1/4 in FSJ1-50A cable



## CHARACTERISTICS

### General Specifications

---

Interface	N Male
Body Style	Right angle
Brand	HELIAX <sup>®</sup>
Mounting Angle	Right angle

### Electrical Specifications

---

Connector Impedance	50 ohm
Operating Frequency Band	0 – 6000 MHz
Cable Impedance	50 ohm
3rd Order IMD, typical	-112 dBm @ 910 MHz
3rd Order IMD Test Method	Two +43 dBm carriers
RF Operating Voltage, maximum (vrms)	565.00 V
dc Test Voltage	1600 V
Outer Contact Resistance, maximum	0.25 mOhm
Inner Contact Resistance, maximum	1.00 mOhm
Insulation Resistance, minimum	5000 MOhm
Average Power	0.4 kW @ 900 MHz
Peak Power, maximum	6.40 kW
Shielding Effectiveness	-110 dB

[www.commscope.com/andrew](http://www.commscope.com/andrew)


©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See [www.commscope.com/andrew](http://www.commscope.com/andrew) for the most current information.

# Product Specifications

F1PNR-HC

## Outline Drawing

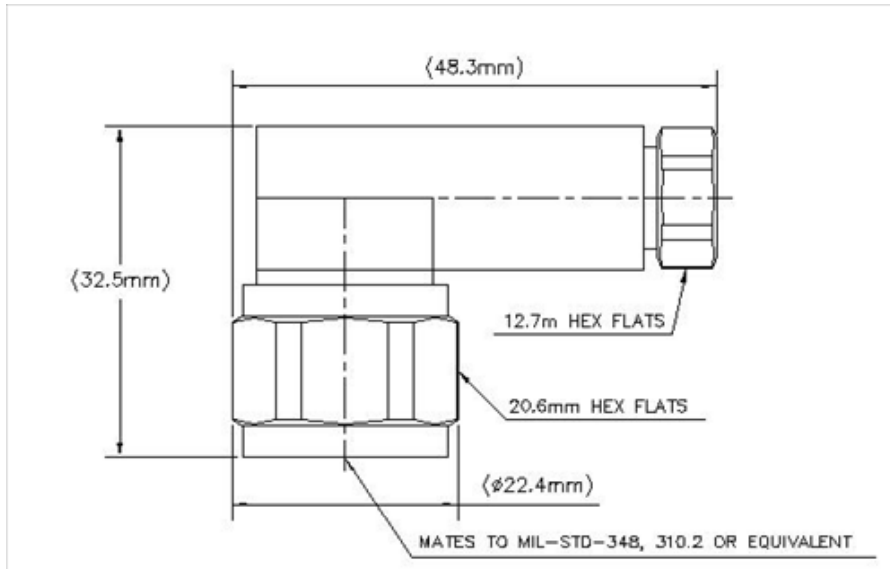

## Mechanical Specifications

Outer Contact Attachment Method	Self-clamping
Inner Contact Attachment Method	Captivated
Outer Contact Plating	Silver
Inner Contact Plating	Gold
Interface Durability	500 cycles
Interface Durability Method	IEC 61169-4:17
Connector Retention Tensile Force	450 N   101 lbf
Connector Retention Torque	1.40 N-m   1.03 ft lb
Insertion Force	124.55 N   28.00 lbf
Insertion Force Method	IEC 61169-16:9.3.5
Pressurizable	No
Coupling Nut Proof Torque	1.70 N-m   1.25 ft lb
Coupling Nut Proof Torque Method	IEC 61169-16:9.3.11
Coupling Nut Retention Force	445.00 N   100.04 lbf
Coupling Nut Retention Force Method	IEC 61169-16:9.3.11

## Dimensions

Nominal Size	1/4 in
Diameter	23.88 mm   0.94 in
Height	20.63 mm   0.81 in
Length	48.26 mm   1.90 in

[www.commscope.com/andrew](http://www.commscope.com/andrew)

# Product Specifications



F1PNR-HC

Right Angle Length	48.26 mm   1.90 in
Weight	100.00 g   0.22 lb
Width	32.51 mm   1.28 in

## Environmental Specifications

---

Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)
Storage Temperature	-65 °C to +125 °C (-85 °F to +257 °F)
Moisture Resistance Test Method	IEC 60068-2-3
Mechanical Shock Test Method	IEC 60068-2-27
Thermal Shock Test Method	IEC 60068-2-14
Vibration Test Method	IEC 60068-2-6
Corrosion Test Method	IEC 60068-2-11

## Standard Conditions

---

Attenuation, Ambient Temperature	20 °C   68 °F
Average Power, Ambient Temperature	40 °C   104 °F
Average Power, Inner Conductor Temperature	100 °C   212 °F

## Regulatory Compliance/Certifications

---

### Agency

RoHS 2002/95/EC  
China RoHS SJ/T 11364-2006  
ISO 9001:2008

### Classification

Compliant by Exemption  
Above Maximum Concentration Value (MCV)  
Designed, manufactured and/or distributed under this quality management system

