


L604/S/Zn or Ni STANDARD COAXIAL CONNECTORS - SOCKETS

A range of complementary coaxial surface mounted sockets for mating with standard plugs. The mating face details meet BS 3041: 1958, IEC 169-2 and DIN 45325 specifications.

IMPEDANCE:	60 – 75 ohms
CAPACITANCE:	≤5 pF
BREAKDOWN VOLTAGE (D.C.):	≥4 kV
INSULATION RESISTANCE:	≥10³ megohms
CONTACT RESISTANCE:	≥100 megohms
TEMPERATURE RANGE(AMBIENT):	-40°C to +70°C
INSERTION / WITHDRAWAL FORCE:	111 N
CABLE SIZE:	Inner 1.2 mm Overall 3.2 – 7.9 mm
MATERIALS: L604/S/Zn :	Zinc plated brass body
L604/S/Ni :	Nickel plated brass body
INSULANTS - INTERNAL:	Polyethylene
CENTRE CONTACT:	Silver plated
ORDERING REFERENCE: L604/S/Zn	L604/S/Ni

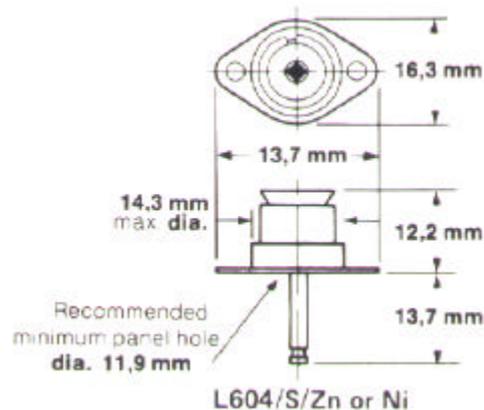

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>