
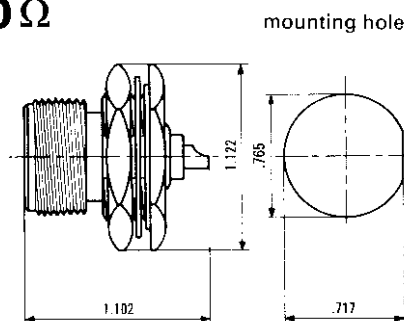


Jack 50 Ω for cable dia. up to .445" continued


Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressurized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
21SC-50-7-1			loose		.425	.285	1	RG-213/U or	3007	
21SC-50-7-2C			captive		.425	.285	1	RG-11 A/U	3008	
21SC-50-7-3			loose		.445	.285	2	RG-214/U or	3007	
21SC-50-7-4C			captive		.445	.285	2	RG-216/U	3008	

Bulkhead Receptacle 50 Ω

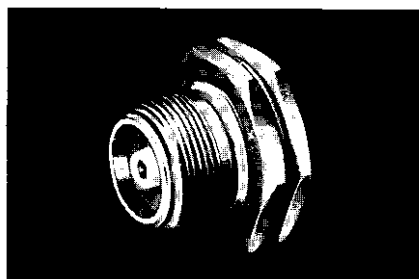


Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressurized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
22SC-50-0-1				yes						panel thickness max. .099"

Panel Receptacle 50 Ω

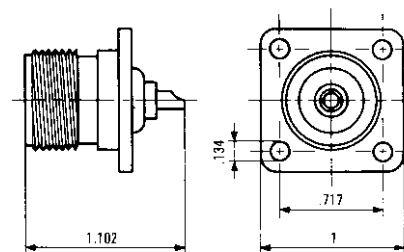

front panel mounting



rear panel mounting

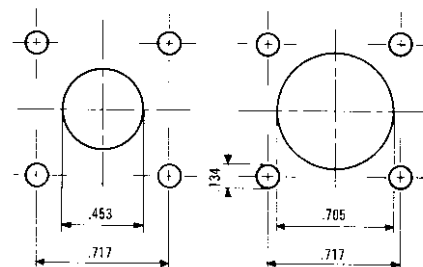

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressurized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
23SC-50-0-2										flange narrow hexagonal 2 holes .134" dia.
23SC-50-0-4										4 holes .134" dia.

Bulkhead Jack 50 Ω




for cable dia. up to .445"

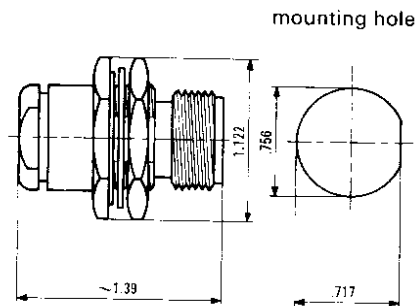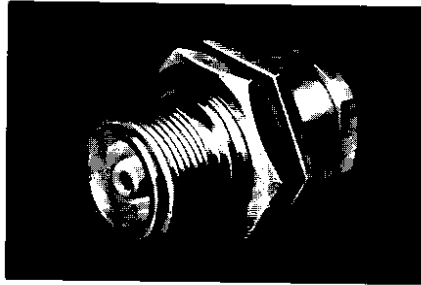

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressurized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
24SC-50-3-1C			captive	yes	.209	.116	1	RG-58 C/U	3045	panel thickness max. .138" with cylindrical gasket
24SC-50-3-2C			captive	yes	.236	.116	2	RG-223/U	3045	
24SC-50-4-1C			captive	yes	.252	.146	1	RG-59 B/U	3045	
24SC-50-5-1C			captive	yes	.338	.189	2	RG-222/U RG-6 A/U	3045	panel thickness max. .138"
24SC-50-7-1C			captive	yes	.425	.285	1	RG-213/U or	3008	
24SC-50-7-2			loose		.425	.285	1	RG-11 A/U	3007	
24SC-50-7-3C			captive	yes	.445	.285	2	RG-214/U or	3008	
24SC-50-7-4			loose		.445	.285	2	RG-216/U	3007	

Panel Jack 50 Ω



for cable dia. up to .445"

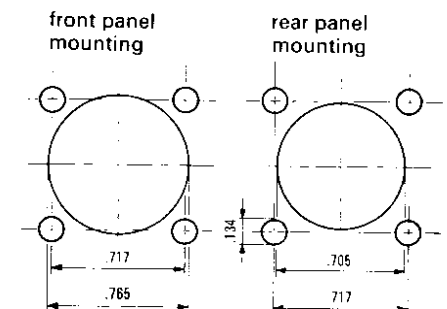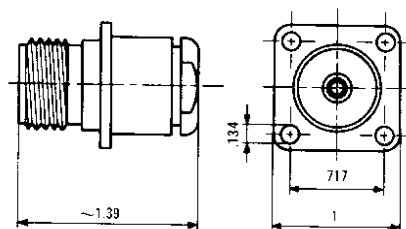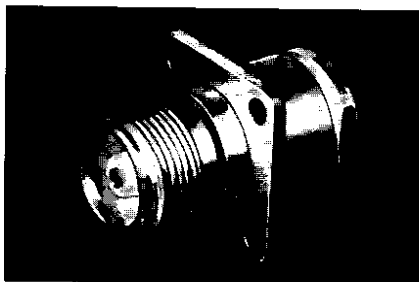

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressurized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
25SC-50-3-2C			captive		.209	.116	1	RG-58 C/U	3045	with cylindrical gasket
25SC-50-3-3C			captive		.236	.116	2	RG-223/U	3045	
25SC-50-4-2C			captive		.252	.146	1	RG-59 B/U	3045	
25SC-50-5-3C			captive		.338	.189	2	RG-222/U RG-6 A/U	3045	
25SC-50-7-3C			captive		.425	.285	1	RG-213/U or	3008	
25SC-50-7-4			loose		.425	.285	1	RG-11 A/U	3007	
25SC-50-7-5C			captive		.445	.285	2	RG-214/U or	3008	
25SC-50-7-6			loose		.445	.285	2	RG-216/U	3007	

Panel Adapter 50 Ω



female

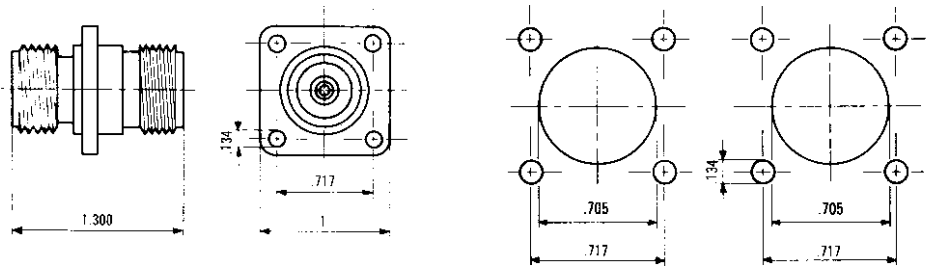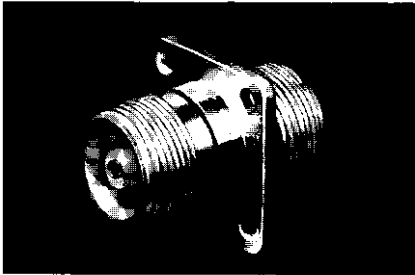

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur-ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
37SC-50-0-2										4 holes .134" dia.



T-Adapter 50 Ω

2 × female, 1 × male

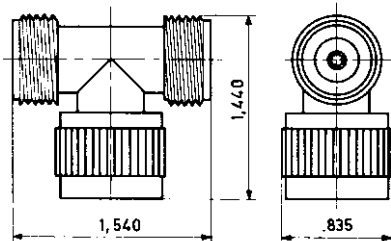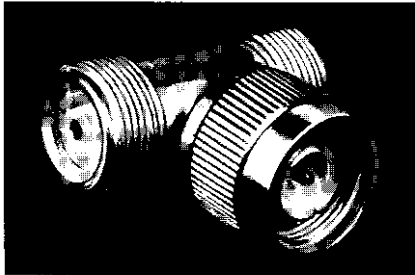

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur-ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
43SC-50-0-1										



Angle Adapter 50 Ω

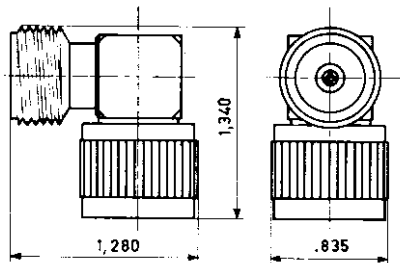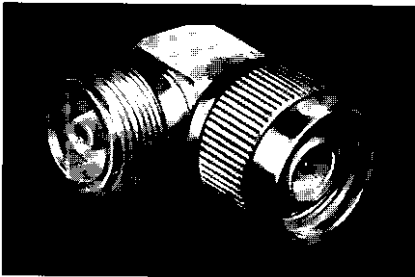

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur-ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
53SC-50-0-1										female – male

Straight Adapter 50 Ω



female

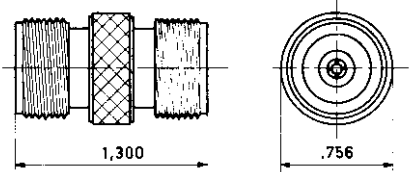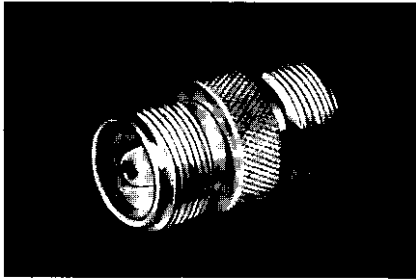

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
31SC-50-0-1										

Straight Adapter 50 Ω



male

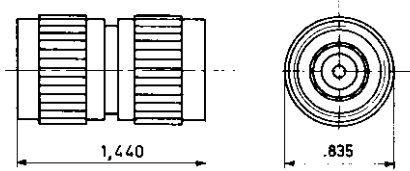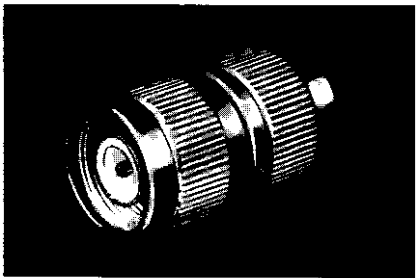

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
32SC-50-0-1										

Bulkhead Adapter 50 Ω



female

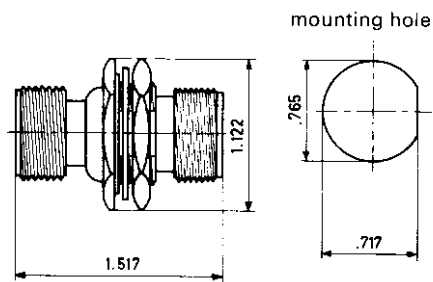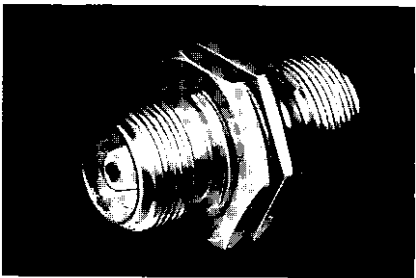

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
34SC-50-0-1				yes						panel thickness max. .099"

Caps



for male connectors

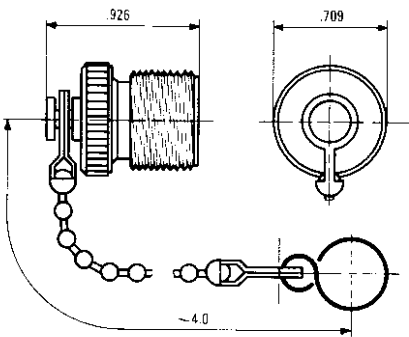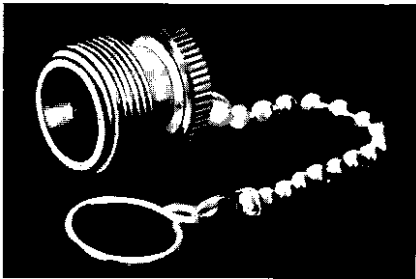

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
61SC-0-0-1										with chain and ring

Caps

for female connectors

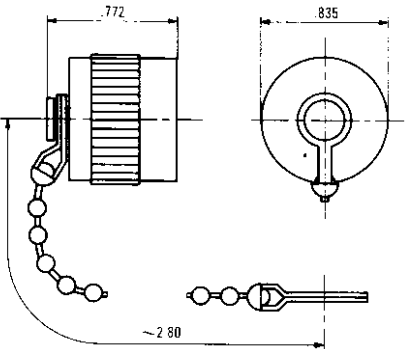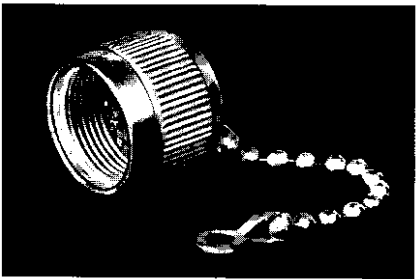

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
62SC-0-0-1										with chain and end clip