


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

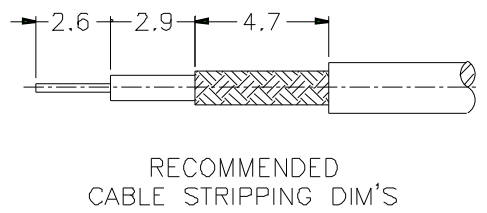

- NOTES. FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. BERYLLIUM COPPER PER QQ-C-530
  4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  5. TEFLON MIL-P-19468

9	HEAT SHRINK TUBING			1	HT-36/3X193
8	FERRULE	COPPER	NOTE 2	1	FR-38/24X55C
7	COVER	NOTE 1	NOTE 2	1	SMA1112A3-8-B
6	GASKET	SILICONE	RED	1	GS-6/43X06
5	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B
4	CONTACT PIN	NOTE 1	NOTE 4	1	SMA1112A4-4-B
3	INSULATOR	NOTE 5	NATURAL	1	SMA1112A3-3T-50
2	HOUSING	NOTE 1	NOTE 2	1	SMA1112A3-2S-17/1
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			PART NO.		
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4			SMA1112A3-3GT50G-14-50		
			APPROVED	DATE	
			CHECKED	DATE	
			DRAWN	DATE	
SCALE	4/1	ISSUE	A	FILE NO.	

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"  
2. CONTACT PIN TO SOLDER

# Amphenol

TITLE SMA R/A CRIMP PLUG  
(FOR RG-178B/U, 196A/U)

DRAWING NO.  
KJ-SMA1112A3-3GT50G-196AU-50

ITEM NO.