




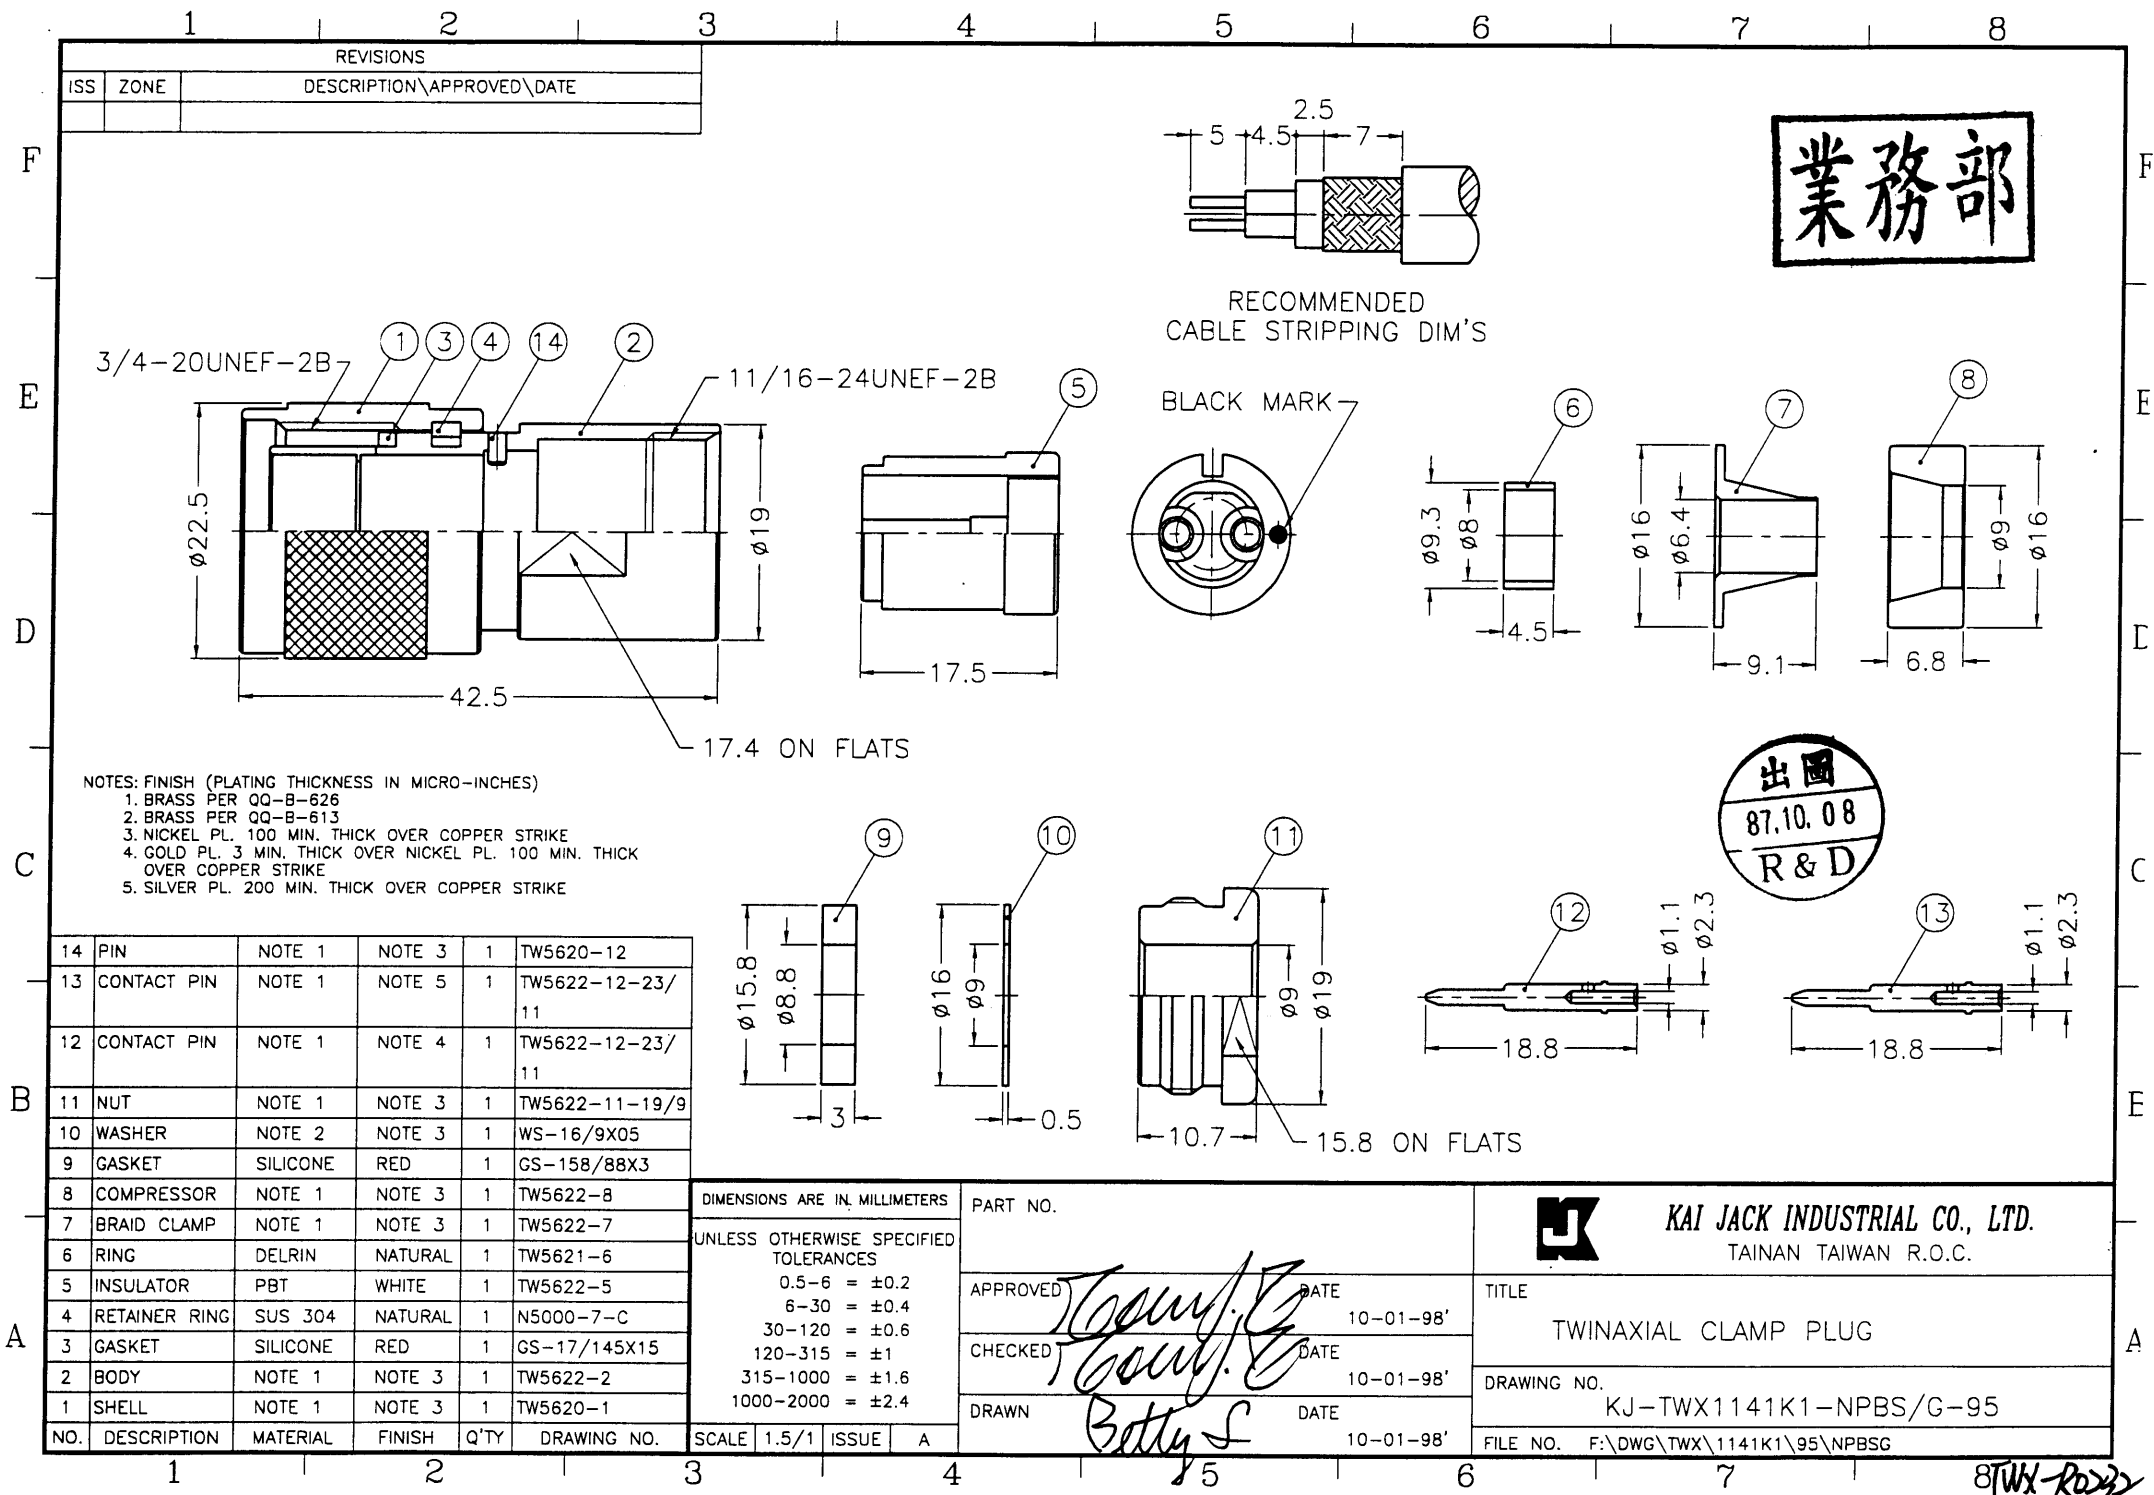


業務部





RECOMMENDED
CABLE STRIPPING DIM'S

BLACK MARK

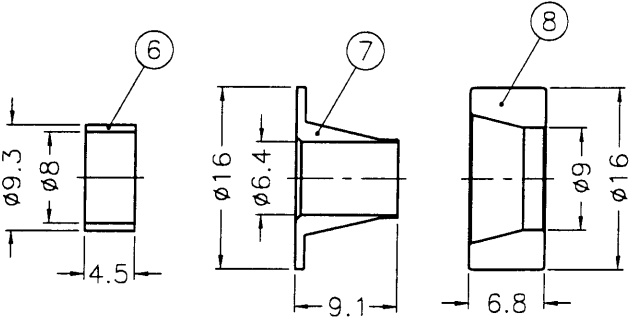

出圖
87.10.08
R & D

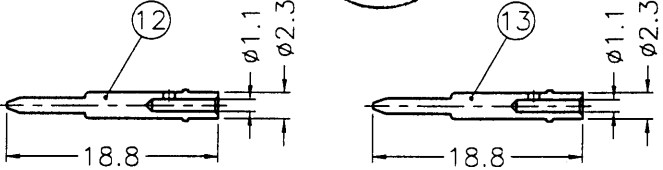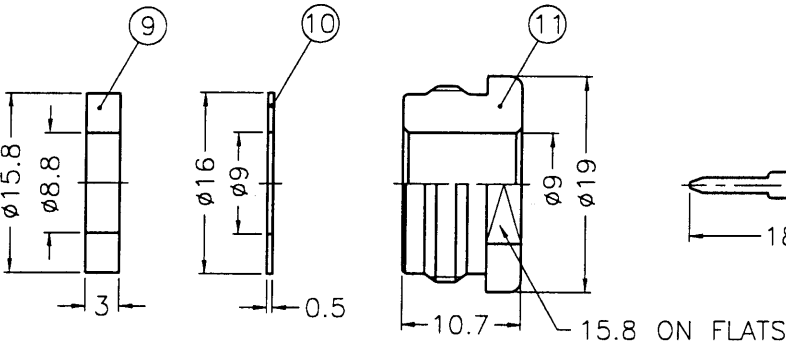

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE

14	PIN	NOTE 1	NOTE 3	1	TW5620-12
13	CONTACT PIN	NOTE 1	NOTE 5	1	TW5622-12-23/11
12	CONTACT PIN	NOTE 1	NOTE 4	1	TW5622-12-23/11
11	NUT	NOTE 1	NOTE 3	1	TW5622-11-19/9
10	WASHER	NOTE 2	NOTE 3	1	WS-16/9X05
9	GASKET	SILICONE	RED	1	GS-158/88X3
8	COMPRESSOR	NOTE 1	NOTE 3	1	TW5622-8
7	BRAID CLAMP	NOTE 1	NOTE 3	1	TW5622-7
6	RING	DELIN	NATURAL	1	TW5621-6
5	INSULATOR	PBT	WHITE	1	TW5622-5
4	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
3	GASKET	SILICONE	RED	1	GS-17/145X15
2	BODY	NOTE 1	NOTE 3	1	TW5622-2
1	SHELL	NOTE 1	NOTE 3	1	TW5620-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		 KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE	
0.5-6 = ±0.2				CHECKED	DATE	
6-30 = ±0.4				DRAWN	DATE	
30-120 = ±0.6				10-01-98'		TITLE
120-315 = ±1				10-01-98'		TWINAXIAL CLAMP PLUG
315-1000 = ±1.6				10-01-98'		DRAWING NO.
1000-2000 = ±2.4				10-01-98'		KJ-TWX1141K1-NPBS/G-95
SCALE 1.5/1				ISSUE A		FILE NO. F:\DWG\TWX\1141K1\95\NPBSG

8TWX-R002