



DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

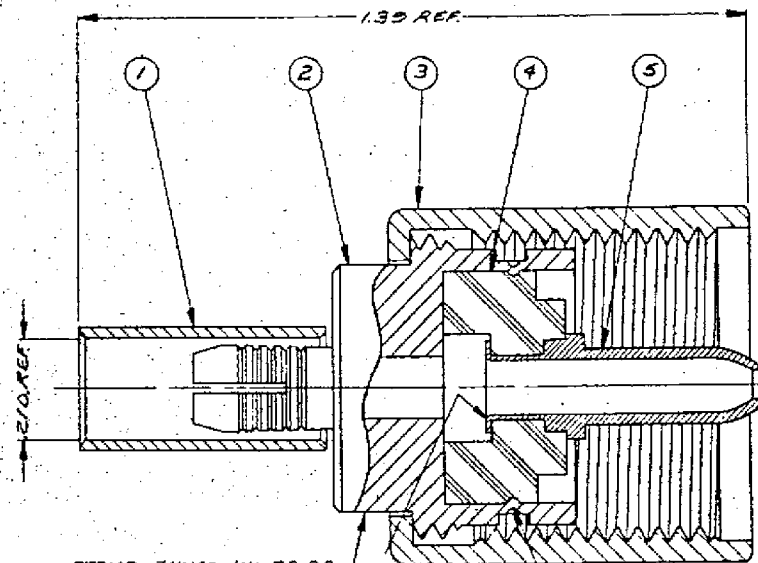

STAMP: KINGS_KU-59-38

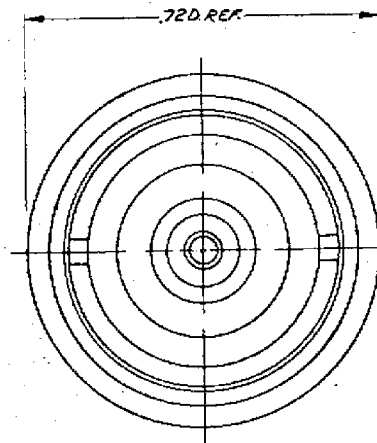

NOTES:

1. FOR USE WITH RG-58, 58A & 58C/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-410.
3. FOR CABLE TRIMMING USE KTV-63 & KTD-34.
4. FOR FORMING USE CRIMP DIE SIZE 01.
5. TR'S FINISH: _____

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 30'$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

5	1	CONTACT	
4	1	INSULATOR	
3	1	COUPLING NUT	U-59-02-A-MC7
2	1	BODY	
1	1	K-GRIP SLEEVE	N-59-29-2-MC7
ITEM	REQ'D	DESCRIPTION	PART NO.

REVISIONS

ISSUE	CHANGES
0	ER 12711 U.G.L. 7 SEP 73
1	CN 26769 C H.Z.B. 20 JUN. 89

KU-59-38

USED ON:

REF:

FINISH

SPEC.

MATL.

SPEC.

UHF PLUG

DRAWN U.G.L. DATE 7 SEP 73

APPR. J.M. DATE 11 SEP 73

KINGS ELECTRONICS
40 MARSHDALE ROAD
TUCKAHOE, N. Y. 10707

KU-59-38

SD