



DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

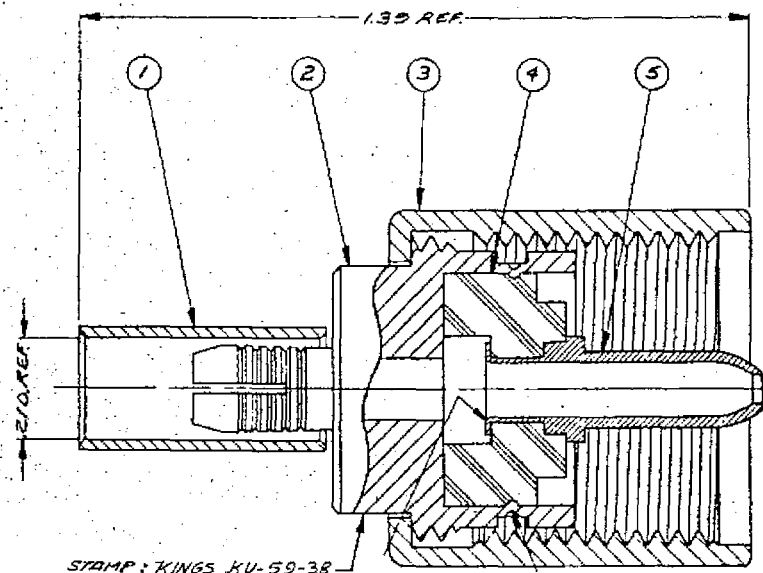

STAMP: KINGS KU-59-38

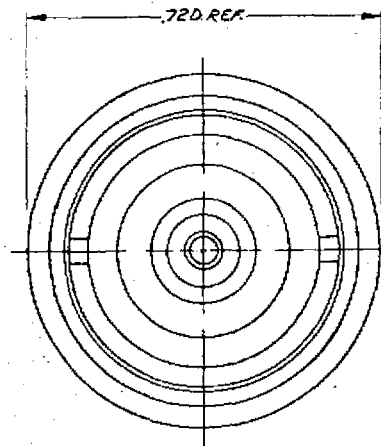

NOTES:

1. FOR USE WITH RG-58, 58A & 58C/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-410.
3. FOR CABLE TRIMMING USE KTU-63 & KTD-34.
4. FOR FORMING USE CRIMP DIE SIZE 01.
5. TFS FINISH.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$ | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS $\pm .004$ | 3. NO FILLETS PERMITTED. |
| T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. |
| | 5. ALL DIMENSIONS PRIOR TO PLATING. |

5	1	CONTACT	
4	1	INSULATOR	
3	1	COUPLING NUT	U-59-02-4-MC7
2	1	BODY	
1	1	K-GRIP SLEEVE	N-59-29-2-MC7
ITEM	REQ'D	DESCRIPTION	PART NO.

REVISIONS

TABLE	CHANGES
0	ER 12711, J.G.L. 7 SEP 73
1	CN 26769 C H.Z.B. 20 JUN. 89

KU-59-38

USED ON:

REF:

FINISH

SPEC.

MATL.

SPEC.

UHF PLUG

DRAWN J.G.L. DATE 7 SEP 73

APPR. J.M. DATE 11 SEP 73

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

KU-59-38