

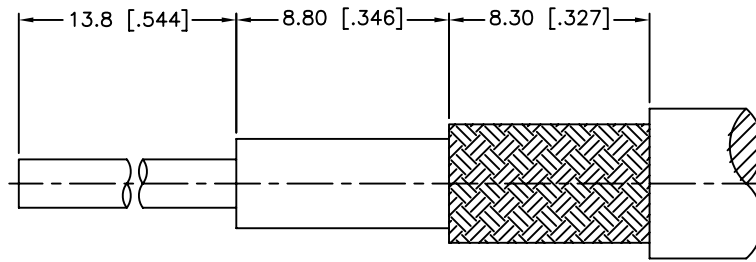


REV.	DATE	ECR NO.	DESCRIPTION
B	10/22/10	XXXXX	MODIFY THE MATERIAL OF ITEM 3

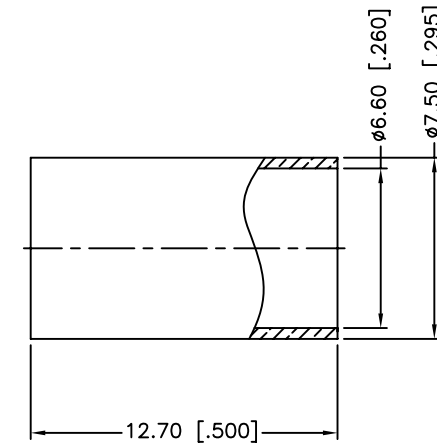

RECOMMENDED
CABLE STRIPPING DIM'S

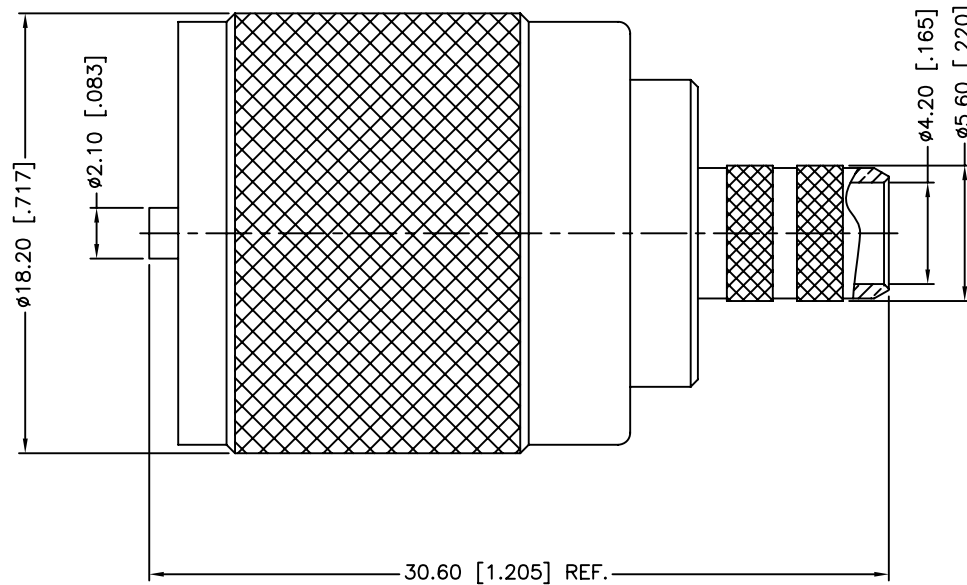

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
DRAWN		M.ZHANG		10/22/10											
CHECKED															
ISSUED						PART DESCRIPTION									
						UHF CRIMP PLUG (FOR RG-8X, LMR240 CABLE)									
SHEET		1 OF 1				PART NO.									
						182115									
CAD FILE		C:/CONNEX/182115.DWG				DWG. NO.		182115.DWG		REV.	B	SIZE	A	SCALE	NA