

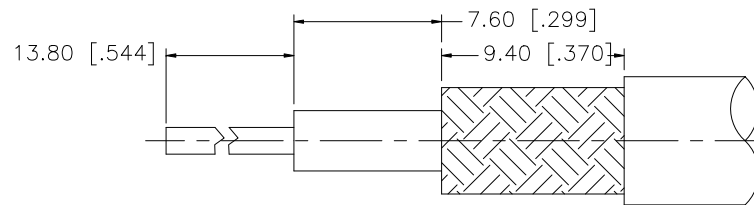


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/08/02	—	INITIAL RELEASE
A	10/03/07	—	REVISE CABLE CALL OUT, UPDATE DRAWING FORMAT
B	03/16/09	—	REVISE PART DESCRIPTION

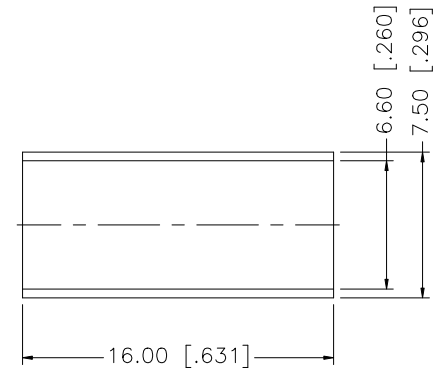

RECOMMENDED CABLE
STRIPPING DIM'S

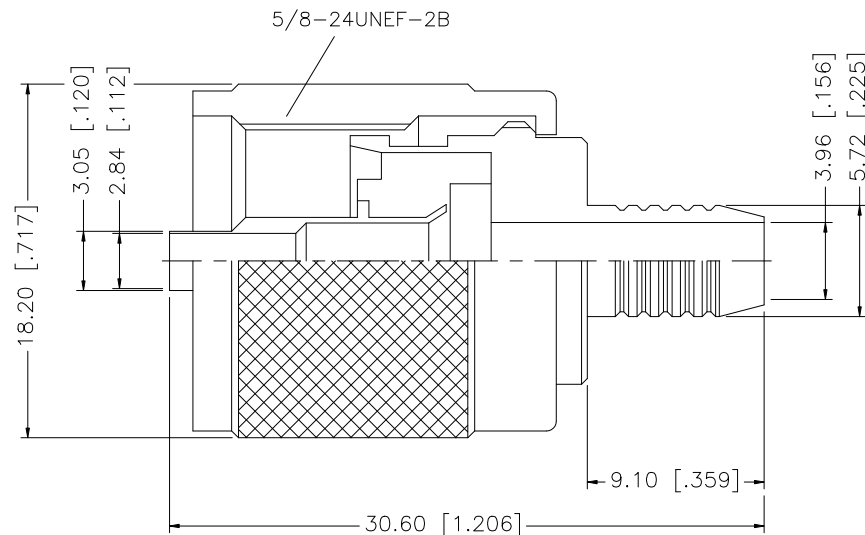

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.54]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	03/16/09						
7						CHECKED								
6						ISSUED				PART DESCRIPTION UHF CRIMP PLUG (FOR RG-59/U CABLE)				
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NICKEL	1						PART NO. 182101-10				
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	PHENOLIC	YELLOW	1						DWG. NO. 182101-10.DWG				
1	BODY/SHELL	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/182/182101-10.DWG					REV. B		SIZE A	SCALE NA	