


GSD

KU-59-54

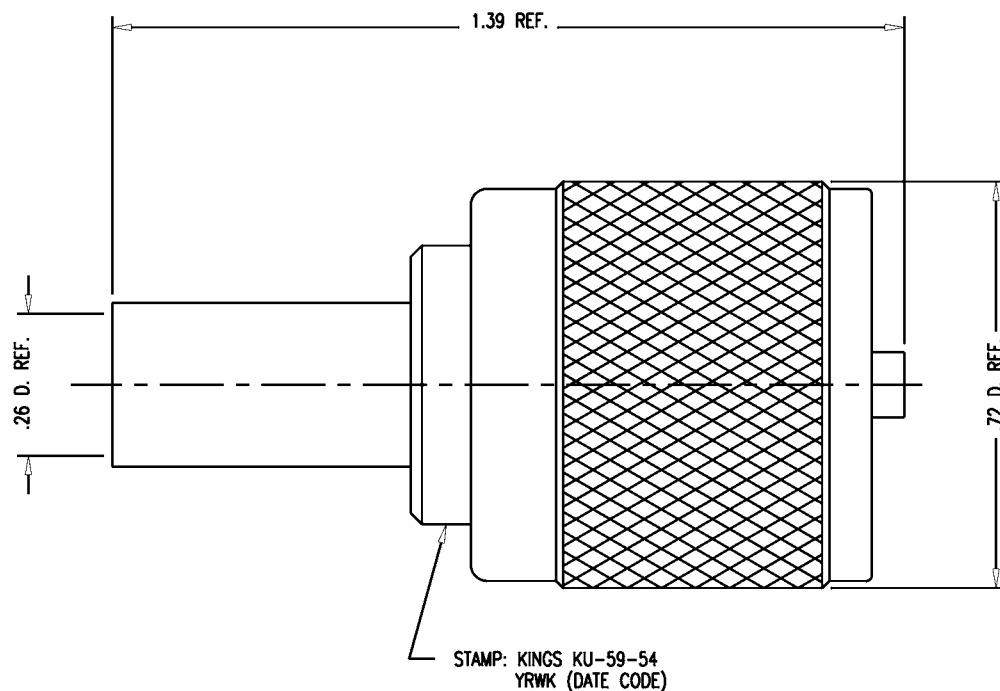

NOTES:

1. FOR USE WITH RG-59, 59A, 59B, 62, & 62 A/U CABLE.
2. FOR CABLE TRIMMING USE KTV-69 & KTD-33.
3. FOR CRIMPING USE DIE SIZE 02.
4. FOR CABLING INSTRUCTIONS SEE CP-410.
5. MATERIALS:
 - INSULATOR: PLENOLIC, PER MIL-M-14
 - K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 - ALL OTHER PARTS: BRASS, ASTM-B16
6. FINISHES:
 - CENTER CONTACT: SILVER PLT. PER QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: NON-CONSTANT
 - WORKING VOLTAGE: 500 VRMS
 - FREQUENCY RANGE: DC TO 200 MHz

REVISIONS

ISSUE	CHANGES
4	CN 38237 C REDRAWN TML 04/12/01

KU5954S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, UHF

DRAWN	J.G.	DATE	05/09/67
DESIGN		DATE	
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KU-59-54

GSD