

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	APVD
		ECR-05-017969			09JAN06	FWK

NOTES:

- 1

PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Ag PLATING
- 4

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:DC - 500 MHz

NOMINAL IMPEDANCE:Non Constant

INSULATION RESISTANCE:5000 MOhm

WORKING VOLTAGE:500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE:1500 Volts RMS Max

CONTACT RESISTANCE:

CENTRE CONTACT:3.00 mOhm Max

OUTER CONTACT:2.00 mOhm Max
- 5

MECHANICAL CHARACTERISTICS


COUPLING NUT RETENTION FORCE:445N Min

CABLE RETENTION FORCE:85N Min


DURABILITY:500 Cycles Min
- 6

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:-65 to +165 DegC

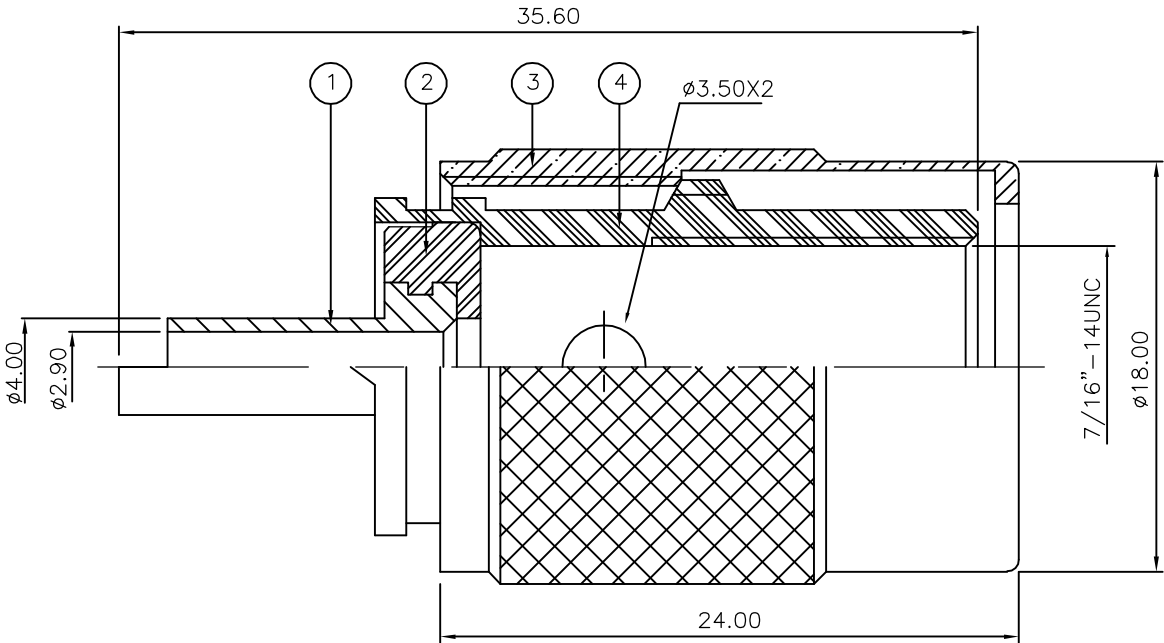

RECOMMENDED
CABLE STRIPPING DIM'S

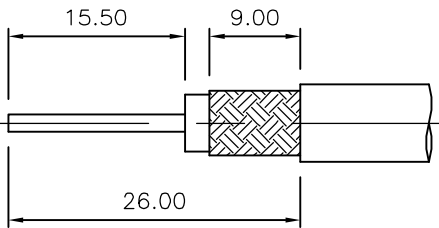

		1	1	BRASS	3	BODY	4
		1	1	BRASS	3	COUPLING NUT	3
		1	1	PTFE		INSULATION	2
		1	1	BRASS	3	CONTACT	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM

QUANTITY PER ASSY		PARTS LIST	
tyco Electronics Tyco Electronics Corporation Bideford EX39 4HE			
NAME			
UHF TWIST-ON STRAIGHT PLUG RG8A/U, 9B/U, 213/U, 214/U, URM67, 91, KX4, KX13, KX24			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337474	—
		SCALE	SHEET
		NTS	1 OF 1
		REV	C